

1/7/2020

Mr. Tristin Rojeck Vehicle Programs and Compliance Division Environmental Protection Agency 2000 Traverwood, Ann Arbor, MI 48105

Subject: Request for issuance of a new COC - Initial application for MY2020 Model Y - Performance AWD

Tesla, Inc. requests that the EPA issue a Certificate of Conformity for the subject test group.

Attached to this request is the Part 1 Application. Tesla believes that the test group complies with all applicable regulations contained within Title 40 of the CFR, California Amendments to Subparts B, C, and S, Part 86 and Part 88, Title 40 of the CFR and Title 13 of the California Code of Regulations

Vehicle Category: Light Duty Vehicle (< 8000 lbs. GVW) LTSLV00.0L2Y **Durability Group:** Test Group: LTSLV00.0L2Y **Summary Sheet No:** NA **Durability Group Description:** NA **Durability Vehicle:** NA **OBD Group:** NA Tesla differentiates test groups based on: 1) battery type, **Test Group Description:** 2) number of drive motors, and 3) vehicle line. L - Lithium Ion Battery 2 - AWD Motor Y - Model Y Line of vehicles FEDERAL Tier 3 BIN 0 & CALIFORNIA ZEV Applicable Standards: Model Y - Performance AWD Carlines Covered by this certificate:

Your early review and issuance of the certificate will be greatly appreciated. If you have any questions, please contact me at our office at

Sincerely,

(510) 249-3755

Suraj Nagaraj

Director - Vehicle Homologation

## Contents

1	Communications
1.01	Mailing information
01.01.01	Certification information
01.01.02	Responsible official
3	Facilities, Equipment and Test Procedures
3.01	Procedure to determine mass emissions of the fuel fired heater
3.02	Battery pre-conditioning procedures
3.03	Vehicle Configuration and sub-configurations
3.04	Test Procedures
4	Statement of Compliance
5	Reserved
6	Maintenance
6.01	Test vehicle scheduled maintenance
6.02	recommended customer maintenance schedule
6.03	Lubricants and heater fuels
7	Labels
7.01	Label locations
7.02	
7.02	Sample emission control information label
7.03	California Environmental Performance Index label: 2015 and later
7.04	model years
7.04	Projected sales information
8	General Technical Description
8.01	Description of propulsion system
8.02	Description of motor(s)
8.03	Description of batteries
08.03.01	Battery charging capacity
08.03.02	Self-discharge information
08.03.03	Description of thermal management system
08.03.04	Definition of end-of-life
08.03.05	Description of battery disposal plan
8.04	Description of controller / inverter
8.05	Description of transmission
8.06	Description of climate control system
08.06.01	Electric heat pump
08.06.02	Fuel-fired heater
08.06.03	Climate control system logic
08.06.04	Tamper resistance of climate control system that includes a fuel-
	fired heater
8.07	Description of regenerative braking system
08.07.01	Control logic
08.07.02	Percentage of braking performed on road by each axle
8.08	Description of charger
08.08.01	Proper recharging procedures
08.08.02	Power requirements necessary to recharge vehicle
8.09	Accessories which draw energy from the batteries
8.10	Other unique features (solar panels)
8.11	Description of warning system(s) for maintenance / malfunction
08.11.01	Cut-off terminal voltages for prevention of battery damage
8.12	Description of dyno mode
8.13	Description of coastdown mode
8.14	Description of one-pedal driving mode
9	Running Change vehicle description
10	Road load data

11	Starting and shifting schedules
11.01	Starting
11.02	Shifting
12	Reserved
13	Reserved
14	Reserved
15	Reserved
16	Reserved
17	California Requirements
17.01	Statement of compliance
17.01.01	General statement
17.01.02	Driveability statement
17.02	Supplemental data and certification review sheets
	Engineering evaluation of zero evaporative emissions under any and
17.03	all operating conditions (for vehicles equipped with fuel- fired
	heater only)
17.04	Credits
17.04.01	Description of multi-manufacturer agreements
17.04.02	Credit calculation
17.05	Vehicle safety
17.05.01	All information on safe handling of vehicle
17.05.02	Information on safe handling of battery system
17.05.03	Description of emergency procedures
17.06	Description of fuel-fired heater / fuel tank evaporative system
18	Fuel Economy Data Vehicle and De-Rating calculations

#### 1 COMMUNICATIONS

#### 1.01 Mailing information

#### 01.01.01 Certification information

Tesla, Inc 3500 Deer Creek Road Palo Alto, CA 94304

#### 01.01.02 Responsible officials

#### 01.01.03 - Primary Contact

Mr. Suraj Nagaraj, Director- Vehicle Homologation Telephone 510 249 8749

#### 01.01.04 - Secondary Contact

Al Prescott, Director - Regulatory Affairs Telephone 240-994-5639

#### **3 FACILITIES, EQUIPMENT AND TEST PROCEDURES**

Internal range test reports are on file at Tesla

#### 3.01 Procedure to determine mass emissions of the fuel-fired heater

Not applicable; vehicle not equipped with a fuel fired heater.

## 3.02 Battery pre-conditioning procedures

The lithium ion battery cells are cycled by the battery cell manufacturer before they are assembled into battery packs. There is no further pre-conditioning necessary.

#### 3.03 Vehicle Configurations and sub configurations

Refer to Appendix 03.03

### 3.04 TEST PROCEDURES

SAE J1634 was followed for all Range testing and SAE J2263 (as issued 2008-12) was followed for Road load measurement.

#### **SPECIAL TEST INSTRUCTIONS**

This vehicle shall only be tested on a 4 wheel dyno.

### **Vehicle Settings**


- $\circ\;$  Battery stabilized on the vehicle for 1000 miles.
- o Vehicle charged to 100% SOC
- o Dyno Mode ON This setting prevents TC faults.
- o Regen Standard
- o Climate OFF
- Headlights OFF
- o Screen brightness set to default (50%)
- o Radio OFF

#### Instrumentation

- $\circ~$  Battery voltage and Current measurement  $\,$  Hioki 3390-10  $\,$
- o AC recharge Hioki 3390-10

#### Lock car upon exit

Pic of Car on Dyno - Tesla Fremont Facility



Pic of Hioki connection - Front Motor



Pic of Hioki connection - DC/ DC to HV BUS





Pic of rear chain to tie on dyno



Pic of Hioki connection - Rear Motor



Pic of Hioki connection - High Voltage Ancillaries (Compressor)



Pic of Front chain to tie on dyno



Pic of rear chain to tie on dyno



## 04.00 Statement of Compliance

This vehicle conforms to US EPA Federal Tier 3 Bin 0 and State of California regulations applicable to 2020 Model Year new ZEV Light-duty Vehicles

## 05.00 RESERVED

## **06.00 MAINTENANCE**

#### 6.01 Test vehicle scheduled maintenance

Not applicable.

## 6.02 Recommended customer maintenance schedule

See Owner Hand Book.

## 6.03 Lubricants and heater fuels

**Heater fuel:** 

### **Transmission Lubricant:**

Capacity
Make
Trade name
Type
Viscosity
Viscosity

Test Vehicle
Same as factory fill

# 07.00 LABELS

## 07.01 Label locations


**VECI** Emission Label

## Not applicable

Factory Fill

2750 mL (Rear), 1755 mL (Front)

2750 mL (Rear), 6 SK ZIC ATF - 9 Synthetic 7100 cP at -40°C 5.9 cSt at 100°C

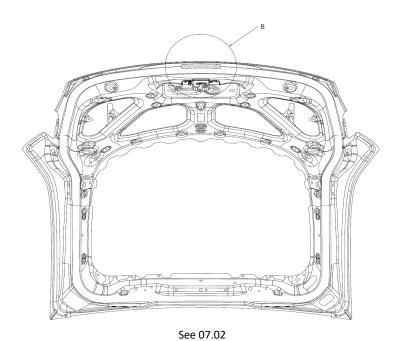



See 07.03

#### 07.02 Emission Control Information label: 2020 Model Year


(Mandated in CFR Title 40, Part 86; §86.1807. Label format agreed with EPA

VEHICLE EMISSION CONTROL INFORMATION / INFORMATIONS SUR LE CONTRÔLE DES ÉMISSIONS DU VÉHICULE
THIS VEHICLE CONFORMS TO U.S. EPA REGULATIONS APPLICABLE TO 2020 MODEL YEAR NEW TIER 3 BIN 0 LIGHT
DUTY VEHICLES AND TO CALIFORNIA REGULATIONS APPLICABLE TO 2020 MODEL YEAR NEW ZEV PASSENGER CARS.
CE VÉHICULE EST CONFORME AUX NORMES DE L'USEPA APPLICABLES AUX VÉHICULES LÉGERS TIER 3 BIN 0 DE L'ANNÉE-MODÈLE 2020. ZERO EMISSION VEHICLE/ VÉHICULES À ZÉRO ÉMISSIONS

MODÈLE 2020 ET AUX NORMES CALIFORNIENNES APPLICABLES AUX VÉHICULES À ZÉRO ÉMISSIONS DE L'ANNÉE-MODÈLE 2020. ZERO EMISSION VEHICLE/ VÉHICULES À ZÉRO ÉMISSIONS

#### 07.03 California Environmental Performance Index label: 2020 Model Year

(Mandated in California Environmental Performance Label Specifications for 2009 and Subsequent Model Passenger Cars, Light-Duty
Trucks and Medium-Duty Passenger Cars. Label format agreed with EPA/ CARB)

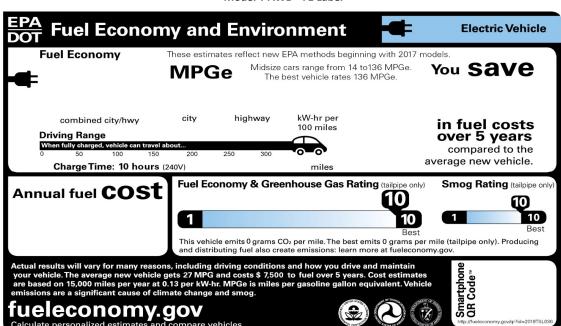

Model Y AWD - FE Label

#### 07.04 Projected sales information (Confidential)

#### **08:00 GENERAL TECHNICAL DESCRIPTION**

#### 08.01 DESCRIPTION OF PROPULSION SYSTEM

The propulsion system consists of two drive units and a high voltage battery pack. Each drive unit contains an inverter, an electric traction motor, a fixed-ratio gearbox, and a differential.

#### 8.02 DESCRIPTION OF MOTOR(s)

The front motor is a 3-Phase AC induction motor utilizing a squirrel cage 4 pole, variable frequency drive to control the motor. The rear motor is a 3-phase AC internal permanent magnet motor utilizing a six-pole, high-frequency design with inverter-controlled magnetic flux

#### **8.03 DESCRIPTION OF BATTERIES**

The battery packs used in the Tesla Model Y is one of the most technically advanced lithium-ion battery packs in the world. Using customized automotive grade lithium-ion cells, the Tesla battery achieves unmatched energy density and enables the long range capability of the vehicle. The low-profile flat packaging enables an efficient and functional occupant area. The battery has replaceable active short circuit protection that is accessible with the battery in the vehicle via an access panel. A set of switches inside the pack disconnect high voltage from the positive and negative terminals on the battery pack when not in use. To disable the switches from closing during vehicle service, the 12V power feed can be disconnected at the low voltage wiring connector into the battery pack. The battery control system consists of the Battery Monitoring System (BMS) which controls the switches, measures pack current and voltages, electrical isolation of the battery from chassis ground and monitors cell voltages and module temperatures from the Battery Monitor Boards (BMBs) installed on each of the modules. The battery is rated at 400V and is capable of delivering in excess of 1000 Amperes. The battery mass is less than 500 kg.

#### 08.03.01 Battery charging capacity

The fully charged battery contains a minimum amount of usable energy when new, based on the battery type/option fitted to the vehicle.

#### 08.03.02 Self-discharge information

The self-discharge rate of the High Voltage battery is likely to be less than 0.5% per month.

#### 08.03.03 Description of thermal management system

The Tesla battery pack contains an integrated cooling system to ensure that the individual cells are maintained at, or close to, their optimum operating temperature. Incorporated in the vehicle system is an inline heating element to raise and a chiller to lower the pack temperature, when required.

## 08.03.04 Definition of end-of-life

The battery pack end-of-life shall be determined by Tesla's local service centers with Proper inspection and test methods.

#### 08.03.05 Description of battery disposal plan

Tesla's lithium ion battery packs do not contain heavy metals such as lead, Cadmium, or mercury. They are exempt from hazardous waste disposal standards in the USA under the Universal Waste Regulations. However, they do contain recyclable materials, and Tesla plans to recycle all battery packs removed from vehicles.

Tesla highly recommends that all battery packs be taken to local Tesla service facilities and recycled by Tesla or Tesla authorized agencies, so that the battery packs can be recycled in a safe and efficient manner.

If disposing independently, without return to Tesla, then the owner must assume responsibility for recycling in a safe and legal manner. If an owner does assume this responsibility, Tesla recommends consulting with the appropriate local, state or federal authorities to determine the appropriate methods for disposal and recycling. Keep in mind that disposal regulations may vary dependent on location.

For more information on the recycling of Tesla custom battery packs, please call Tesla Customer Service at 1-877-79TESLA (1-877-798-3752).

#### **08.04 DESCRIPTION OF CONTROLLER / INVERTER**

The drive inverter performs several critical functions in the Tesla Model Y including torque control, power and torque limit enforcement, and status monitoring. The drive inverter is an integral part of the drive unit.

#### **08.05 DESCRIPTION OF TRANSMISSION**

The transmission is a fixed ratio, mechanical, transversely mounted gearbox with integral final drive (transaxle configuration).

The shift lever is mounted to the steering column. The lever has five detents—that can select Reverse, Neutral, Drive, Cruise and Autopilot (if equipped). Selecting either forward or reverse position enables drive current to the motor to generate the appropriate torque. There is no physical reverse gear needed.

In addition, the lever has a park button which is used to operate the electrically-actuated park brake.

#### **Transmission Shift lever - Steering column**



# 8.06 DESCRIPTION OF CLIMATE CONTROL SYSTEM General Specifications:

The Model Y climate control is a Single Zone system with Automatic Temperature control. The modes include Defrost, Panel and Floor (or any combination of these three). The system consists of two panel vents, two front row floor vents, defroster vent, second row floor vents, second row console vents with positive air shut off and turning vane manual control.

#### 08.06.01 Electric cabin heater

The heater unit incorporating a variable speed electric fan is located in the front of the chassis tub with ducting directing the blown air to defrosting, face level and floor level vents in the passenger compartment.

The heater element is of the heat pump, drawing HV electrical energy from the battery pack High Voltage.

Tesla Model Y's heat pump reduces the energy required by the HVAC system in both heating and cooling scenarios. The energy required to heat the cabin varies by weather and occupant comfort needs, but on-average consumes approximately 10% of the total energy available for driving. However, even moderately cold weather (0°C), consumption can increase to 25% or more. A heat pump consumes a small amount of electrical energy to thermodynamically "upgrade" low-temperature (less useful) thermal energy to higher-temperature (more useful) thermal energy, making it suitable for occupant comfort. That is, for a given electrical power input, a heat pump will return 1 to 5x in useful heating power; an electrical cabin heater provides 1:1 in heating power, and therefore is far less efficient.

Typically, this is accomplished using conventional refrigeration system components, e.g., compressors, valves, heat exchangers and so on, configured or connected together in a specific way. Tesla's heat pump uses conventional components with unconventional flexibility or cycle configuration. A heat pump must generally have a low-temperature source from which to draw energy. Tesla's system enables the heat pump source to be either the power-train coolant loop, e.g., low-temperature waste heat produced naturally by the vehicle while driving, ambient air, the battery thermal mass, the cabin thermal mass, or combinations thereof. Another advantage of this architecture is the ability to reject heat into the battery pack via a liquid-cooled condenser for a limited amount of time during cabin cooling scenarios when the temperature of the battery is modest. Therefore, for most startups with AC on, the relatively cool, well-coupled, large thermal mass serves to lower discharge pressure and therefore reduces compressor input power relative to a conventional air-cooled condenser setup.

Modern automotive heat pump systems using an HFC/HFO refrigerant suffer from low heating capacity in extremely cold ambient conditions, e.g., minus 10°C and below. Therefore, these conventional systems retain an expensive high-voltage cabin heater to cover heating deficits whenever the heat pump capacity is insufficient. Tesla's heat pump system also provides ways to remove a cabin air high voltage PTC heater completely by using the compressor as an electrical heater in specific scenarios. In fact, the electrical power draw capability of the compressor significantly exceeds a typical HV cabin PTC heater capability. This last point is accomplished via Tesla's unique architecture – the cycle is configured in such a way to provide a controlled environment for the compressor, regardless of ambient conditions, and ultimately unlocks the full electrical input power. Therefore, Tesla's thermal system can sometimes operate like a heat pump (heat efficiently) and sometimes like an electrical heater when heat pump capacity is not sufficient for comfort – using the same compressor.

#### 08.06.02 Fuel-fired heater

Not applicable

#### 08.06.03 Air conditioning

The Model Y air conditioner system is an R134a refrigerant consists of a high voltage electric scroll type with integrated inverter with High Voltage Interlock Loop. The compressor Oil is Poly Olefin Ester oil that is non-conducting.

#### 08.06.04 Climate control system logic

Vehicle Controller printed circuit boards activate actuators and responds to evaporator air outlet temperature sensor, heat pump condenser outlet temperature sensor and air duct temperature sensors, as well as user demands from center display.

# **08.06.05** Tamper resistance of climate control system that includes a fuel-fired heater Not applicable

#### **08.07 DESCRIPTION OF REGENERATIVE BRAKING SYSTEM**

Regenerative braking (RGB) occurs when the driver lifts his foot from the accelerator pedal while the vehicle is moving; the experience is analogous to engine braking on a gasoline-powered car with a conventional manual transmission. The friction braking system is independent of RGB.

The amount of RGB torque generated depends on the accelerator pedal position — largest when the accelerator pedal is fully released, decreasing as the pedal is depressed, reaching zero torque when the pedal reaches its neutral torque position (a position that is a function of vehicle speed). The max RGB deceleration also varies depending on vehicle speed. The maximum RGB profile is defined as a target total deceleration rate as a function of vehicle speed. The max RGB profile is tailored to everyday driving conditions, which typically exhibit higher deceleration rates at lower speeds.

When the battery pack is near maximum capacity, regenerative braking function will be limited to ensure the maximum capacity of the battery is not exceeded. Any RGB limiting will be ramped in gradually to allow the driver to adapt to the changing RGB performance. When the battery pack is below 0 degrees, RGB will not be allowed because the batteries are not rated to accept charge below this temperature. Any RGB limiting will be ramped in gradually to allow the driver to adapt to the changing RGB performance. The vehicle notifies the driver of any limits on the regenerative braking function.

#### 08.08 DESCRIPTION OF VEHICLE ELECTRICAL SUPPLY EQUIPMENT (CHARGER)

The Tesla Model Y is capable of accepting energy either from a permanent facility installed at the owners location or from many readily available power outlets when 'on the road'.

**Optional** - The dedicated High Power Connector (HPC) can be purchased separately from the vehicle and a certified electrician will confirm the capabilities of the residential supply circuit at the vehicle owner's location. Confirmation of a satisfactory residential electrical Supply will lead to the installation of a hard-wired HPC unit, this will expedite vehicle charging at the most efficient rate. The HPC can supply available current up to a maximum of 80 amps and incorporates electronic systems that communicate with the vehicle control systems to indicate the maximum available current so that the vehicle can determine the amount and rate of charge required. But the current standard on-board charger is limited to 48A. So the charging duration is 8.5 hrs. at the rate of 48 Amps.

Standard - Charging at rates lower than or equal to 32A can also be achieved via a mobile connector. The universal mobile connector is included as standard in the purchase of every Model Y and is an individual cable that connects the vehicle to any available domestic power outlet and can deliver current to a maximum of 32 Amps. The Mobile Connector incorporates similar electronic circuitry as the HPC to communicate with the vehicle and manage the charging process. The charging duration is 12 hrs. at the rate of 32 Amps.

The vehicle is also capable of accepting DC current up to 525A from an off-board charger (Supercharger).

#### 08.08.01 Proper recharging procedures

The charging system adjusts automatically to the available AC line voltage, frequency and current, within limits. The charging system in the vehicle works in conjunction with either of the three external charging stations; the permanently installed HPC, the permanently installed supercharger or the portable Mobile Connector.

Anytime the EV Inlet door is opened, the vehicle will prepare to enter CHARGE state. Once the user connects either supply cable to the vehicle, the charging system signals to the vehicle that it is ready to deliver the charge. The vehicle locks the cable onto the vehicle and then indicates that it is ready to accept energy and charging will commence. Failure of any of these steps will result in fault condition and lack of **full charging capability**. Vehicle could still charge on low power if handle lock is not engaged.

#### Prepare to charge state



**Low Power Charging Indication** 



**High Power Charging Indication** 



If the battery temperature is near or below freezing temperatures, normal charging will not occur. The vehicle will identify this condition and will begin heating the battery coolant and circulating the coolant to raise the battery temperature to enable charge. When the pack temperature rises to a temperature within the allowable charging range, heating will reduce or stop and charging will commence.

## 08.08.02 Power requirements necessary to recharge vehicle

Model Y comes with one on-board charger is capable of a maximum of 48A on 208V or 240V outlets and 12A on 120V outlets.

#### 08.10 OTHER UNIQUE FEATURES (i.e. solar panels)

Not applicable; vehicle is not equipped with any such features.

#### 08.11 DESCRIPTION OF WARNING SYSTEM(S) FOR MAINTENANCE / MALFUNCTION

The Tesla Model Y is equipped with a tell-tale lamp located in the instrument pack to indicate any malfunctions through user alerts e.g. "battery failure" with battery symbol.

The tell-tale is complemented by more detailed information exhibited on the Center Display. An additional driver aid which indicates the nature of the malfunction as well as a wide range of additional vehicle data, such as when maintenance is needed.

### 08.11.01 Cut-off terminal voltages for prevention of battery damage

The control electronics inside of the Drive Unit and Charger are programmed not to allow the unit to drive the voltage of the battery above or below hard voltage limits. If the battery pack is unable to achieve a desired response from these systems and the voltage reaches above or below a set limit, the two switches inside the battery pack will open, disabling the entire high voltage system in the car.

## **8.12 DESCTIPTION OF DYNO MODE**

Tesla, Inc. is currently completing the implementation of user interface (UI) features that enable access to our "Dyno Mode" for all users. This feature is required to be enabled to maintain representative driving controls while testing on a chassis dynamometer. Access to Dyno Mode was introduced at the start of production in October 2019, and deployed to the entire Tesla fleet in version 2019.40 over the month of October 2019.

In order to preserve the proper driving functionality and behavior, Dyno Mode executes the following features:

- Disable Stability Control to ensure no false interaction with the dyno.
- Disable Traction Control to ensure no false interaction with the dyno.
- Disable Active Drive Line Damping to avoid inducing oscillations in the dyno.
- Force the torque split to be as it would be under normal straight-line driving conditions
- Disable Brake Disk Wipe

When the Stability Control and Traction Control systems become faulted, as is the case on a dynamometer where driving is detected but movement is not, regenerative braking is disabled so that unintended braking torque does not lead to loss of traction or control on low friction surfaces. Disabling Stability Control and Traction Control prevents those systems from disrupting regenerative braking behavior, maintaining the most representative driving energy consumption.

Dyno Mode can be activated by the user, according to the following steps:

- 1. Vehicle must be in Park.
- 2. While holding down left (turn signal) stalk, press and hold the Tesla "T" logo at the top of the screen.
- 3. Enter the Dyno Mode activation password, "dynotest".

Dyno Mode can be deactivated by the user by pressing the "Power Off" button within the Safety & Security tab of the UI.

We are targeting completion of this Dyno Mode feature for installation in all new production vehicles by October 7th, 2019. Over the month of October, we will be rolling out this feature to our US fleet, enabling all Tesla vehicles to enter Dyno Mode.

#### **8.13 DESCTIPTION OF COASTDOWN MODE**

To engage Coastdown Mode:

- 1. Press and hold Tesla T to bring up Access Code prompt
- 2. Type "coastdown"

#### Vehicle Behavior:

UI will send out a binary signal in the message on the right bus. The thermal controller should consume this message and unconditionally close the louver and turn off the refrigerant system.

Display "COASTDOWN" in cluster where we display other mode info like "VALET" and "CHILL" Coastdown Mode will turn OFF after drive cycle is complete.

#### 8.14 DESCTIPTION OF ONE-PEDAL DRIVING MODE

Regenerative braking decelerates Model Y whenever you release the accelerator pedal when driving. You can choose what you want Model Y to do once the driving speed has been reduced to a very low speed (almost at a stop) and both the accelerator pedal and brake pedal are released. While in Park, touch Controls > Driving > Stopping Mode and choose from these options:

CREEP: When close to, or at, a complete stop, the motor continues to apply torque, moving Model Y slowly forward (in Drive)or backwards (in Reverse), similar to a conventional vehicle with an automatic transmission. In some situations, such as on a steep hill or driveway, you may need to press the accelerator pedal to continue moving or to prevent Model Y from moving in the opposite direction.

HOLD: Maximizes range and reduces brake wear by continuing to provide regenerative braking at speeds lower than with the Creep and Roll settings. When Model Y stops, the brakes are automatically applied without you having to put your foot on the brake pedal. Whether stopped on a flat surface or a hill, Vehicle Hold keeps the brake applied, provided your foot remains off the accelerator and brake pedals.

ROLL: When close to, or at, a complete stop, Model Y becomes free rolling like a vehicle in Neutral. Therefore, if stopped on a slope, Model Y will roll downward. The brake does not engage, and the motor does not apply torque (until theaccelerator pedal is pressed).

#### 09.00 RUNNING CHANGE VEHICLE DESCRIPTION

Refer to appendix 09.00, if applicable

#### 10.00 ROAD LOAD DATA

See Verify application

#### 11.00 STARTING AND SHIFTING SCHEDULES

#### 11.01 Starting

The Model Y does not have a traditional starter switch and instead has a smart entry system for greater safety and customer convenience. The smart entry system comprises of an authenticated phone (using Bluetooth Low Energy or internet connectivity) or key card (using Near Field Communication), a weight sensor embedded into the driver seat, and the brake pedal.

#### **ENTERING**

An authenticated phone can be used to passively unlock the car when connected, in range and a door handle is pulled or trunk release button is pressed.

The Tesla mobile app on an authenticated phone can be used to manually unlock the vehicle.

A key card can be used to unlock the car by scanning the card on the b-pillar.

After a successful key card scan on the b-pillar or center console:

- a. Vehicle is authorized to Drive within a reasonable time period. Time period is extended based on additional user interaction which include: driver opening their door, driver sitting down, driver closing their door while seated.
- b. If time period is exceeded, upon brake press, instruct driver to rescan key card on the center console to reauthorize Drive.
- c. Accessory Mode functions will be available without the user having to rescan their key card.

#### LOCKING

An authenticated phone can be used to passively lock the car when the phone is disconnected or moved away from the vehicle. This passive function can be disabled in controls on the touchscreen.

The Tesla mobile app on an authenticated phone can be used to manually lock the vehicle.

A key card can be used to lock the car by scanning the card on the b-pillar. There is no passive locking with key cards (car does not auto lock)

Note: Using a key card to lock/unlock will be equivalent to an active lock/unlock—i.e., clicking on the key fob to lock and double-clicking to unlock.

#### **STARTING**

If successful interaction between authenticated phone or the key card and vehicle controller occurs, the system deactivates the immobilizer. Immobilizer deactivation only happens after 2 conditions are met below. The vehicle then enters accessory mode analogous to a "ACC" position on a conventional IC engine. In this mode, low voltage (12V) is supplied to the vehicle allowing operation of the radio and other accessories connected to the accessory rail.

High Voltage (HV) necessary to enable vehicle propulsion is enabled only by the closing of the contactors, which can only be triggered when the following conditions are both satisfied,

- 1. Authenticated phone or key card is authorized and key code is validated AND
- 2. Brake pedal is depressed.

By requiring brake pedal activation, along with the appropriate key code, this system ensures the safety of vehicle occupants by not allowing self mobility of the vehicle without the driver providing proper control inputs (i.e., service brake activation) and appropriate driver authorization (i.e., presence of the key code). If either the service brake is not activated or the key code not present, the vehicle controller will not close the contactors and self-mobility is not possible.

If the brake pedal is depressed and the proper key code present, the drive rail will activate (immobilizer deactivates) and allows the vehicle to be shifted out of Park.

#### 11.02 SHIFTING

Not applicable – the vehicle has a single-speed transmission.

#### 12:00 -16:00 RESERVED

#### 17:00 CALIFORNIA REQUIREMENTS

#### 17:01 Statement of Compliance

#### 17.01.01 General Statement

The production vehicles which are subject to registration or sale in the State of California will be, in all material respects, substantially the same in construction as test vehicles which are certified by the California Air Research Board; and will meet all the applicable emissions standards which are promulgated by the California Air Research Board in accordance with Section 43101 of the Health and Safety Code.

Tesla attests that the vehicle emission control label complies with the label durability requirements of the "California Motor Vehicle Emission Control and Smog Index Label Specifications", Title 13, CCR, Section 1965.

#### 17.01.02 Drivability statement

This statement is no longer included in the California Exhaust Emission Standards and Test Procedures for 2001 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles (as of January 01 2006); as was the case in previous versions.

#### 17.02 Supplemental data and certification review sheets

See attached

# 17.03 Engineering evaluation of zero evaporative emissions under any and all operating conditions (for vehicles equipped with fuel-fired heater only)

Not applicable; vehicle is not equipped with fuel-fired heater.

### 17.04 Credits

#### 17.04.01 Description of multi-manufacturer arrangements

Not applicable; Tesla has no such agreements in place.

#### 17.04.02 Credit calculation

Tesla a manufacturer that produces only pure battery electric vehicles is not required to produce a percentage of annual production volume as ZEV's and therefore will earn such credit on all 2019 to 2020, inclusive, model year vehicles. This vehicle is a full function ZEV with a range depending on the battery pack option chosen by the customer. Based on the UDDS of range shown in the table below, all variants will be classified as a ZEV and in the 13 CCR 1962.2(d)(5)(A), this means 2019 to 2020, each vehicle will earn 4 credits per vehicle.

#### Variant

Model Y Performance AWD

UDDS Range (Miles) / Credits per vehicle 447.17 / 4

#### 17.05 VEHICLE SAFETY

### 17.05.01 All Information for safe operation of vehicle

Tesla will submit a copy of the finalized vehicle owner's handbook by separate letter when it becomes available.

#### 17.05.02 Information on safe handling of battery system

#### **HANDLING**

Do not short circuit, puncture, incinerate, crush, immerse, force discharge, or expose the battery pack to temperatures outside the specified maximum storage temperature range of -20°C to 60°C.

The battery pack has a nominal operating voltage of 400 VDC. The battery pack is sealed in a rigid metal case and its exterior is isolated from high voltage. Handling the battery pack is electrically safe provided the enclosure remains closed.

The battery pack contains hermetically sealed lithium ion cells that contain a number of chemicals and materials of construction. Risk of exposure to electrode materials and Liquid electrolyte will only occur in cases of mechanical or thermal abuse of the battery Pack.

#### **STORAGE**

Do not store the battery pack in a manner that allows terminals to short circuit. Do not place near heating equipment, nor expose to direct sunlight for long periods. The battery pack should only be stored in approved packaging and stacked no more than two (2) packages high. To maintain service life, the battery pack should be stored at a state of charge (SOC) of 15 to 50%.

#### **TRANSPORT**

Lithium ion batteries are regulated as Class 9 Miscellaneous dangerous goods (also known as "hazardous materials") pursuant to the International Civil Aviation Organization.

(ICAO) Technical Instructions for the Safe Transport of Dangerous Goods by Air, International Air Transport Association (IATA) Dangerous Goods Regulations, the International Maritime Dangerous Goods (IMDG) Code, European Agreements concerning the International Carriage of Dangerous Goods by Rail (RID) and Road (ADR), and applicable national regulations such as the USA's hazardous materials regulations (see 49 CFR 173.185). These regulations contain very specific packaging, labelling, marking, and documentation requirements. The regulations also require that individuals involved in the preparation of dangerous goods for transport be trained on how to properly package, label, mark and prepare shipping documents.

## 17.05.03 Description of emergency procedures

#### HIGH VOLTAGE EXPOSURE

If one of the Tesla products has been visibly damaged or its enclosure compromised, then practice appropriate high voltage preventative measures until the danger has been assessed (and dissipated if necessary).

#### FIREFIGHTING MEASURES

If a fire or explosion occurs when the battery pack is charging, shut off power to the charger. In case of burning lithium ion fires, flood the area with water. The water may not extinguish them, but will cool the adjacent batteries and control the spread of the fire. CO2, dry chemical and foam extinguishers are preferred for small fires, but also may not extinguish burning lithium ion batteries. Burning batteries will burn themselves out. Virtually all fires involving lithium ion batteries can be controlled with water. When water is used, however, hydrogen gas may be a by-product which can form an explosive

Mixture with air. LITH-X (powdered graphite) or copper powder fire extinguishers, sand, dry ground dolomite or soda ash may also be used. These materials act as smothering agents.

Damaged or opened cells or batteries can result in rapid heating (due to exothermic reaction of constituent materials) and the release of flammable vapors. Water (and other items listed above) disperses heat when applied in sufficient quantity to a fire. Extended heat exposure can lead to ignition of adjacent cells with a potential complete envelopment of the battery pack if not cooled. An extinguished lithium ion battery fire can re-ignite due to the exothermic reaction of constituent materials from broken or damaged cells. To avoid this, remove sources of ignition and cool the burned mass by flooding with (or immersing in) water. Fire-fighters should wear self-contained breathing apparatus. Cells or batteries may flame or leak potentially hazardous organic vapors if exposed to excessive heat, fire or over voltage conditions. These vapors include HF, oxides of carbon, aluminum, lithium, copper, and cobalt. Additionally, volatile phosphorus pentafluoride may form at temperatures above 230° Fahrenheit. Never cut into the sealed battery pack enclosure due to the high voltage and electrocution risks.

If a decision is made to fight a battery fire aggressively, then large amounts of water should be applied from a safe distance with the intent of flooding the battery pack enclosure as completely as possible. Alternatively, if a decision is made to fight a battery fire defensively, then the fire crew should pull back a safe distance and allow the battery to burn itself out. Fire crews may choose to utilize a water stream or fog pattern to protect exposures or control the path of smoke.

#### **FIRST AID MEASURES**

Under normal conditions of use, the constituent battery cells are hermetically sealed. Contents of an open (broken) constituent battery cell can cause skin irritation and/or chemical burns. If materials from a ruptured or otherwise damaged cell or battery contact skin, flush immediately with water and wash affected area with soap and water. For eye contact, flush with significant amounts of water for 15 minutes and see physician at once. Avoid inhaling any vented gases. If a chemical burn occurs or if irritation persists, seek medical assistance. Seek immediate medical assistance if an electrical shock or electrocution has occurred (or is suspected).

### 17.06 Description of fuel-fired heater / fuel tank evaporative system

Not applicable; vehicle is not equipped with fuel-fired heater.

## **18.00 FUEL ECONOMY DATASETS**

**Model Y - Performance AWD** 

(AER) Unadjusted, Miles

CD UDDS Test LTSL10062980

AC Recharge Energy, Wh 88849 (AER) Unadjusted, Miles 447.17

CO2 Composite Adjusted 0 g/mi (factors into 0 g/mi on FE label)

YD220-R00653

395.41

CD Highway Test LTSL10062981 AC Recharge Energy, Wh 88849

CO2 Composite Adjusted 0 g/mi (factors into 0 g/mi on FE label)

E.O.#: Page:

# 2020 MODEL-YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET

#### ZEV-PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM DUTY VEHICLES

#### **Model Y Performance AWD**

ManufacturerTesla, IncEngine FamilyLTSLV00.0L2YVehicle Class (es)Passenger Car

Number of ZEV Credits per vehicle

Fuel Type (s) Electro-Chemical Battery

Battery Type (s) Lithium Ion Total Battery Weight, Kg 480 Total Battery Volume, m3 0.400 150 Battery Specific Energy, Wh/Kg Number of Batteries or modules per vehicle 1 Total Battery Voltage, Nominal 350 On-Board Charger(s) Charger(s) Conductive Drive Motor (Front) **AC Induction** 

Drive Motor (Rear) Other (Specify) - AC Permanent Magnet

Number of Drive Motor (s) 2

Rated Motor Power, kW 147 (Front) / 211 (Rear)

Drive 4WD-FT
Regenerative Braking Yes
Regenerative Braking AW
Driver Controlled Regen Braking No
Coast Regen Braking Yes
Air Conditioning Yes
Fuel-Fired Heater No

Vehicle Models ( If coded, see attachments)

Model Y Performance AWD

Transmission Type: M5, A4 (if applicable) AV/1 GVWR, lbs 5301 Curb Weight, 33%, lbs 4416 Loaded Vehicle Weight 4716 4750 ETW or Test Weight, lbs -12.02 DPA / RLHP or Dyno Set Coefficient, a= , lbf DPA / RLHP or Dyno Set Coefficient, b= , lbf/mph 0.2892 DPA / RLHP or Dyno Set Coefficient, c= , lbf/mph^2 0.01206

Range Test Results

Vehicle ID YD220-R00653

Transmission AV/1 ETW 4750 RLHP 11.44

City Range, miles 447.17
System AC, Wh/mile 198.69
System DC, Wh/mile 179.02
Vehicle DC, Wh/mile 175.78

Highway Range, miles 395.4
System AC, Wh/mile 224.70
System DC, Wh/mile 202.46
Vehicle DC, Wh/mile 198.79

Battery Test Results - Specific Energy, wh/kg 150

Fuel-Fired Heater Emission Results, g/mile Not applicable

## 3.03 Vehicle Configuration and sub-configurations

Make	Tesla			
Carline	Model Y			
Type	Battery Electric Vehicle			
Test Group	LTSLV00.0L2Y			
Final Drive ratio	9.04			
Emission Control	NA (BEV)			
Exhaust	NA (BEV)			
Evap	NA (BEV)			
Model Type	Model Y Performance AWD			
Basic Engine code (F/R)	L2Y			
Transmission Type / Code	AV/1			
Vehicle ID tested	YD220-R00653			
Vehicle Configuration #	0			
Gross Vehicle Weight (lbs)	5301			
33% Curb Mass (lbs)	4416			
Loaded Vehicle Weight (lbs)	4716			
Equivalent Test Weight (lbs)	4750			
Wheel / Tire	255/45 R19 - 42psi			
Target Road Load A lbf	34.27			
B lbf/mph	0.3195			
C lbf/mph^2	0.0142			
Road Load HP @ 50mph	11.44			
Vehicle Configuration #	1			
Gross Vehicle Weight (lbs)	5301			
33% Curb Mass (lbs)	4416			
Loaded Vehicle Weight (lbs)	4716			
Equivalent Test Weight (lbs)	4750			
Wheel / Tire	255/40 R20 - 42psi			
Target Road Load A lbf	34.27			
B lbf/mph	0.2034			
C lbf/mph^2	0.0175			
Road Load HP @ 50mph	11.76			

Fuel Economy Data Vehicle (FEDV) Selection Justification – FEDV curb mass vehicle accounts for options that have a greater than 33% take rate and highest sold wheel/tire combination that collectively represents a vehicle configuration / sub configuration that has the largest sales volume within that Model Type. Tesla affirms that the road load power, and the target coefficients are those that are appropriate for the ETW of the vehicle.

# **EPA EV Multicycle Calculator (SAE J1634 Oct 2012)**

Manufacturer: Tesla Inc. As used by EPA laboratory

Carline: Model Y Performance AWD

Model Year 2020 D.Good March 8, 2016

Vehicle YD220-R00653

Test Number Comments:

LabTesla Lab - FremontTest Date12/30/2019

							Recharge	
Cycle	Energy (Wh)	Distance (mi)	ECdc_cyc	Kuwgt	Kwgt		AC WattHr	s
UDDS1	1408.00	7.463	188.66	47.16	3.38			88849
UDDS2	1330.90	7.449	178.68	44.67	58.49			
UDDS3	1297.90	7.457	174.05	43.51	56.98			
UDDS4	1295.10	7.448	173.90	43.47	56.93		RAF	
HWY1	2051.00	10.247	200.15	100.08				1.130
HWY2	2027.40	10.269	197.42	98.71				
SS1	65961.60	265.728	248.23					
SS2	3230.00	12.836	251.64					
TOTAL	78601.90	328.896						
K-Factors	UDDS1	UDDS2	UDDS3	UDDS4	HWY1	HWY2		
Unweighted	0.250	0.250	0.250	0.250	0.500	0.500		
Weighted	0.018	0.327	0.327	0.327	NA	NA		
							FDA vor	cion

Results	Range (mi)	AC Wh/mi		MPGe	kWh/100mi
UDDSu		439.55	202.13		
UDDSw		447.17	198.69	169.6331	19.8693
HWY		395.41	224.70	149.9993	22.4701

EPA version
kWh/100mi
19.86935
22.47010

## Note:

- 1. Fill in yellow shaded areas to compute range and AC wh/mi results
- 2. Weighted results based on SAE J1634 calculations
- 3. Final values in green shaded area should be rounded to appropriate significant digits

# **Certification Summary Information Report**

Lean Burn Strategy Indicator

Manufacturer	Tesla, Inc.	Manufacturer Code	TSL
Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family	
Certificate Number		CARB Executive Order #	
Certificate Issue Date		Certificate Revision Date	
Certificate Effective Date		Conditional Certificate	
CSI Revision #		CSI Submission/Revision Date	01/07/2020 08:19:04 PM
Model Year	2020		

**Basic Fuel Metering System** 

**Test Group Information** 

CSI Type Update for Correction **Running Change Reference Number** 

**GHG Exempt Status** Not Exempt

**Drive Sources and Fuel(s)** 

**Drive Source #1:** Electric Motor

Fuel

Electricity

Hybrid Indicator	No		
Multiple Fuel Storage		Rechargeable Energy Storage System Indicator	Yes
<b>Multiple Fuel Combustion</b>		Off-board Charge Capable Indicator	Yes
Fuel Cell Indicator	No	EPA Vehicle Class	LDV
Federal Clean Fuel Vehicle	Yes	Federal Clean Fuel Vehicle Standard	ZEV
Federal Clean Fuel Vehicle ILEV	Yes	California Partial Zero Emissions Vehicle Indicator	
<b>Durability Group Name</b>	LTSLEEVNNL2Y	<b>Durability Group Equivalency Factor</b>	1
Reduced Fee Test Group	No	Certification Region Code(s)	FA, CA
Complies with HD GHG 2b/3 regulations?	No		
<b>Introduction into Commerce Date</b>	12/20/2019	CAP2000 Conditional Certificate?	N/A
<b>Independent Commercial Importer?</b>		<b>Alternative Fuel Converter Certificate?</b>	
SFTP Federal Composite Compliance Identifier	Tier 3	SFTP Tier 2 Composite CO Option	
SFTP LEV-III Composite Compliance Indicator	Yes		

Indicator

**OBD** Compliance Type **CARB OBD Demonstration Vehicle Test Group** LTSLV00.0L2Y

**Test Group OBD Compliance Level Number of Test Group OBD Deficiencies** 0 Full - no deficiencies

**OBD Deficiencies Comments** Battery Electric Vehicle - No OBD requirements

**Mfr Test Group Comments** MY2020 certification of the Model Y AWD including 1 carline (Performance)

Mfr Exhaust / Evap Standards Comments

# **Certification Summary Information Report**

Test Group		I T	SLV00.0L2Y		Evaporative/Refueling	r Family				
<u> </u>	41 . 62 .440		3L V 00.0L2 I		Evaporative/Keruening	ş r anıny		<u></u>		
Models Covered by	y this Certifi	cate		G .101 .1 5 1						
Carline Manufacturer	Divisio	n	Carline	Certification Region Code(s)	Drive System	Trans - '	Гуре	- # of Gears	Trar	s - Lockup
			46 - Model Y							
Tesla, Inc.	1 - Tesla N	Iotors F	Performance AWD	Federal	All Wheel Drive	Autom	atic	1		No
Tesla, Inc.	1 - Tesla M	fotors F	46 - Model Y Performance AWD	California + CAA Section 177 states	All Wheel Drive	Autom	atic	1		No
Engine Description	1									
Hybrid Type					Hybrid Description					
Engine Type					Mfr Engine Description	on				
Engine Block Arranger	ment				Mfr Engine Block Arr	angement Desc	ription			
Camless Valvetrain Indicator Oil Viscosity/Classification										
Number of Cylinders/Rotors Mechanically Variable Compression Ratio Indicator										
After Treatment D	evice(s) (AT	<b>(D</b> )								
Mfr After Treatment l Comments	Device (ATD)									
Direct Ozone Reduction	on (DOR) Devid	re								
Mfr Emission Control										
Official Test Numb	oers									
Test Group Fuel	FTP	US06	SC03	Cold CO	Highway	EPA City Litmus Value	EPA City Litmus Threshold	EPA Highway Litmus Value	EPA Highway Litmus Threshold	CREE Weighting Factor
Electricity										
SFTP LEV-III Off	icial Test Nu	ımbers								
Test Group	Fuel		FTP		US06		SC03			
Electricit										
Official Charge De	pleting Test	Numbers								
Test Gi	oup Fuel		UD	DS		Highway				
	etricity		LTSL10		L	TSL10062981				

Date: 01/07/2020 08:19:16 PM

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family	
<b>Hybrid Electric Vehicle And Fuel Cel</b>	l Information		
Rechargable Energy Storage System	Battery(s)	Rechargable Energy Storage System, if Other	
Battery Type	Lithium Ion	Number of Battery Packs	1
<b>Total Voltage of Battery Packs</b>	350	Battery Energy Capacity	230
Battery Specific Energy	150	Battery Charger Type	On-Board
Number of Capacitors		Capacitor Rating (In Farads)	
Mfr Capacitor Comments			
<b>Hydraulic System Description</b>			
Regenerative Braking Type	Electrical Regen Brake		
Regenerative Braking Source	Both	Driver Controlled Regenerative Braking	No
Mfr Regenerative Braking Description			
Drive Motor(s)/Generator(s)	2		
Motor/Generator Type 1	AC Induction	Rated Motor/Generator Power	147
Motor/Generator Type 2	AC 3 PHASE PERMANENT MAGNET	Rated Motor/Generator Power	211
Mfr Fuel Cell Description			
Fuel Cell On-Board H2 Storage Capacity (kg)		Usable H2 Fill Capacity (kg)	
Mfr Hybrid Electric/ Electric Vehicle Comments	2020 MY Model Y AWD Carline; AWD & PER	F SHARE COMMON FRONT MOTOR - 147 kW; REAR	(AWD) - 188 kW; (PERF)-211 kW;

Test Group		LTSLV00	0.0L2Y		Evaporative/Ro	efueling Family	
Emission Data Ve	chicle Informa	tion					
Vehicle ID / Configur	ation	YD220-R	00653 / 0		Manufacturer	ration Number 0	
Original Test Group		LTSLV0				orative/Refueling	
Original Test Vehicle		2020	9.0E21		Original Evapo	Tues ver iteraeming	5 <b></b> .,
Vehicle Model	1110401 1041	2020					
Represented Test Veh	sielo Moko	Tesla			Represented To	el Model Y Performance AWD	
_		Testa			Representeu 10	Model 1 Terrormance AWD	
Leak Family Deta	ills						
Leak Family Identifie	er				Leak Family N		
Drive Sources and	d Fuel System	Details					
	Drive	Source and Fuel#		Dri	ve Source		Fuel
1			Elec	tric Motor		Electricity	
Hybrid Indicator		No					
Multiple Fuel Storage	<b>1</b>				Multiple Fuel (	Combustion	
Fuel Cell Indicator					System Indicator Yes		
Rechargeable Energy	Storage System	Battery(s	)				
Off-board charge Cap	= -			5,500, 12 0 101			
Odometer Correction		1			Odometer Cor	rection Factor	1
Odometer Correction		- = System	n Miles is equal to (	Fest odometer rea			ction factor
Odometer Correction	=	Miles	<b></b> (				
Engine Code		L2Y			Rated Horsepo	wer	283
Displacement (liters)		0.001			•		
Air Aspiration Metho	d		Aspirated		Air Aspiration	Method, if 'Othe	er'
Number of Air Aspira			1		<del>-</del>	Device Configura	
Charge Air Cooler Ty					Drive Mode W	=	All Wheel Drive
Shift Indicator Light	=	Not eqipp	oed		Aged Emission	_	4,000 (mi)
Curb Weight (lbs)	<u> </u>	4416			_	t Weight (pounds	
GVWR (lbs)		5301			N/V Ratio		108.4
Axle Ratio		9.04					
Transmission Type		Automati	c		# of Transmiss	ion Gears	1
Transmission Lockup	•	No			Creeper Gear		No
Dynamometer Co	efficients:						
		Target Coefficien	ts		Set Coefficients		
Coefficient Category	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	EPA Calculated Total Road Load Horse Power fo City/Highway/Evap Coefficients
City/Highway/Evap	34.27	0.3195	0.0142	-12.02	0.2892	0.0121	11.4
	J						

# **Certification Summary Information Report**

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family					
Emission Control Device Comments Manufacturer Test Vehicle Comments	No Emissions Control Device - Pure Electric Front Motor Power - 147 kW; Rear Motor Power - 211 kW; This is 2020 Model Y Performance AWD;						
Test #	LTSL10062982	Test Procedure	2 - CVS 75 and later (w/o can. load)				
Exhaust Test # for this Evap Test		Test Fuel Type	62 - Electricity				
Test Date	12/30/2019	Fuel	Electricity				
Fuel Batch ID		Fuel Calibration Number					
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned				
Verify Test Lab ID	Fremont Dyno						
E10 Evaporative Test Measurement Method							
Test Start Odometer Reading	1750	Odometer Units	M				
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage					
State of Charge Delta							
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes				

# **Test Results**

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	
DT-ASCR (Drive Trace Absolute Speed Change Rating)	2.2511	
DT-EER (Drive Trace Energy Economy Rating)	2.1094	
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	4.1435	
MFR FE (Manufacturer Fuel Economy)	17.5778	191.7191002
NOX (Nitrogen Oxide)	0	
NMOG (Non-methane organic gases)	0	

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0

**Manufacturer Test Comments** 

Internal Test results (CVS-75 UDDS Ambient) for MY2020 Model Y Performance AWD. AC wh/mi @ 50 % SOC - Bag 1 - 193.5248; Bag 2-164.6782; Bag 3 - 189.6339; Bag 4 - 163.1605;

Certification				Rounded		NMOG/NM	Diesel Adjustment			Certification		
Region	<b>Useful Life</b>	Standard Level	<b>Emission Name</b>	Result	RAF	HC Ratio	Factor	Add DF	Mult DF	Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	СО	0.0				0	-1	0	0	Pass
CA	150,000 miles	California ZEV	CO	0.0				0		0	0	Pass

# **Certification Summary Information Report**

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family	
Test #	LTSL10062983	Test Procedure	3 - HWFE
Exhaust Test # for this Evap Test		Test Fuel Type	62 - Electricity
Test Date	12/30/2019	Fuel	N/A
Fuel Batch ID		Fuel Calibration Number	
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Fremont Dyno		
E10 Evaporative Test Measurement Method			
Test Start Odometer Reading	1750	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	
State of Charge Delta			
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
/D / D 1/			

## **Test Results**

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
DT-ASCR (Drive Trace Absolute Speed Change Rating)	9.3658	
DT-EER (Drive Trace Energy Economy Rating)	2.0221	
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	11.6187	
MFR FE (Manufacturer Fuel Economy)	19.3169	174.4586347
NOX (Nitrogen Oxide)	0	
NMOG (Non-methane organic gases)	0	

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE	
Carbon-Related Exhaust Emissions	0	0	

**Manufacturer Test Comments** 

Internal Test results (HWY 3) for MY2020 Model Y Performance AWD. The HFET result from the full discharge MCT is used for the 2-part and 5-part calculations. AC wh/mi - 193.1692;

# **Certification Summary Information Report**

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family	
Test #	LTSL10062985	Test Procedure	90 - US06
Exhaust Test # for this Evap Test		Test Fuel Type	62 - Electricity
Test Date	12/30/2019	Fuel	N/A
Fuel Batch ID		Fuel Calibration Number	
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Fremont Dyno		
E10 Evaporative Test Measurement Method			
Test Start Odometer Reading	1750	<b>Odometer Units</b>	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	
State of Charge Delta			
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
T4 D14			

#### **Test Results**

Test Result Name	<b>Unrounded Test Result</b>	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	
DT-ASCR (Drive Trace Absolute Speed Change Rating)	-0.5785	
DT-EER (Drive Trace Energy Economy Rating)	0.7889	
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	0.9471	
MFR FE (Manufacturer Fuel Economy)	26.7513	125.9751863
NOX (Nitrogen Oxide)	0	
NMOG (Non-methane organic gases)	0	

**Manufacturer Test Comments** 

Internal Test results (US 06) for MY2020 Model Y Performance AWD. US 06 AC wh/mi @ 50% SOC - City:267.513; Hwy:256.8117.

# Date: 01/07/2020 08:19:16 PM Certification Summary Information Report

Test Group	LTSLV00.0L2Y	<b>Evaporative/Refueling Family</b>	
Test #	LTSL10062986	<b>Test Procedure</b>	95 - SC03
Exhaust Test # for this Evap Test		Test Fuel Type	62 - Electricity
Test Date	12/30/2019	Fuel	N/A
Fuel Batch ID		<b>Fuel Calibration Number</b>	
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Fremont Dyno		
E10 Evaporative Test Measurement Method			
Test Start Odometer Reading	1750	<b>Odometer Units</b>	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	
State of Charge Delta			
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
T4 D14			

#### **Test Results**

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.9706	
DT-EER (Drive Trace Energy Economy Rating)	1.6369	
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	2.1011	
MFR FE (Manufacturer Fuel Economy)	21.12	159.5643939
NOX (Nitrogen Oxide)	0	
NMOG (Non-methane organic gases)	0	

Manufacturer Test Comments Internal Test results (SC 03) for MY2020 Model Y Performance AWD. AC wh/mi - 211.2 at 50% SOC.

# **Certification Summary Information Report**

Test Group	LTSLV00.0L2Y	<b>Evaporative/Refueling Family</b>	
Test #	LTSL10062980	<b>Test Procedure</b>	81 - Charge Depleting UDDS
Exhaust Test # for this Evap Test		Test Fuel Type	62 - Electricity
Test Date	12/30/2019	Fuel	Electricity
Fuel Batch ID		Fuel Calibration Number	
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Fremont Dyno		
E10 Evaporative Test Measurement Method			
<b>Test Start Odometer Reading</b>	1750	<b>Odometer Units</b>	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	
State of Charge Delta			
<b>Drive Cycle Speed Tolerance Criteria</b>	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV TEST INFO			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	88.849
Charge Depleting Range (Calculated miles)	447	<b>Charge Depleting Range (Actual miles)</b>	447
<b>Equivalent All Electric Range (miles)</b>	447		
Number of Charge Depleting Bags/Phases Conducted	4		

# **Charge Depleting Bag/Phase**

Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result
1	Actual Distance Driven (miles)	447
2	Average System Voltage	332
3	Carbon Monoxide	0
4	Carbon dioxide	0
5	Carbon-Related Exhaust Emissions	0
6	Drive Trace Absolute Speed Change Rating	1.3249
7	Drive Trace Energy Economy Rating	1.6391
8	Drive Trace Inertia Work Ratio Rating	2.3797
9	Integrated Amp-hours	237
10	Manufacturer Fuel Economy	169.63
11	Nitrogen Oxide	0
12	Non-methane organic gases	0
13	Non-methane organic gases plus Nitrogen Oxides	999.999
14	Particulate Matter	0
15	System End State of Charge Watt-hours	78.602
16	System Start State of Charge Watt-hours	0

# **Certification Summary Information Report**

Test Group	LTSLV00.0L2Y	<b>Evaporative/Refueling Family</b>	
Manufacturer Test Comments	Internal Test results for MY202	20 Model Y Performance AWD. Range determined by using SAE	J1634 Multi-cycle test procedure. END-SOC 78602

wh (system gave error limited to 4 digits). MCT dc wh/mi is attached with EPA application. Added NMOG Test results.

							Diesel					
Certification				Rounded		NMOG/NM	Adjustment			Certification		
Region	Useful Life	Standard Level	<b>Emission Name</b>	Result	RAF	HC Ratio	Factor	Add DF	Mult DF	Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	СО	0.0				0		0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0				0		0		
CA	150,000 miles	California ZEV	CO	0.0				0		0	0	Pass
CA	150,000 miles	California ZEV	CREE	0				0		0		

# **Certification Summary Information Report**

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family	
Test #	LTSL10062981	Test Procedure	84 - Charge Depleting Highway
Exhaust Test # for this Evap Test		Test Fuel Type	62 - Electricity
Test Date	12/30/2019	Fuel	Electricity
Fuel Batch ID		Fuel Calibration Number	
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Fremont Dyno		
E10 Evaporative Test Measurement Method	<del></del>		
Test Start Odometer Reading	1750	<b>Odometer Units</b>	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	
State of Charge Delta		-	
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV TEST INFO			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	88.849
Charge Depleting Range (Calculated miles)	395	Charge Depleting Range (Actual miles)	395
Equivalent All Electric Range (miles)	395		
Number of Charge Depleting Bags/Phases Conducted	2		
Charge Depleting Bag/Phase			

# Charge Depleting Bag/Phase

Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result
1	Actual Distance Driven (miles)	395
2	Average System Voltage	332
3	Carbon Monoxide	0
4	Carbon dioxide	0
5	Carbon-Related Exhaust Emissions	0
6	Drive Trace Absolute Speed Change Rating	4.957
7	Drive Trace Energy Economy Rating	1.081
8	Drive Trace Inertia Work Ratio Rating	6.2621
9	Integrated Amp-hours	237
10	Manufacturer Fuel Economy	150
11	Nitrogen Oxide	0
12	Non-methane organic gases	0
13	Non-methane organic gases plus Nitrogen Oxides	999.999
14	Particulate Matter	0
15	System End State of Charge Watt-hours	78.602
16	System Start State of Charge Watt-hours	0

# **Certification Summary Information Report**

<b>Test Group</b>	LTSLV00.0L2Y	Evaporative/Refueling Family	
Manufacturer Test Commen		20 Model Y Performance AWD. Range determined by using SA	AE J1634 Multi-cycle test procedure. END-SOC -

							Diesel					
Certification				Rounded		NMOG/NM	Adjustment			Certification		
Region	Useful Life	Standard Level	<b>Emission Name</b>	Result	RAF	HC Ratio	Factor	Add DF	Mult DF	Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	СО	0.0				0		0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	1			0		0		
CA	150,000 miles	California ZEV	CO	0.0				0		0	0	Pass
CA	150.000 miles	California ZEV	CREE	0				0		0		

# **Certification Summary Information Report**

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family	
Test #	LTSL10062984	<b>Test Procedure</b>	86 - Charge Depleting 20 Degree F FTP
Exhaust Test # for this Evap Test		Test Fuel Type	62 - Electricity
Test Date	12/30/2019	Fuel	N/A
Fuel Batch ID		Fuel Calibration Number	
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Fremont Dyno		
E10 Evaporative Test Measurement Method			
Test Start Odometer Reading	1750	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	
State of Charge Delta			
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV TEST INFO			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	80.735
Charge Depleting Range (Calculated miles)	267.45	<b>Charge Depleting Range (Actual miles)</b>	267.45
Equivalent All Electric Range (miles)	267.45		
Number of Charge Depleting Bags/Phases Conducted	36		
Charge Depleting Bag/Phase			

Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result
1	Actual Distance Driven (miles)	267.45
2	Average System Voltage	348
3	Carbon Monoxide	0
4	Carbon dioxide	0
5	Carbon-Related Exhaust Emissions	0
6	Drive Trace Absolute Speed Change Rating	-0.1164
7	Drive Trace Energy Economy Rating	0.0774
8	Drive Trace Inertia Work Ratio Rating	0.0854
9	Integrated Amp-hours	205
10	Manufacturer Fuel Economy	26.7054
11	Nitrogen Oxide	0
12	Non-methane organic gases	0
13	Non-methane organic gases plus Nitrogen Oxides	999.999
14	Particulate Matter	0
15	System End State of Charge Watt-hours	71.424
16	System Start State of Charge Watt-hours	0

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family
Manufacturer Test Comments	discharge. AC wh/mi - Bag 1 after the full cold discharge te	DS) for MY2020 Model Y Performance AWD. END SOC is 71424 wh (System error limited to 4 digits) for full - 431.2648; Bag 2 - 412.1029; Bag 3 - 380.039; Bag - 4- 376.7214; Tesla did not use external current measurement st, since AC energy is not used in any part of the 5-cycle consumption calculation. The stated recharge energy is an from the cold discharge test and the round trip energy efficiency from the full discharge MCT.
<b>Fuel Properties</b>		

Date: 01/07/2020 08:19:16 PM

Test Group	LTSI	LV00.0L2Y		Evapora	tive/Refueling Fam	nily			
			Consolida	ted List of Sta	andards				
Exhaust Standar	rds								
Cert Region	Fede	ral		Cert/In-U	Use Code		Cer	t	
Vehicle Class	LDV	/Passenger Car		Standard	l Level		Fed	eral Tier 3 Bin 0	
Fuel		ricity		Test Pro	cedure		Cha	rge Depleting UD	DS
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO							0	0
150,000 miles	CO-COMP							0	0
150,000 miles	CREE							0	0
150,000 miles	NMOG+NOX-COMP							0	0
Cert Region Vehicle Class Fuel	LDV	ornia + CAA Section /Passenger Car ricity	n 177 states	Cert/In-U Standard Test Prod	l Level			t ifornia ZEV irge Depleting Hig	hway
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	СО							0	0
150,000 miles	CO-COMP							0	0
150,000 miles	CREE							0	0
150,000 miles	NMOG+NOX-COMP							0	0
Cert Region Vehicle Class Fuel		ral /Passenger Car ricity		Cert/In-U Standard Test Prod	l Level			t eral Tier 3 Bin 0 rge Depleting Hig	hway
		Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
Useful Life	Emission Name	Kesuit		1					0
Useful Life 150,000 miles	Emission Name CO							0	U
								0	0
150,000 miles	СО								

# **Certification Summary Information Report**

Test Group	LTS	LV00.0L2Y		Evapora	tive/Refueling Fam	nily					
Cert Region	Fede	Federal			Cert/In-Use Code			Cert			
Vehicle Class	LDV	//Passenger Car		Standard	l Level		Fed	eral Tier 3 Bin 0			
Fuel	Elec	tricity		Test Pro	cedure		CV	S 75 and later (w/	o can. load)		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std		
150,000 miles	СО							0	0		
Cert Region Vehicle Class Fuel	LDV	fornia + CAA Section //Passenger Car tricity	n 177 states	Cert/In-V Standard Test Prod	l Level			t ifornia ZEV S 75 and later (w/	o can. load)		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std		
150,000 miles	CO							0	0		
Cert Region Vehicle Class	LDV	fornia + CAA Section//Passenger Car	n 177 states	Cert/In-V	l Level			ifornia ZEV			
Fuel	Elec	tricity		Test Pro	cedure		Cha	arge Depleting UD	DDS		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std		
150,000 miles	CO							0	0		
150,000 miles	CO-COMP							0	0		
150,000 miles	CREE							0	0		
150,000 IIIICS											

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family					
	Gl	Blossary					
Useful Life							
4	4,000 miles	120	120,000 miles				
50	50,000 miles	150	150,000 miles				
100	100,000 miles						
Emission Name							
HC-TOTAL	Total Hydrocarbon	METHANOL	CH3OH - Methanol				
CO	Carbon Monoxide	N2O	Nitrous Oxide				
CO2	Carbon dioxide	SPITBACK	Spitback Hydrocarbon in grams				
CREE	Carbon-Related Exhaust Emissions	AMP-HRS	Integrated Amp-hours				
OPT-CREE	Optional Carbon-Related Exhaust Emissions	START-SOC	System Start State of Charge Watt-hours				
NOX	Nitrogen Oxide	END-SOC	System End State of Charge Watt-hours				
PM	Particulate Matter	ACT-DISTANCE	Actual Distance Driven (miles)				
PM-COMP	SFTP Composite Particulate Matter	AS-VOLT	Average System Voltage				
HC-NM	Non-methane Hydrocarbon	CO2 BAG 1	Bag 1 Carbon Dioxide				
OMHCE	Organic material Hydrocarbon Equivalent	CO2 BAG 2	Bag 2 Carbon Dioxide				
OMNMHCE	Organic material non-methane HC equivalent	CO2 BAG 3	Bag 3 Carbon Dioxide				
NMOG	Non-methane organic gases	CO2 BAG 4	Bag 4 Carbon Dioxide				
НСНО	Formaldehyde	NMOG+NOX	Non-methane organic gases plus Nitrogen Oxides				
Н3С2НО	Acetaldehyde	NMOG+NOX-COMP	SFTP Composite Non-methane Organic Gases + Nitrogen Oxides				
HC-NM+NOX	SFTP Non-methane Hydrocarbon + Nitrogen Oxides for US06 or SC03	DT-IWRR	Drive Trace Inertia Work Ratio Rating				
HC-NM+NOX-COMP	SFTP Composite Non-methane Hydrocarbon + Nitrogen Oxides	DT-ASCR	Drive Trace Absolute Speed Change Rating				
CO-COMP	SFTP Composite Carbon Monoxide	DT-EER	Drive Trace Energy Economy Rating				
ETHANOL	C2H5OH - Ethanol	COMB-CREE	Combined Carbon-Related Exhaust Emissions				
FE BAG 1	Bag 1 Fuel Economy	COMB-OPT-CREE	Combined Optional Carbon-Related Exhaust Emissions				
FE BAG 2	Bag 2 Fuel Economy	HC-TOTAL-EQUIV	Total Hydrocarbon equivalent - Evap only				
FE BAG 3	Bag 3 Fuel Economy	METHANE-COMB	Combined CH4 for HD 2b/3 vehicles only				
FE BAG 4	Bag 4 Fuel Economy	N2O-COMB	Combined Nitrous Oxide for HD 2b/3 vehicles only				
MFR FE	Manufacturer Fuel Economy	LEAK-DIA	Effective Leak Diameter (inches)				
НС	Hydrocarbon for Running Loss and ORVR	LEAK-GAS CAP	Gas Cap Leakage (cc/min)				
METHANE	CH4 - Methane	CO2-COMB	Combined Carbon Dioxide for HD 2b/3 Vehicles Only				
Certification Region							
CA	California + CAA Section 177 states	FA	Federal				
Exhaust Emission Star	ndard Level						
B1	Federal Tier 2 Bin 1	L3ULEV340	California LEV-III ULEV340				
B2	Federal Tier 2 Bin 2	L3ULEV250	California LEV-III ULEV250				
В3	Federal Tier 2 Bin 3	L3ULEV200	California LEV-III ULEV200				
B4	Federal Tier 2 Bin 4	L3SULEV170	California LEV-III SULEV170				
B5	Federal Tier 2 Bin 5	L3SULEV150	California LEV-III SULEV150				

Page 17 of 19 CSI Submission/Revision Date: 01/07/2020 08:19:04 PM

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family	
B6	Federal Tier 2 Bin 6	L3LEV630	California LEV-III LEV630
В7	Federal Tier 2 Bin 7	L3ULEV570	California LEV-III ULEV570
B8	Federal Tier 2 Bin 8	L3ULEV400	California LEV-III ULEV400
B9	Federal Tier 2 Bin 9	L3ULEV270	California LEV-III ULEV270
B10	Federal Tier 2 Bin 10	L3SULEV230	California LEV-III SULEV230
B11	Federal Tier 2 Bin 11	L3SULEV200	California LEV-III SULEV200
HDV1	HDV1 (Federal HD chassis Class 2b GVW 8501-10000)	T3B160	Federal Tier 3 Bin 160
HDV2	HDV2 (Federal HD chassis Class 3 GVW 10001-14000)	T3B125	Federal Tier 3 Bin 125
L2	California LEV-II LEV	T3B110	Federal Tier 3 Transitional Bin 110
L2OP	California LEV-II LEV Optional	T3B85	Federal Tier 3 Transitional Bin 85
U2	California LEV-II ULEV	T3SULEV30	Federal Tier 3 Transitional LEV-II SULEV30 Carryover
S2	California LEV-II SULEV	T3B70	Federal Tier 3 Bin 70
ZEV	California ZEV	T3B50	Federal Tier 3 Bin 50
OT	Other	T3B30	Federal Tier 3 Bin 30
T1	Federal Tier 1	T3B20	Federal Tier 3 Bin 20
PZEV	California PZEV	T3B0	Federal Tier 3 Bin 0
L2LEV160	California LEV-II LEV160	HDV2B395	Federal Tier 3 HD Class 2b Transitional Bin 395
L2ULEV125	California LEV-II ULEV125	HDV2B340	Federal Tier 3 HD Class 2b Transitional Bin 340
L2SULEV30	California LEV-II SULEV30	HDV2B250	Federal Tier 3 HD Class 2b Bin 250
L2LEV395	California LEV-II LEV395	HDV2B200	Federal Tier 3 HD Class 2b Bin 200
L2ULEV340	California LEV-II ULEV340	HDV2B170	Federal Tier 3 HD Class 2b Bin 170
L2LEV630	California LEV-II LEV630	HDV2B150	Federal Tier 3 HD Class 2b Bin 150
L2ULEV570	California LEV-II ULEV570	HDV2B0	Federal Tier 3 HD Class 2b Bin 0
L3LEV160	California LEV-III LEV160	HDV3B630	Federal Tier 3 HD Class 3 Transitional Bin 630
L3ULEV125	California LEV-III ULEV125	HDV3B570	Federal Tier 3 HD Class 3 Transitional Bin 570
L3ULEV70	California LEV-III ULEV70	HDV3B400	Federal Tier 3 HD Class 3 Bin 400
L3ULEV50	California LEV-III ULEV50	HDV3B270	Federal Tier 3 HD Class 3 Bin 270
L3SULEV30	California LEV-III SULEV30	HDV3B230	Federal Tier 3 HD Class 3 Bin 230
L3SULEV20	California LEV-III SULEV20	HDV3B200	Federal Tier 3 HD Class 3 Bin 200
L3LEV395	California LEV-III LEV395	HDV3B0	Federal Tier 3 HD Class 3 Bin 0
Transmission Type	e Code		
AMS	Automated Manual- Selectable (e.g. Automated Manual with paddles)	M	Manual
A	Automatic	OT	Other
AM	Automated Manual	SA	Semi-Automatic
CVT	Continuously Variable	SCV	Selectable Continuously Variable (e.g. CVT with paddles)
Drive System Code	e		
4	4-Wheel Drive	P	Part-time 4-Wheel Drive
F	2-Wheel Drive, Front	A	All Wheel Drive
R	2-Wheel Drive, Rear		
I			

Date: 01/07/2020 08:19:16 PM

Test Group	LTSLV00.0L2Y	Evaporative/Refueling Family				
Additional Terms and Acronyms						
AFC	Alternative Fuel Converter	ICI	Independent Commercial Importer			
CSI	Certificate Summary Information	ORVR	Onboard Refueling Vapor Recovery			
DF	Deterioration Factor	SIL	Shift Indicator Light			
Evap	Evaporation, Evaporative	Trans	Transmission			