



9/10/2021

Mr. Tristin Rojeck
Vehicle Programs and Compliance Division
Environmental Protection Agency
2000 Traverwood,
Ann Arbor, MI 48105

Subject: Request for issuance of a new Certificate of Conformity to include a running change of adding Model X Long Range variant under the Model X AWD Platform

Tesla, Inc. requests that the EPA issue a Certificate of Conformity for the subject test group.

Attached to this request is the Part 1 Application. Tesla believes that the test group complies with all applicable regulations contained within Title 40 of the CFR, California Amendments to Subparts B, C, and S, Part 86 and Part 88, Title 40 of the CFR and Title 13 of the California Code of Regulations

Vehicle Category:	Light Duty Vehicle (< 8000 lbs. GVW)
Durability Group:	MTSLEEVNNL2X
Test Group:	MTSLV00.0L2X
Summary Sheet No:	NA
Durability Group Description:	NA
Durability Vehicle:	NA
OBD Group:	NA
Test Group Description:	Tesla differentiates test groups based on: 1) battery type, 2) number of drive motors, and 3) vehicle line. L - Lithium Ion Battery 2 - Dual AC motors –base version (front / rear) & performance version (front/rear (big)) S - Model X Line of vehicles
Applicable Standards:	FEDERAL Tier 3 BIN 0 & CALIFORNIA ZEV
Carlines Covered by this certificate:	Model X Long Range

Your early review and issuance of the certificate will be greatly appreciated. If you have any questions, please contact me at our office at (510) 249 8749

Sincerely,

Suraj Nagaraj
Director - Vehicle Homologation

Contents

1	Communications
1.01	Mailing information
01.01.01	Certification information
01.01.02	Responsible official
3	Facilities, Equipment and Test Procedures
3.01	Procedure to determine mass emissions of the fuel fired heater
3.02	Battery pre-conditioning procedures
3.03	Vehicle Configuration and sub-configurations
3.04	Test Procedures
4	Statement of Compliance
5	Reserved
6	Maintenance
6.01	Test vehicle scheduled maintenance
6.02	recommended customer maintenance schedule
6.03	Lubricants and heater fuels
7	Labels
7.01	Label locations
7.02	Sample emission control information label
7.03	California Environmental Performance Index label: 2015 and later model years
7.04	Projected sales information
8	General Technical Description
8.01	Description of propulsion system
8.02	Description of motor(s)
8.03	Description of batteries
08.03.01	Battery charging capacity
08.03.02	Self-discharge information
08.03.03	Description of thermal management system
08.03.04	Definition of end-of-life
08.03.05	Description of battery disposal plan
8.04	Description of controller / inverter
8.05	Description of transmission
8.06	Description of climate control system
08.06.01	Electric heat pump
08.06.02	Fuel-fired heater
08.06.03	Climate control system logic
08.06.04	Tamper resistance of climate control system that includes a fuel-fired heater
8.07	Description of regenerative braking system
08.07.01	Control logic
08.07.02	Percentage of braking performed on road by each axle
8.08	Description of charger
08.08.01	Proper recharging procedures
08.08.02	Power requirements necessary to recharge vehicle
8.09	Accessories which draw energy from the batteries
8.10	Other unique features (solar panels)
8.11	Description of warning system(s) for maintenance / malfunction
08.11.01	Cut-off terminal voltages for prevention of battery damage
8.12	Description of dyno mode
8.13	Description of coastdown mode
9	Running Change vehicle description
10	Road load data
11	Starting and shifting schedules

11.01	Starting
11.02	Shifting
12	Reserved
13	Reserved
14	Reserved
15	Reserved
16	Reserved
17	California Requirements
17.01	Statement of compliance
17.01.01	General statement
17.01.02	Driveability statement
17.02	Supplemental data and certification review sheets
17.03	Engineering evaluation of zero evaporative emissions under any and all operating conditions (for vehicles equipped with fuel- fired heater only)
17.04	Credits
17.04.01	Description of multi-manufacturer agreements
17.04.02	Credit calculation
17.05	Vehicle safety
17.05.01	All information on safe handling of vehicle
17.05.02	Information on safe handling of battery system
17.05.03	Description of emergency procedures
17.06	Description of fuel-fired heater / fuel tank evaporative system
18	Fuel Economy Data Vehicle and De-Rating calculations

1 COMMUNICATIONS

1.01 Mailing information

01.01.01 Certification information

Tesla, Inc.
3500 Deer Creek Road
Palo Alto, CA 94304

01.01.02 Responsible officials

01.01.03 - Primary Contact

Mr. Suraj Nagaraj, Sr Director- Vehicle Homologation
Telephone 510-249-8749

01.01.04 - Secondary Contact

Mr. Ray Wang, Sr Homologation Engineer - Vehicle Homologation
Telephone 240-994-5639

3 FACILITIES, EQUIPMENT AND TEST PROCEDURES

Internal range test reports are on file at Tesla

3.01 Procedure to determine mass emissions of the fuel-fired heater

Not applicable; vehicle not equipped with a fuel fired heater.

3.02 Battery pre-conditioning procedures

The lithium ion battery cells are cycled by the battery cell manufacturer before they are assembled into battery packs. There is no further pre-conditioning necessary.

3.03 Vehicle Configurations and sub configurations

Refer to Appendix 03.03

3.04 TEST PROCEDURES

SAE J1634 (as revised 2012-10) was followed for all Range testing and SAE J2263 (as issued 1996-10) was followed for Road load measurement.

SPECIAL TEST INSTRUCTIONS

- See attachment

04.00 Statement of Compliance

This vehicle conforms to US EPA Federal Tier 3 Bin 0 and State of California regulations applicable to 2021 Model Year new ZEV Light-duty Vehicles

05.00 RESERVED

06.00 MAINTENANCE

6.01 Test vehicle scheduled maintenance

Not applicable.

6.02 Recommended customer maintenance schedule

See owner's manual.

6.03 Lubricants and heater fuels

Heater fuel: Not applicable

Transmission lubricant:	Factory Fill
Capacity	1.325 litres
Make	Exxon Mobile
Trade name	Dexron VI
Type	Mineral oil
Viscosity	11,500 cP at -40°C (-40°F)
Viscosity	5.8 cSt at 100°C (212°F)


Test Vehicle

Same as factory fill

07.00 LABELS


07.01 Label locations

VECI Emission Label

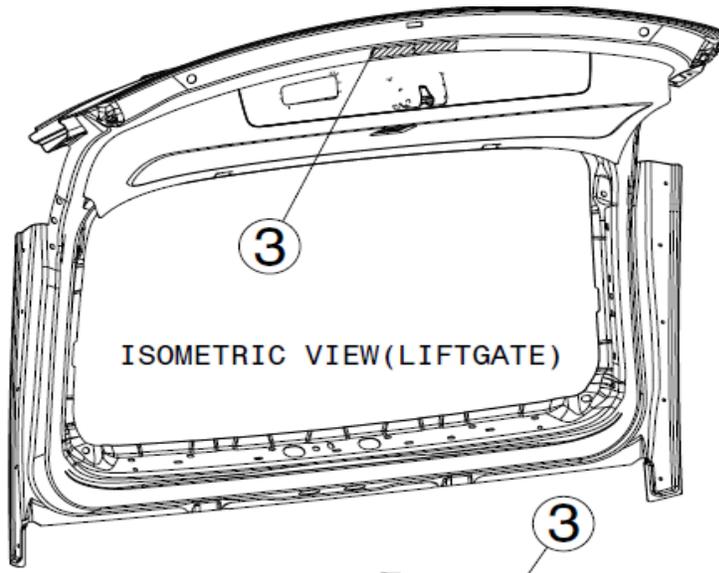

See 07.02

Monroney Label

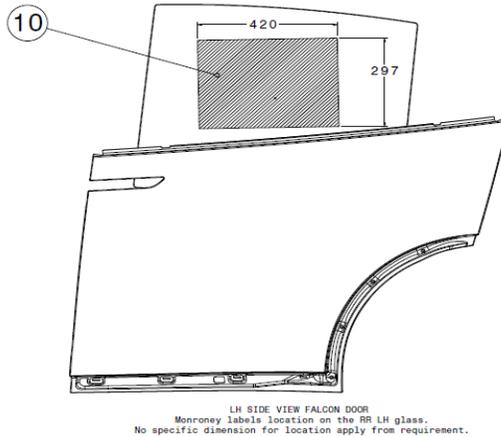

See 07.03

07.02 Emission Control Information label: 2021 Model Year

(Mandated in CFR Title 40, Part 86; §86.1807. Label format agreed with EPA)

<p>VEHICLE EMISSION CONTROL INFORMATION / INFORMATIONS SUR LE CONTRÔLE DES ÉMISSIONS DU VÉHICULE</p> <p>THIS VEHICLE CONFORMS TO U.S. EPA REGULATIONS APPLICABLE TO 2021 MODEL YEAR NEW TIER 3 BIN 0 LIGHT-DUTY VEHICLES AND TO CALIFORNIA REGULATIONS APPLICABLE TO ZEV PASSENGER CARS AND IS CERTIFIED FOR SALE IN CALIFORNIA. CE VÉHICULE EST CONFORME AUX NORMES DE L'USEPA APPLICABLES AUX VÉHICULES LÉGERS TIER 3 BIN 0 DE L'ANNÉE-MODELE 2021 ET AUX NORMES CALIFORNIENNES APPLICABLES AUX VÉHICULES À ZÉRO ÉMISSIONS ET EST CERTIFIÉ POUR VENTE EN CALIFORNIE.</p>	<p>MODEL / MODÈLE : 2021 TESLA MODEL X MOTOR / MOTEUR : 3 PHASE AC TEST GROUP / GROUPE D'ESSAI : MTSLV00.0L2X EVAPORATIVE FAMILY/FAMILLE DE GAZ D'ÉVAPORATION : MTSLR0000L2X</p>
--	---

1065843-00-H

07.03 California Environmental Performance Index label: 2021 Model Year

(Mandated in California Environmental Performance Label Specifications for 2009 and Subsequent Model Passenger Cars, Light-Duty Trucks and Medium-Duty Passenger Cars. Label format agreed with EPA/ CARB)

FE Label

EPA DOT

Fuel Economy and Environment

Electric Vehicle

These estimates reflect new EPA methods beginning with 2017 models.

Fuel Economy

MPG_e

Standard sport utility vehicles range from 13 to 101 MPG_e. The best vehicle rates 141 MPG_e.

combined city/hwy
 #### city
 #### highway
 #### kW-hr per 100 miles

Driving Range
 When fully charged, vehicle can travel about...
 0 50 100 150 200 250 300
 Charge Time: 12 hours (240V) #### miles

You save

\$#####

in fuel costs over 5 years
 compared to the average new vehicle.

Annual fuel cost

\$####

Fuel Economy & Greenhouse Gas Rating (tailpipe only)

1 10 10
Best

This vehicle emits 0 grams CO₂ per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also create emissions; learn more at fuel economy.gov.

Smog Rating (tailpipe only)

1 10 10
Best

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$ 7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at 0.13 per kW-hr. MPG_e is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

fuel economy.gov

Calculate personalized estimates and compare vehicles

Smartphone QR Code

<http://fuel economy.gov/qr?id=2019TSJ.075>

07.04 Projected sales information (Confidential)

08:00 GENERAL TECHNICAL DESCRIPTION

08.01 DESCRIPTION OF PROPULSION SYSTEM

Front Drive Unit:

Traction motor × 1,
Fixed ratio gearbox,
Drive inverter

Rear Drive Unit:

Traction motor × 1,
Fixed ratio gearbox,
Drive inverter

8.02 DESCRIPTION OF MOTOR(S)

Front Motor:

The motor is a 3-phase AC internal permanent magnet motor utilizing a six-pole, high-frequency design with inverter-controlled magnetic flux.

Rear Motor:

The motor is a 3-phase AC internal permanent magnet motor utilizing a six-pole, high-frequency design with inverter-controlled magnetic flux.

8.03 DESCRIPTION OF BATTERIES

The battery packs used in the Tesla Model X is one of the largest and technically most advanced lithium-ion battery packs in the world. Using customized automotive grade lithium-ion cells, the Tesla battery achieves unmatched energy density and enables the long range capability of the vehicle. The low-profile flat packaging enables an efficient and functional occupant area. The battery has a replaceable fuse that is accessible with the battery removed from the vehicle and a set of contactors inside the pack that disconnect high voltage from the positive and negative terminals on the battery pack. To disable contactors from closing during vehicle service, the 12V power feed can be disconnected in the vehicle fuse box. The battery control system consists of the Battery Monitoring System (BMS) which controls the contactors, measures pack current and voltages, electrical isolation of the battery from chassis ground and monitors cell brick voltages, module temperatures, and faults from the Battery Monitor Boards (BMBs) installed on each of the many modules. The battery is rated at 400V and is capable of delivering in excess of 1000 Amperes. The battery mass is greater than 500 kg.

08.03.01 Battery charging capacity

The battery when fully charged contains the approximate amount of energy based on the type of battery fitted onto the vehicle.

08.03.02 Self-discharge information

The self-discharge rate of the battery is likely to be less than 4% per month.

08.03.03 Description of thermal management system

The Tesla battery pack contains an integrated cooling system to ensure that the individual cells are maintained at, or close to, their optimum operating temperature. Incorporated in the vehicle system is an inline heating element to raise and a chiller to lower the pack temperature, when required.

08.03.04 Definition of end-of-life

The battery pack end-of-life shall be determined by Tesla's local service centers with Proper inspection and test methods.

08.03.05 Description of battery disposal plan

Tesla's lithium ion battery packs do not contain heavy metals such as lead, Cadmium, or mercury. They are exempt from hazardous waste disposal standards in the USA under the Universal Waste Regulations. However, they do contain recyclable materials, and Tesla plans to recycle all battery packs removed from vehicles.

Tesla highly recommends that all battery packs be taken to local Tesla service facilities and recycled by Tesla or Tesla authorized agencies, so that the battery packs can be recycled in a safe and efficient manner.

If disposing independently, without return to Tesla, then the owner must assume responsibility for recycling in a safe and legal manner. If an owner does assume this responsibility, Tesla recommends consulting with the appropriate local, state or federal authorities to determine the appropriate methods for disposal and recycling. Keep in mind that disposal regulations may vary dependent on location.

For more information on the recycling of Tesla custom battery packs, please call Tesla Customer Service at 1-877-79TESLA (1-877-798-3752).

08.04 DESCRIPTION OF CONTROLLER / INVERTER

The drive inverter performs several critical functions in the Tesla Model X including torque control, power and torque limit enforcement, and status monitoring. The drive inverter is an integral part of the drive unit.

08.05 DESCRIPTION OF TRANSMISSION

The Tesla Model X transmission is a fixed ratio, mechanical, transversely mounted gearbox with integral final drive unit (transaxle configuration).

The shift lever is mounted to the steering column. The lever has four detents—one reverse, one drive, and two neutral positions. Selecting either forward or reverse position enables drive current to the motor to generate the appropriate torque. There is no physical reverse gear needed.

In addition, the lever has a park button which is used to operate the electrically-actuated park brake.

8.06 DESCRIPTION OF CLIMATE CONTROL SYSTEM

General Specifications:

The Model X climate control modes include Defrost (Panel, Floor and any combination of these three). The system consists of four panel vents, two front row floor vents, defroster vent, second row floor vents, second row console vents with positive air shut off and turning vane manual control.

08.06.01 Electric cabin heater

The heater unit incorporating a variable speed electric fan is located in the front of the chassis tub with ducting directing the blown air to defrosting, face level and floor level vents in the passenger compartment. The heater element is of the positive temperature coefficient (PTC) type, drawing HV electrical energy from the battery pack High Voltage

08.06.02 Fuel-fired heater

Not applicable

08.06.03 Air conditioning

The Model X air conditioner system is an R134a refrigerant consists of a high voltage electric scroll type with integrated inverter with High Voltage Interlock Loop. The compressor Oil is Poly Olefin Ester oil that is non-conducting.

08.06.04 Climate control system logic

Remote Climate Control Module printed circuit board activates actuators and responds to evaporator air outlet temperature sensor, PTC heater outlet temperature sensor and air duct temperature sensors, as well as user demands from center display.

08.06.05 Tamper resistance of climate control system that includes a fuel-fired heater

Not applicable

08.07 DESCRIPTION OF REGENERATIVE BRAKING SYSTEM

Regenerative braking (RGB) occurs when the driver lifts their foot from the accelerator pedal while the vehicle is moving; the experience is analogous to engine braking on a gasoline-powered car with a conventional manual transmission. The friction braking system of the Tesla Model X is independent of RGB.

The amount of RGB torque generated is proportional to accelerator pedal position – full torque when the accelerator pedal is fully released; less as the pedal is depressed, reaching zero torque when the pedal reaches its neutral torque position (a position that is in fact a function of vehicle speed). The max RGB deceleration also varies depending on vehicle speed. The maximum RGB profile is defined as a target total deceleration rate as a function of vehicle speed. The max RGB profile is tailored to everyday driving conditions, which typically exhibit higher deceleration rates at lower speeds.

When the battery pack is near maximum capacity, regenerative braking function will be limited to ensure the maximum capacity of the battery is not exceeded. Any RGB limiting will be ramped in gradually to allow the driver to adapt to the changing RGB performance. When the battery pack is below 0 degrees, RGB will not be allowed because the batteries are not rated to accept charge below this temperature. Any RGB limiting will be ramped in gradually to allow the driver to adapt to the changing RGB performance. . The vehicle notifies the driver of any limits of the regenerative braking function.

08.08 DESCRIPTION OF VEHICLE ELECTRICAL SUPPLY EQUIPMENT (CHARGER)

The Tesla Model X is capable of accepting energy either from a permanent facility installed at the owners location or from many readily available power outlets when ‘on the road’.

The dedicated High Power Connector (HPC) can be purchased separately from the vehicle and a certified electrician will confirm the capabilities of the residential supply circuit at the vehicle owner’s location. Confirmation of a satisfactory residential electrical Supply will lead to the installation of a hard-wired HPC unit, this will expedite vehicle charging at the most efficient rate. The HPC can supply available current up to a maximum of 80 amps and incorporates electronic systems that communicate with the vehicle control systems to indicate the maximum available current so that the vehicle can determine the amount and rate of charge required.

Charging at rates lower than 80A can also be achieved via a mobile connector. The universal mobile connector is included as standard in the purchase of every Model X and is an individual cable that connects the vehicle to any available domestic power outlet and can deliver current to a maximum of 40 amps. The Mobile Connector incorporates the same electronic circuitry as the HPC to communicate with the vehicle and manage the charging process.

The vehicle is also capable of accepting DC current up to 225A from an off-board charger (Supercharger).

08.08.01 Proper recharging procedures

The charging system adjusts automatically to the available AC line voltage, frequency and current, within limits. The charging system in the vehicle works in conjunction with either of the three external charging stations; the permanently installed HPC, the permanently installed supercharger or the portable Mobile Connector.

Anytime the EV Inlet door is opened, the vehicle will prepare to enter CHARGE state. Once the user connects either supply cable to the vehicle, the charging system signals to the vehicle that it is ready to deliver the charge. The vehicle locks the cable onto the vehicle and then indicates that it is ready to accept energy and charging will commence. Failure of any of these steps will result in fault condition and lack of charge.

Prepare to charge state



Charging Indication



If the battery temperature is near or below freezing temperatures, normal charging will not occur. The vehicle will identify this condition and will begin heating the battery coolant and circulating the coolant to raise the battery temperature to enable charge. When the pack temperature rises to a temperature within the allowable charging range, heating will reduce or stop and charging will commence.

08.08.02 Power requirements necessary to recharge vehicle

If there are two on-board chargers installed in the vehicle it is designed to accept AC current from 110-120V or 208-240V outlets with a supply of up to 80A. If there is a single on-board charger installed in the vehicle, then the AC current will be limited to 40A.

08.10 OTHER UNIQUE FEATURES (i.e. solar panels)

Not applicable; vehicle is not equipped with any such features.

08.11 DESCRIPTION OF WARNING SYSTEM(S) FOR MAINTENANCE / MALFUNCTION

The Tesla Model X is equipped with a tell-tale lamp located in the instrument pack to indicate battery malfunctions; the lamp illuminates yellow for a minor defect and red for a major fault.

The tell-tale is complemented by more detailed information exhibited on the Center Display. An additional driver aid which indicates the nature of the malfunction as well as a wide range of additional vehicle data, such as when maintenance is needed.

08.11.01 Cut-off terminal voltages for prevention of battery damage

The control electronics inside of the Drive Unit and Charger are programmed not to allow the unit to drive the voltage of the battery above or below hard voltage limits. If the battery pack is unable to achieve a desired response from these systems and the voltage reaches above or below a set limit, the two contactors inside the battery pack will open, disabling the entire high voltage system in the car.

8.12 DESCRIPTION OF DYNO MODE

Tesla, Inc. implemented user interface (UI) features that enable access to our "Dyno Mode" for all users. This feature is required to be enabled to maintain representative driving controls while testing on a chassis dynamometer.

In order to preserve the proper driving functionality and behavior, Dyno Mode executes the following features:

- Disable Stability Control to ensure no false interaction with the dyno.
- Disable Traction Control to ensure no false interaction with the dyno.
- Disable Active Drive Line Damping to avoid inducing oscillations in the dyno.
- Force the torque split to be as it would be under normal straight-line driving conditions
- Disable Brake Disk Wipe

When the Stability Control and Traction Control systems become faulted, as is the case on a dynamometer where driving is detected but movement is not, regenerative braking is disabled so that unintended braking torque does not lead to loss of traction or control on low friction surfaces. Disabling Stability Control and Traction Control prevents those systems from disrupting regenerative braking behavior, maintaining the most representative driving energy consumption.

Dyno Mode can be activated by the user, according to the steps in the driver's guide.

Dyno Mode can be deactivated by the user by pressing the "Power Off" button within the Safety & Security tab of the UI.

8.13 DESCRIPTION OF COASTDOWN MODE

To engage Coastdown Mode:

1. Press and hold Tesla T to bring up Access Code prompt
2. Type "coastdown"

Vehicle Behavior:

UI will send out a binary signal in the message on the right bus. The thermal controller should consume this message and unconditionally close the louver and turn off the refrigerant system.

Display "COASTDOWN" in cluster where we display other mode info like "VALET" and "CHILL"

Coastdown Mode will turn OFF after drive cycle is complete.

09.00 RUNNING CHANGE VEHICLE DESCRIPTION

Refer to appendix 09.00, if applicable

10.00 ROAD LOAD DATA

See attachment

11.00 STARTING AND SHIFTING SCHEDULES

11.01 Starting

The Model X does not have a traditional starter switch and instead has a smart entry system for greater safety and customer convenience. The smart entry system comprises of a smart key, a weight sensor embedded into the driver seat, and the brake pedal. When the driver enters the vehicle with the smart key and sits on the driver's seat, the vehicle controller, attempts to validate the unique key code by reading the key code. If successful interaction between the coded key and vehicle controller occurs, the system deactivates the immobilizer. The vehicle then enters accessory mode analogous to a "ACC" position on a conventional IC engine. In this mode, low voltage (12V) is supplied to the vehicle allowing operation of the radio and other accessories connected to the accessory rail. High Voltage (HV) necessary to enable vehicle propulsion is enabled only by the closing of the contactors, which can only be triggered when the following conditions are both satisfied,

1. Smart key is detected and key code is validated AND
2. Brake pedal is depressed.

By requiring brake pedal activation, along with the appropriate key code, this system ensures the safety of vehicle occupants by not allowing self mobility of the vehicle without the driver providing proper control inputs (i.e., service brake activation) and appropriate driver authorization (i.e., presence of the key code). If either the service brake is not activated or the key code not present, the vehicle controller will not close the connectors and self-mobility is not possible.

If the brake pedal is depressed and the proper key code present, the drive rail will activate and allows the transmission to be shifted out of Park.

11.02 SHIFTING

Not applicable – the vehicle has a single-speed transmission.

12:00 -16:00 RESERVED

17:00 CALIFORNIA REQUIREMENTS

17:01 Statement of Compliance

17.01.01 General Statement

The production vehicles which are subject to registration or sale in the State of California will be, in all material respects, substantially the same in construction as test vehicles which are certified by the California Air Research Board; and will meet all the applicable emissions standards which are promulgated by the California Air Research Board in accordance with Section 43101 of the Health and Safety Code.

Tesla attests that the vehicle emission control label complies with the label durability requirements of the “California Motor Vehicle Emission Control and Smog Index Label Specifications”, Title 13, CCR, Section 1965.

17.01.02 Drivability statement

This statement is no longer included in the California Exhaust Emission Standards and Test Procedures for 2001 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles (as of January 01 2006); as was the case in previous versions.

17.02 Supplemental data and certification review sheets

See attached

17.03 Engineering evaluation of zero evaporative emissions under any and all operating conditions (for vehicles equipped with fuel-fired heater only)

Not applicable; vehicle is not equipped with fuel-fired heater.

17.04 Credits

17.04.01 Description of multi-manufacturer arrangements

Not applicable; Tesla has no such agreements in place.

17.04.02 Credit calculation

Tesla a manufacturer that produces only pure battery electric vehicles is not required to produce a percentage of annual production volume as ZEV's and therefore will earn such credit on all 2013 to 2021, inclusive, model year vehicles. This vehicle is a full function ZEV with a range depending on the battery pack option chosen by the customer. Based on the UDDS of range shown in the table below, all variants will be classified as a Type III ZEV and Under the table in 13 CCR 1962.1(d)(5)(C), this means 2013 to 2021, each vehicle will earn 4 credits or below per vehicle.

Variant	UDDS Range (Miles)	/	Credits per Vehicle
Model X Long Range			494 / 4

17.05 VEHICLE SAFETY

17.05.01 All Information for safe operation of vehicle

See owner's manual.

17.05.02 Information on safe handling of battery system

HANDLING

Do not short circuit, puncture, incinerate, crush, immerse, force discharge, or expose the battery pack to temperatures outside the specified maximum storage temperature range of -20°C to 60°C.

The battery pack has a nominal operating voltage of 400 VDC. The battery pack is sealed in a rigid metal case and its exterior is isolated from high voltage. Handling the battery pack is electrically safe provided the enclosure remains closed.

The battery pack contains hermetically sealed lithium ion cells that contain a number of chemicals and materials of construction. Risk of exposure to electrode materials and Liquid electrolyte will only occur in cases of mechanical or thermal abuse of the battery Pack.

STORAGE

Do not store the battery pack in a manner that allows terminals to short circuit. Do not place near heating equipment, nor expose to direct sunlight for long periods. The battery pack should only be stored in approved packaging and stacked no more than two (2) packages high. To maintain service life, the battery pack should be stored at a state of charge (SOC) of 15 to 50%.

TRANSPORT

Lithium ion batteries are regulated as Class 9 Miscellaneous dangerous goods (also known as “hazardous materials”) pursuant to the International Civil Aviation Organization.

(ICAO) Technical Instructions for the Safe Transport of Dangerous Goods by Air, International Air Transport Association (IATA) Dangerous Goods Regulations, the International Maritime Dangerous Goods (IMDG) Code, European Agreements concerning the International Carriage of Dangerous Goods by Rail (RID) and Road (ADR), and applicable national regulations such as the USA’s hazardous materials regulations (see 49 CFR 173.185). These regulations contain very specific packaging, labelling, marking, and documentation requirements. The regulations also require that individuals involved in the preparation of dangerous goods for transport be trained on how to properly package, label, mark and prepare shipping documents.

17.05.03 Description of emergency procedures

HIGH VOLTAGE EXPOSURE

If one of the Tesla products has been visibly damaged or its enclosure compromised, then practice appropriate high voltage preventative measures until the danger has been assessed (and dissipated if necessary).

FIREFIGHTING MEASURES

If a fire or explosion occurs when the battery pack is charging, shut off power to the charger. In case of burning lithium ion fires, flood the area with water. The water may not extinguish them, but will cool the adjacent batteries and control the spread of the fire. CO₂, dry chemical and foam extinguishers are preferred for small fires, but also may not extinguish burning lithium ion batteries. Burning batteries will burn themselves out. Virtually all fires involving lithium ion batteries can be controlled with water. When water is used, however, hydrogen gas may be a by-product which can form an explosive Mixture with air. LITH-X (powdered graphite) or copper powder fire extinguishers, sand, dry ground dolomite or soda ash may also be used. These materials act as smothering agents.

Damaged or opened cells or batteries can result in rapid heating (due to exothermic reaction of constituent materials) and the release of flammable vapors. Water (and other items listed above) disperses heat when applied in sufficient quantity to a fire. Extended heat exposure can lead to ignition of adjacent cells with a potential complete envelopment of the battery pack if not cooled. An extinguished lithium ion battery fire can re-ignite due to the exothermic reaction of constituent materials from broken or damaged cells. To avoid this, remove sources of ignition and cool the burned mass by flooding with (or immersing in) water. Fire-fighters should wear self-contained breathing apparatus. Cells or batteries may flame or leak potentially hazardous organic vapors if exposed to excessive heat, fire or over voltage conditions. These vapors include HF, oxides of carbon, aluminum, lithium, copper, and cobalt. Additionally, volatile phosphorus pentafluoride may form at temperatures above 230° Fahrenheit. Never cut into the sealed battery pack enclosure due to the high voltage and electrocution risks.

If a decision is made to fight a battery fire aggressively, then large amounts of water should be applied from a safe distance with the intent of flooding the battery pack enclosure as completely as possible. Alternatively, if a decision is made to fight a battery fire defensively, then the fire crew should pull back a safe distance and allow the battery to burn itself out. Fire crews may choose to utilize a water stream or fog pattern to protect exposures or control the path of smoke.

FIRST AID MEASURES

Under normal conditions of use, the constituent battery cells are hermetically sealed. Contents of an open (broken) constituent battery cell can cause skin irritation and/or chemical burns. If materials from a ruptured or otherwise damaged cell or battery contact skin, flush immediately with water and wash affected area with soap and water. For eye contact, flush with significant amounts of water for 15 minutes and see physician at once. Avoid inhaling any vented gases. If a chemical burn occurs or if irritation persists, seek medical assistance. Seek immediate medical assistance if an electrical shock or electrocution has occurred (or is suspected).

17.06 Description of fuel-fired heater / fuel tank evaporative system

Not applicable; vehicle is not equipped with fuel-fired heater.

18.00 FUEL ECONOMY DATASETS

Model X Long Range

CD UDDS Test (provided by VERIFY)

AC Recharge Energy, kWh

(AER) Unadjusted, Miles

CO2 Composite Adjusted

XD321-325808

MTSL10071388

114.97

493.55

0 g/mi (factors into 0 g/mi on FE label)

CD Highway Test (provided by VERIFY)

AC Recharge Energy, kWh

(AER) Unadjusted, Miles

CO2 Composite Adjusted

MTSL10071389

114.97

447.93

0 g/mi (factors into 0 g/mi on FE label)

E.O.#:

Page:

2021 MODEL-YEAR AIR RESOURCES BOARD
SUPPLEMENTAL DATA SHEET
ZEV-PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM DUTY VEHICLES

Model X Long Range

Manufacturer	Tesla, Inc.
Engine Family	MTSLV00.0L2X
Vehicle Class (es)	Passenger Car
Number of ZEV Credits per vehicle	4
Fuel Type (s)	Electro-Chemical Battery
Battery Type (s)	Lithium Ion
Total Battery Weight, Kg	537
Total Battery Volume, m3	0.400
Battery Specific Energy, Wh/Kg	186.2197393
Number of Batteries or modules per vehicle	1
Total Battery Voltage, Nominal	410
Charger(s)	On-Board
Charger(s)	Conductive
Drive Motor (s) (Front)	Other (Specify) - AC Permanent Magnet
Drive Motor (s) (Rear)	Other (Specify) - AC Permanent Magnet
Number of Drive Motor (s)	2
Rated Motor Power, kW	243 (Front) / 248 (Rear)
Drive	4WD-FT
Regenerative Braking	Yes
Regenerative Braking	RW
Driver Controlled Regen Braking	No
Coast Regen Braking	Yes
Air Conditioning	Yes
Fuel-Fired Heater	No

Vehicle Models (If coded, see attachments)	Model X Long Range
Transmission Type: M5, A4 (if applicable)	AV/1
GVWR, lbs	6250
Curb Weight, 33%, lbs	5219
Loaded Vehicle Weight	5519
ETW or Test Weight, lbs	5500
DPA / RLHP or Dyno Set Coefficient, a= , lbf	-11.147
DPA / RLHP or Dyno Set Coefficient, b= , lbf/mph	0.316
DPA / RLHP or Dyno Set Coefficient, c= , lbf/mph^2	0.014

Range Test Results

Vehicle ID	XD321-325808
Transmission	AV/1
ETW	5500
RLHP	12.91

City Range, miles	493.55
System AC, Wh/mile	232.94
System DC, Wh/mile	209.88
Vehicle DC, Wh/mile	202.56

Highway Range, miles	447.9
System AC, Wh/mile	256.67
System DC, Wh/mile	231.26
Vehicle DC, Wh/mile	223.20

Battery Test Results - Specific Energy, wh/kg	165
Fuel-Fired Heater Emission Results, g/mile	Not applicable

3.03 Vehicle Configuration and sub-configurations


Make Carline Type Test Group Final Drive ratio Emission Control Exhaust Evap Model Type Basic Engine code (F/R) Transmission Type / Code Vehicle ID tested	Tesla Model X Battery Electric Vehicle MTSLV00.0L2X 1 NA (BEV) NA (BEV) NA (BEV) Model X Long Range L2X AV/1 XD321-325808
Vehicle Configuration # Gross Vehicle Weight (lbs) 33% Curb Mass (lbs) Loaded Vehicle Weight (lbs) Equivalent Test Weight (lbs) Base wheel / Tire (F&R) Target Road Load A lbf B lbf/mph C lbf/mph ² RLHP @ 50mph	0 6250 5219 5519 5500 265/45R20 (F) 275/45R20 (R) 33.56 0.4237 0.0168 12.91
Sub configuration # Gross Vehicle Weight (lbs) 33% Curb Mass (lbs) Loaded Vehicle Weight (lbs) Equivalent Test Weight (lbs) Wheel / Tire Target Road Load A lbf B lbf/mph C lbf/mph ² Road Load HP @ 50mph	1 6250 5219 5519 5500 265/35R22 (F) 285/35R22 (R) 37.07 0.6125 0.0141 13.72

Fuel Economy Data Vehicle (FEDV) Selection Justification – FEDV curb mass vehicle accounts for options that have a greater than 33% take rate and highest sold wheel/tire combination that collectively represents a vehicle configuration / sub configuration that has the largest sales volume within that Model Type. Tesla affirms that the road load power, and the target coefficients are those that are appropriate for the ETW of the vehicle.




Model X Driver's Guide

Basic Functions - Doors

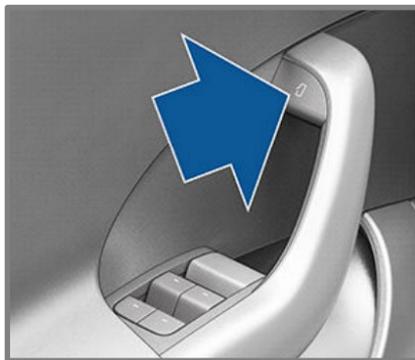

Opening Door – Exterior


1. Press the exterior door handle. The door will automatically present itself.

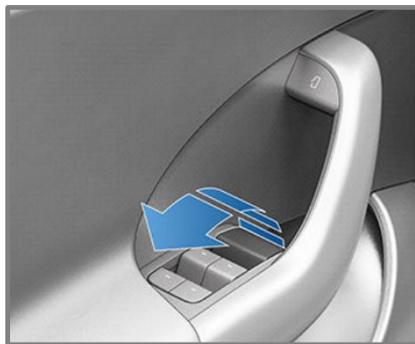

Opening Door – Interior

1. Press the release icon to unlatch the door.
2. Pulling this lever upwards will manually open the door.

Basic Functions – Starting Vehicle

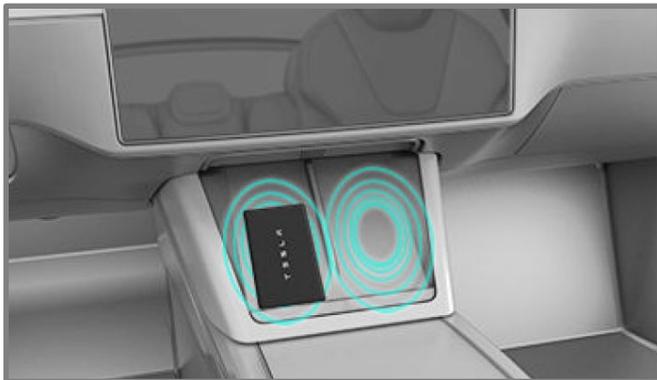


1. Place the key on the left side of the wireless charging slot
2. Press the brake pedal to turn ON the vehicle
3. If successful, the PRND should illuminate on the center console and show up on the instrument cluster.





Basic Functions – Changing Gears




- When you press the brake pedal when parked, a gear strip displays on the left side of the touchscreen. Use the gear strip to shift gears.
 - Up for DRIVE
 - Down for REVERSE
- To shift into PARK, press the brake pedal and touch the PARK button on the touchscreen gear strip.
- NEUTRAL can be accessed in the controls tab of the menu. **Press and hold** the neutral icon while your foot is on the brake pedal.

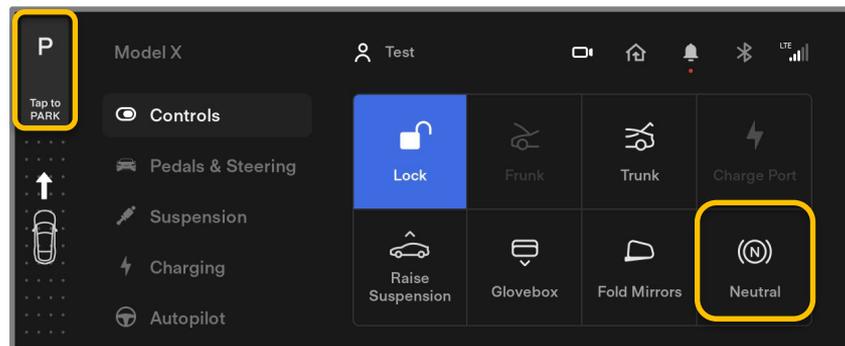


CAN harness & Memorator

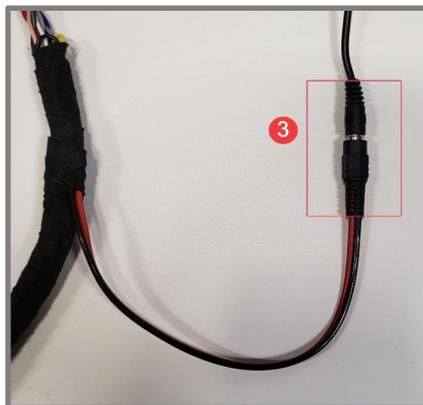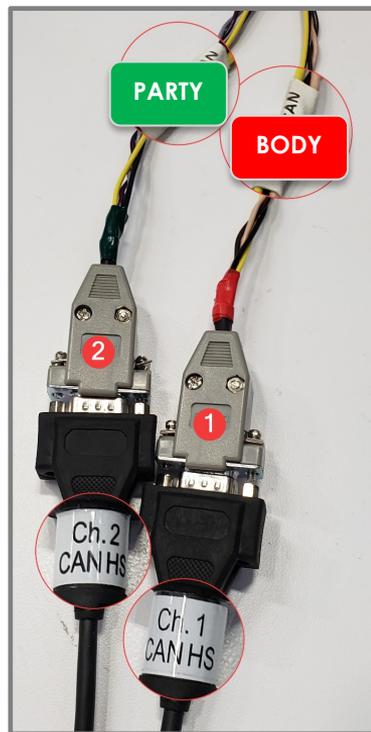

1. Channel 1 connects to BODY CAN (RED TAPE)
2. Channel 2 connects to Party CAN (GREEN TAPE)
3. External power is needed for harness to power memorator
4. Power LED should flash green while traffic LED's will be solid yellow when recording
5. Red traffic LED's can be caused by SD card inserted incorrectly, misconfigured SD card or loose connections
6. Harness plug in location
 - To start/stop recording, connect/disconnect channel 1

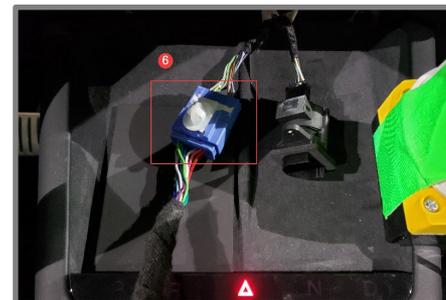

Entering DYNO Mode

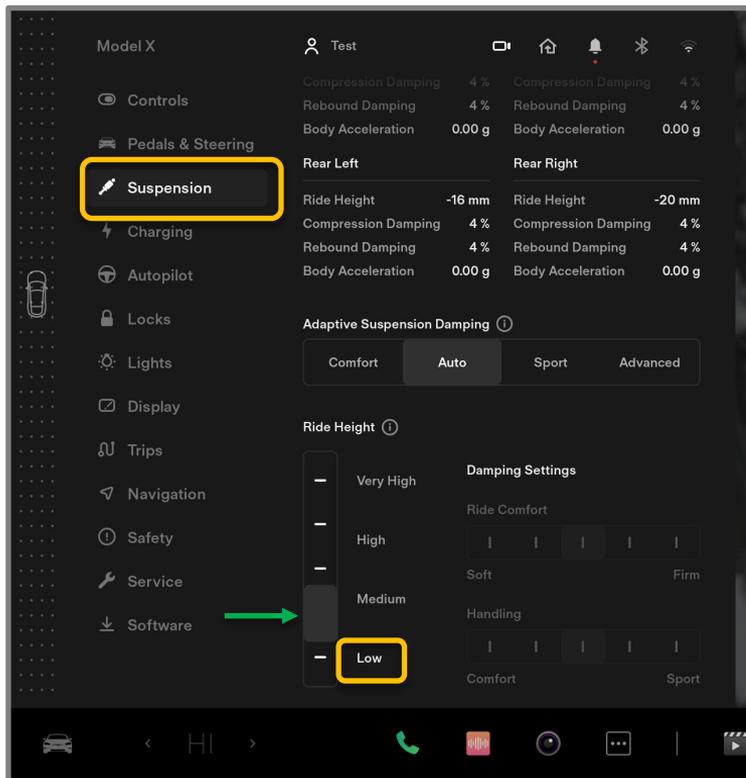

The purpose of dyno mode is to preserve the proper driving functionality and behavior while the vehicle is driven on a dyno.


Dyno Mode includes:

- Disabling stability and traction control
- Disabling Active Drive Line Damping and ride height adjustment at speed
- Force the torque split to be as it would be under normal straight-line driving conditions
- Disabling Brake Disk Wiping

Entering DYNO Mode

1. With the vehicle parked on a level surface, adjust the suspension to low.
2. Press the brake pedal to turn ON the vehicle. In the vehicle menu under the suspension tab, press LOW

Entering DYNO Mode

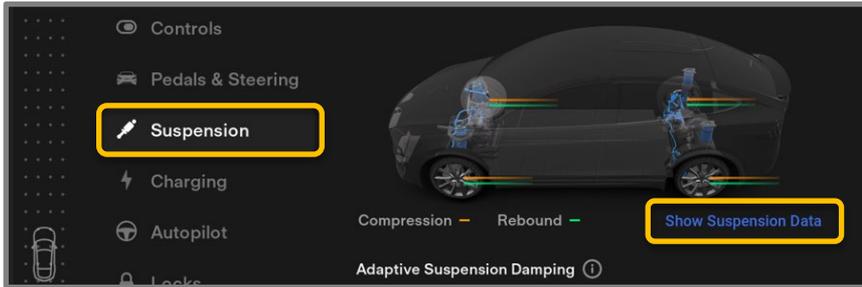

Compression — Rebound — Hide Suspension Data


Front Left		Front Right	
Ride Height	-20 mm	Ride Height	-20 mm
Compression Damping	4 %	Compression Damping	4 %
Rebound Damping	4 %	Rebound Damping	4 %
Body Acceleration	0.00 g	Body Acceleration	0.00 g
Rear Left		Rear Right	
Ride Height	-20 mm	Ride Height	-20 mm
Compression Damping	8 %	Compression Damping	8 %
Rebound Damping	4 %	Rebound Damping	4 %
Body Acceleration	0.00 g	Body Acceleration	0.00 g

Verify that all 4 corners of the vehicle are close to **-20mm**.


Tolerance: +/- 5mm

- Under the suspension tab, select "Show Suspension Data"
- Verify that all 4 corners of the vehicle are close to **-20mm**
 - Tolerance: +/- 5mm


Entering DYNO Mode

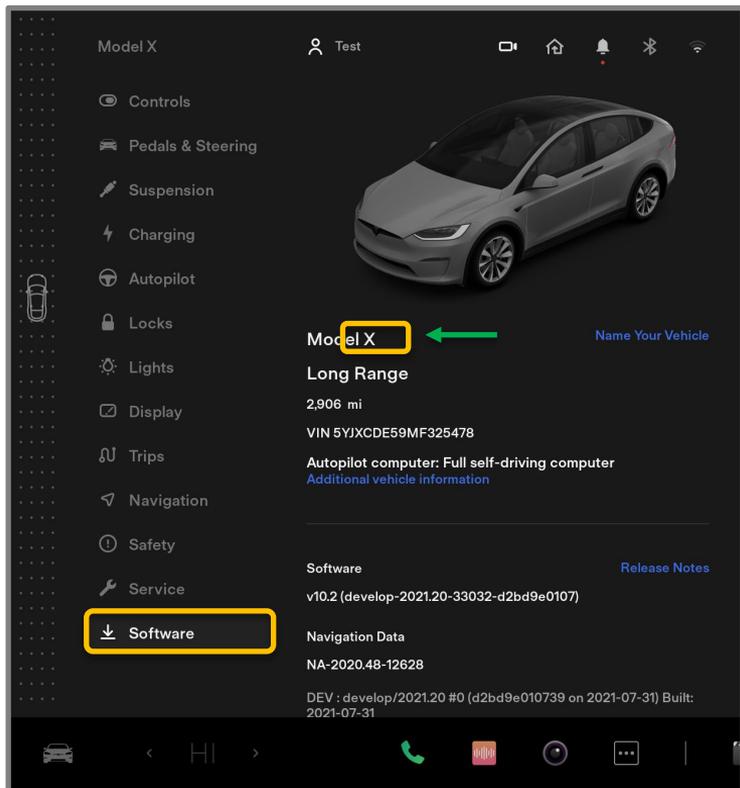

5. Under the software tab of the vehicle's menu, hold on the X show in the photo to the left.
6. A window will appear asking for an access code. Enter the word **DEERCREEK**. The developer screen will appear.

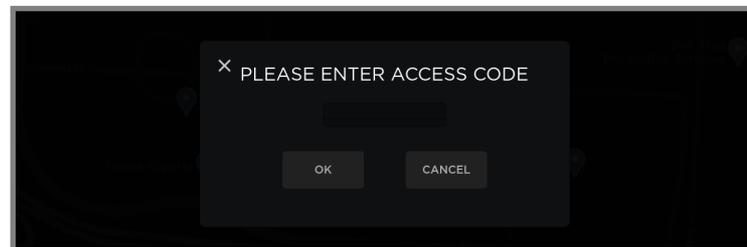


Entering DYNO Mode

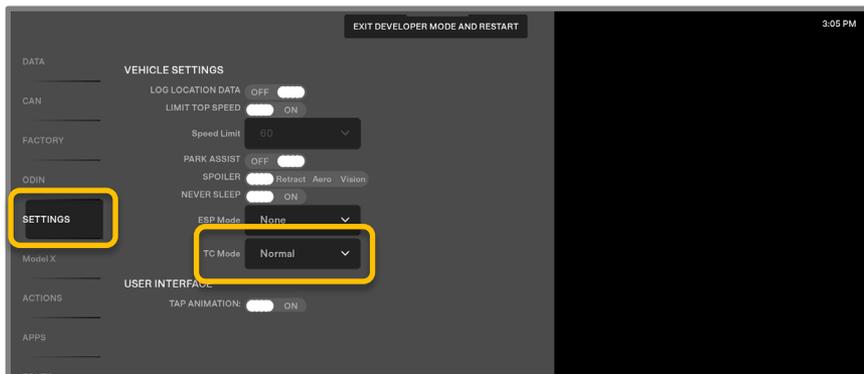


7. In the developer screen, under the settings tab. Change the TC Mode setting from Normal to DYNO.

8. DYNO MODE will appear on the UI if these steps were done successfully.

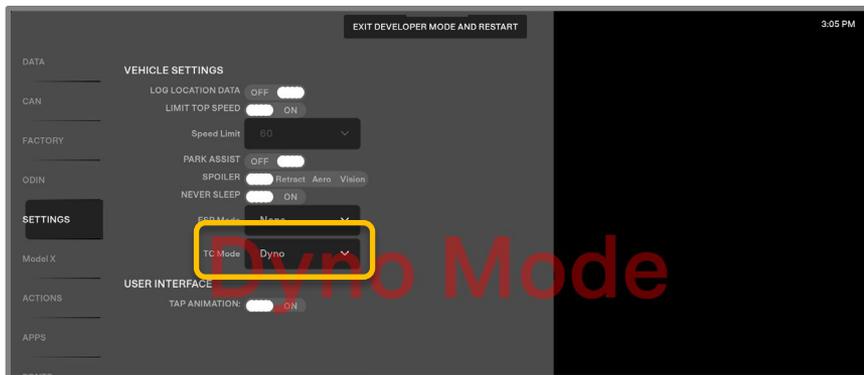


Controls

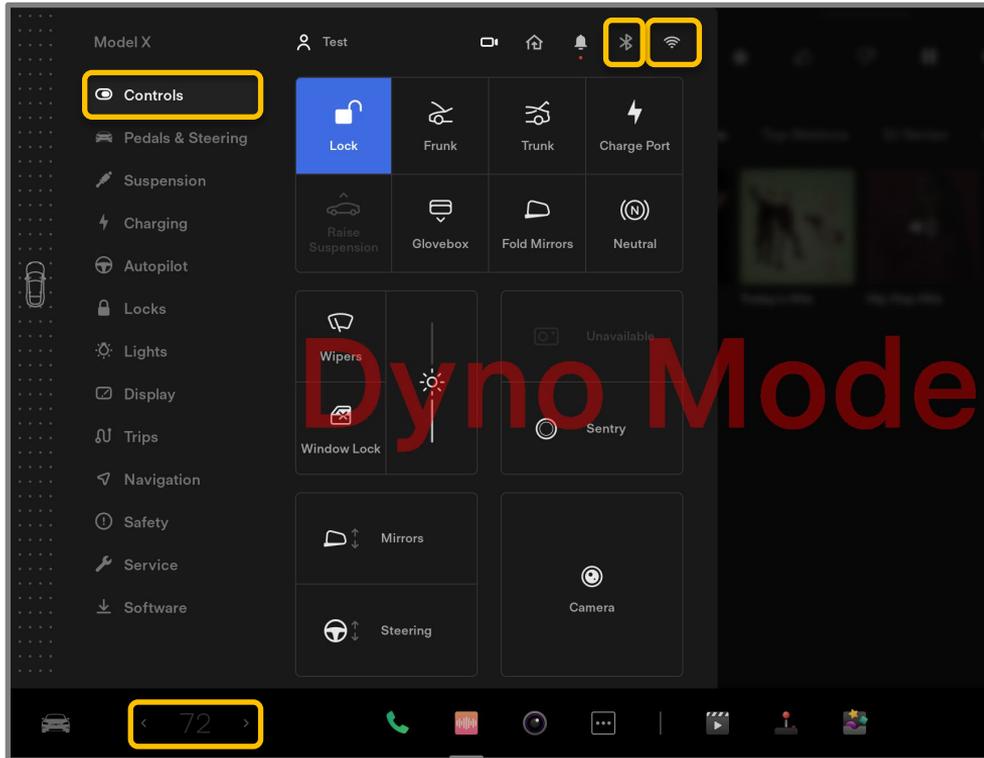

- The following slides are vehicle settings that should be checked and set to the correct settings prior to vehicle testing.
 1. Verify that HVAC is off during all testing.
 2. Wi-Fi should be turned off
 3. Bluetooth devices should be connected to the vehicle during testing.


Pedals & Steering

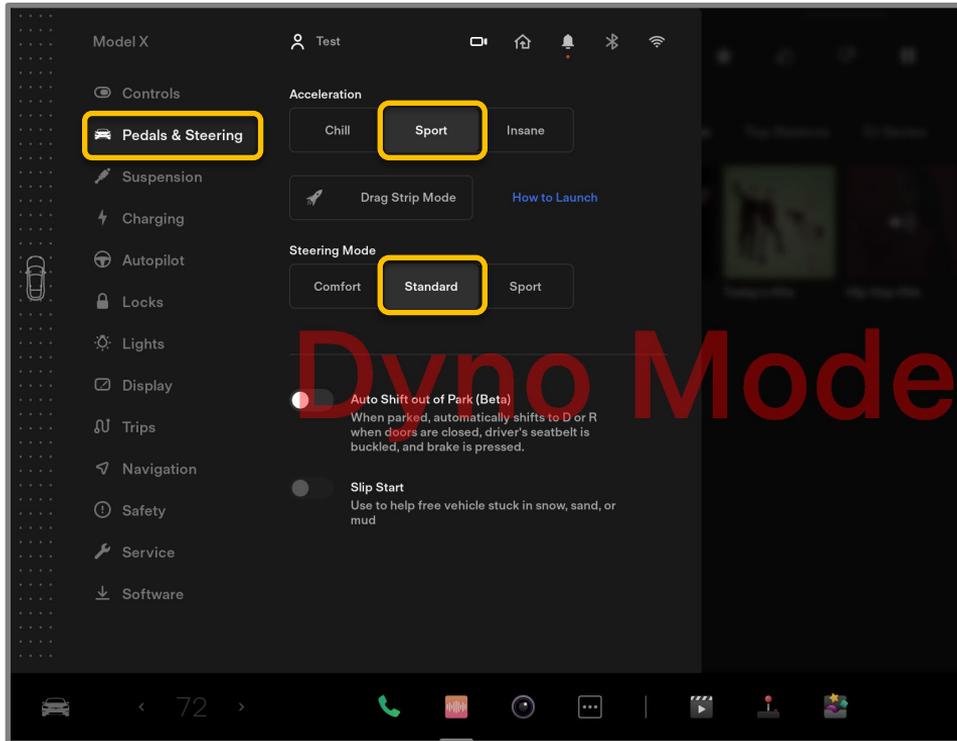

Settings

- **Acceleration**
 - Sport
- **Steering Mode**
 - Standard
- **Autoshift**
 - Off
- **Slip Start**
 - Off


Suspension

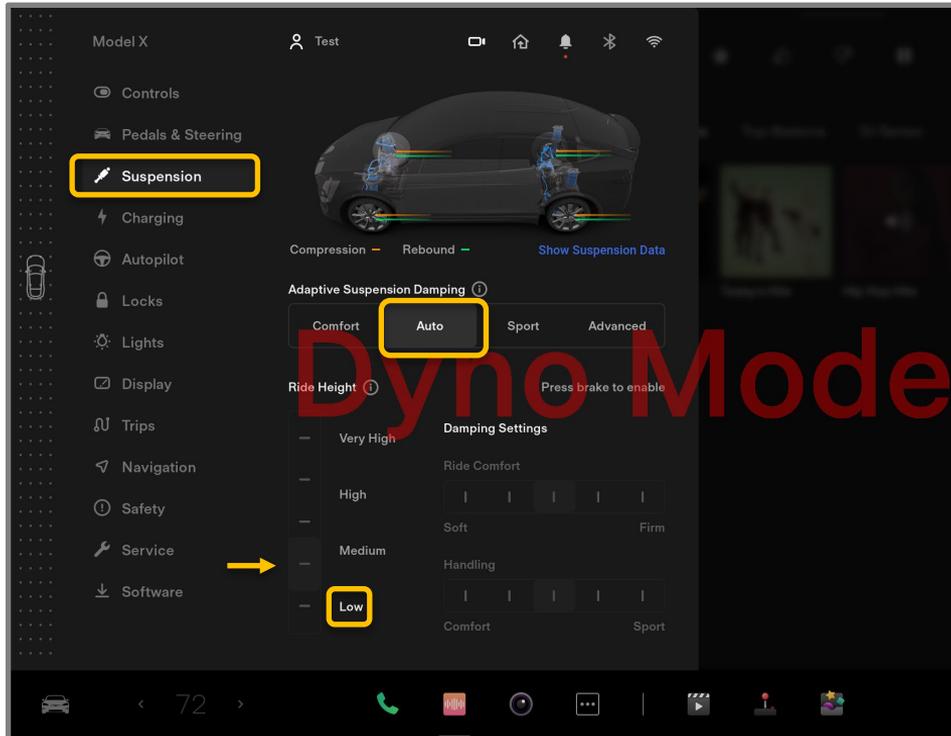

Settings

- **Adaptive Suspension Damping**
 - Auto
- **Ride Height**
 - Low
 - Note where the UI slider is relative to the graph
 - The suspension should be set to low and locked into that setting with dyno mode


Charging

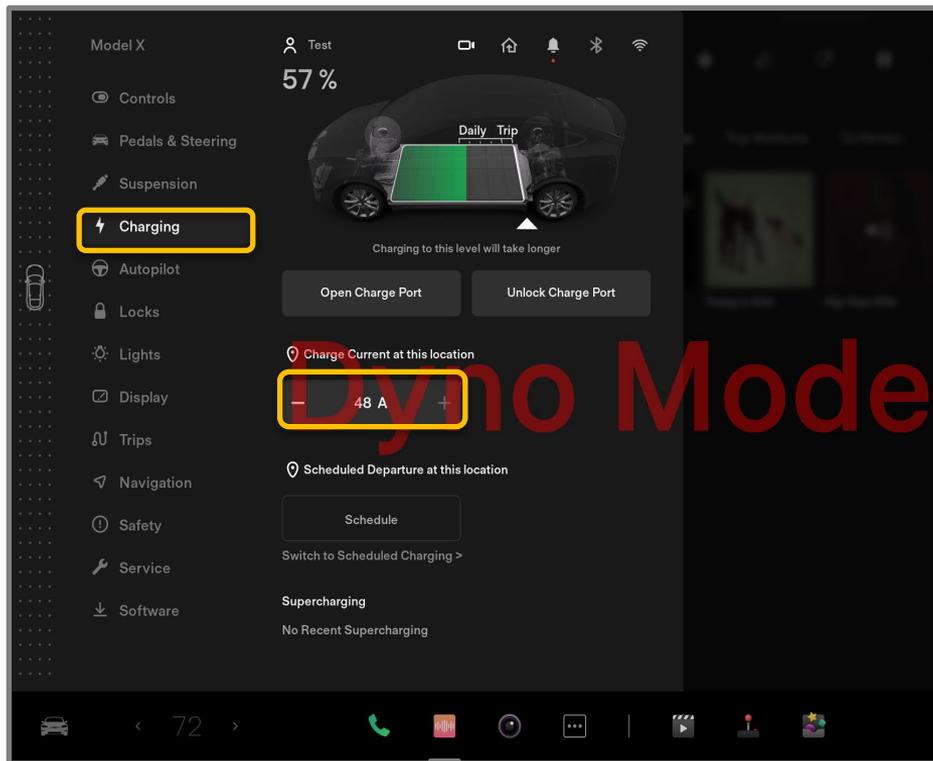

Settings

- **Charge current limit**
 - 48 amps


Autopilot

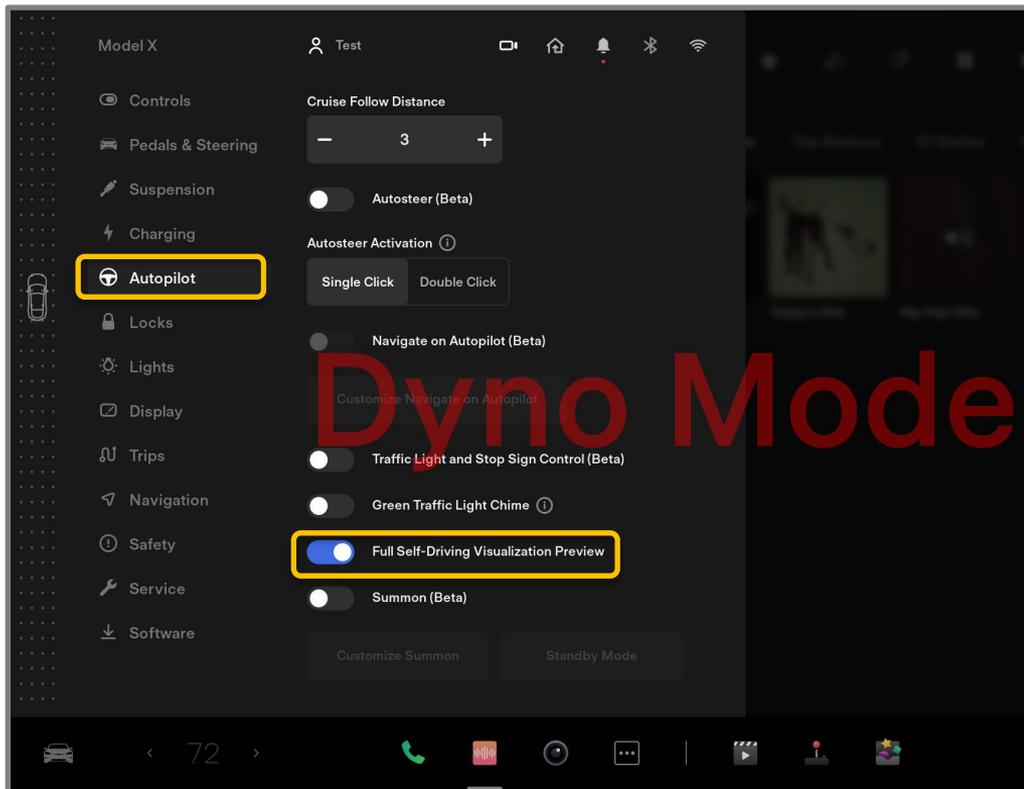

Settings

- **Cruise Follow Distance**
 - Off
- **Autosteer**
 - Off
- **Autosteer Activation**
 - Off
- **Navigate on Autopilot**
 - Off
- **Traffic light and stop sign control**
 - Off
- **Green light chime**
 - Off
- **Full Self-Driving Visualization**
 - ON
- **Summon**
 - Off


Autopilot

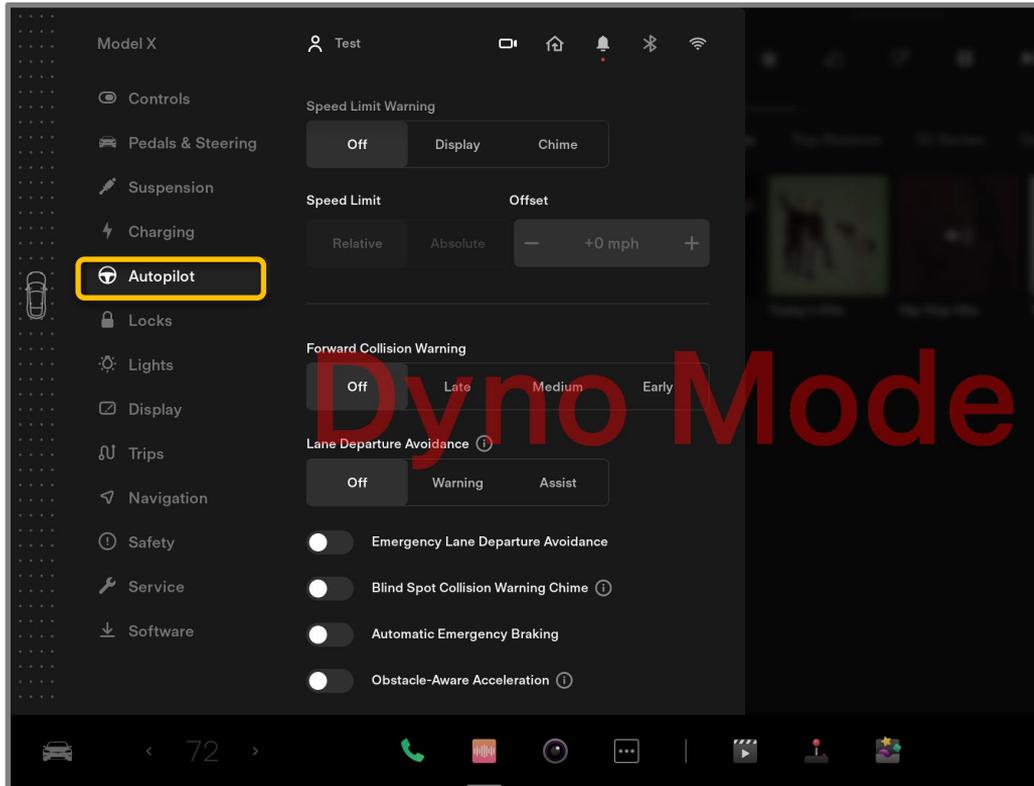

Settings

- **Speed Limit Warning**
 - Off
- **Forward Collision Warning**
 - Off
- **Lane Departure Avoidance**
 - Off
- **Emergency Lane Departure Avoidance**
 - Off
- **Blindspot Collision Warning Chime**
 - Off
- **Automatic Emergency Braking**
 - Off
- **Obstacle Aware Acceleration**
 - Off

Locks

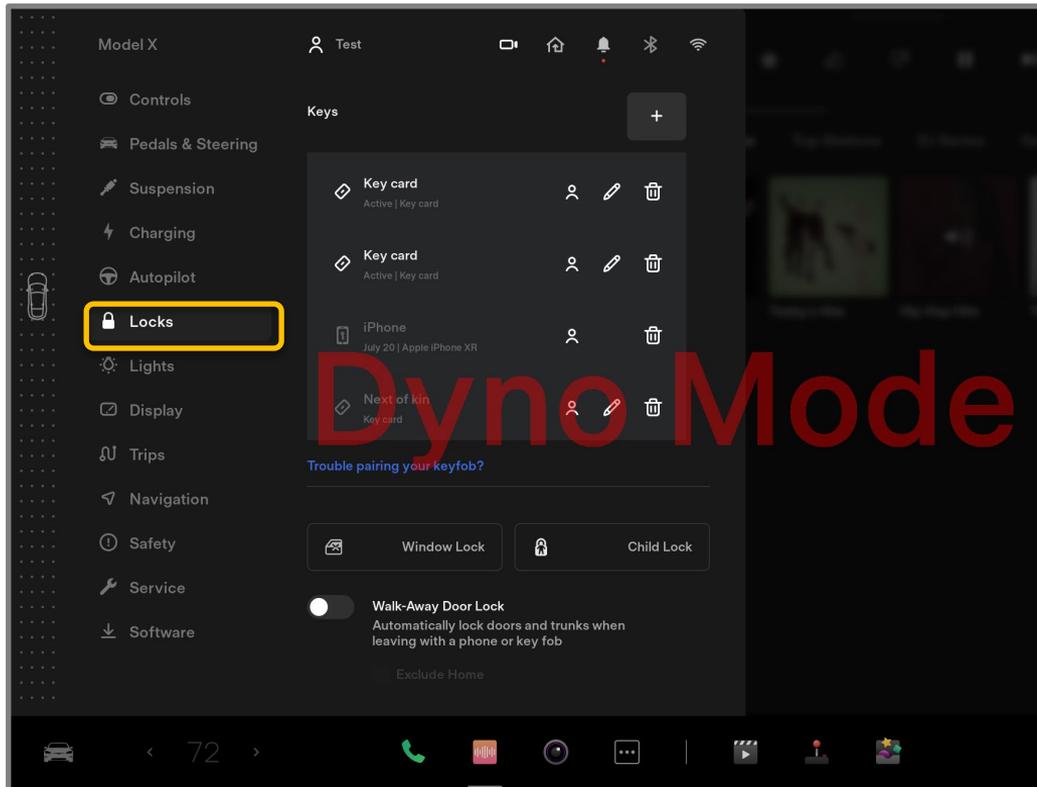


Settings

- **Walk-Away Door Lock**
 - Off

Dyno Mode


Lights

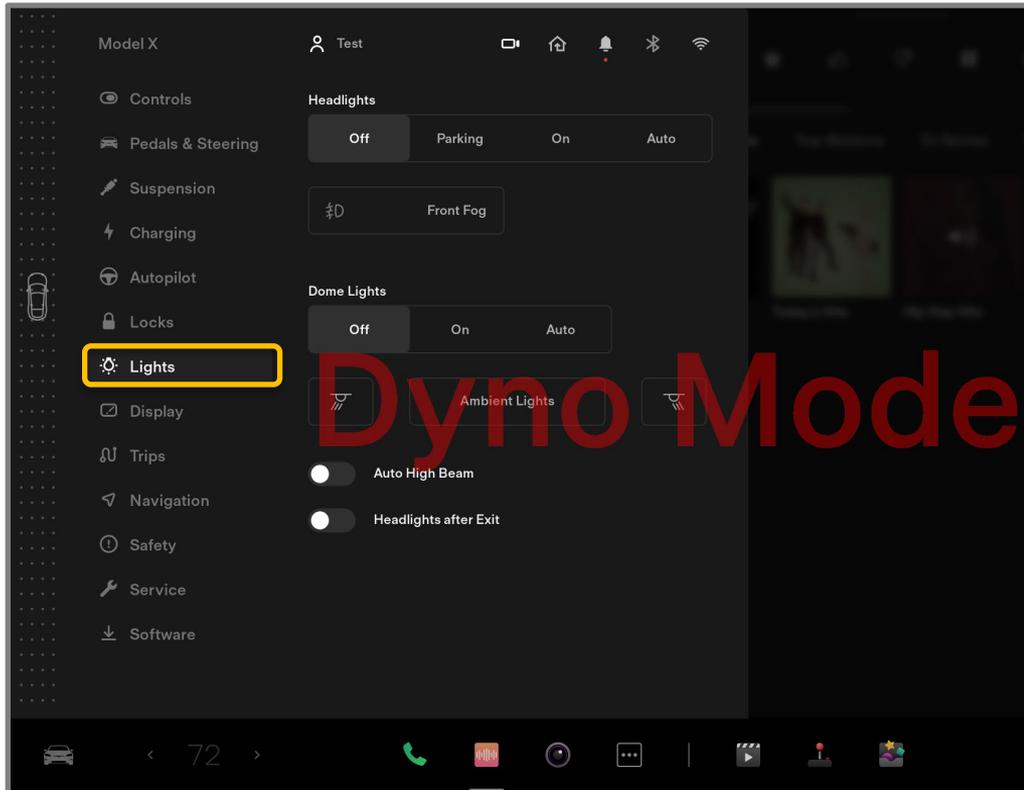

Settings

- **Headlights**
 - Off . Verify lights are turned off while any vehicle testing is being performed.
- **Front Fog**
 - Off
- **Dome Lights**
 - Off
- **Ambient Lights**
 - Off
- **Auto High Beams**
 - Off
- **Headlights after Exit**
 - Off


Display

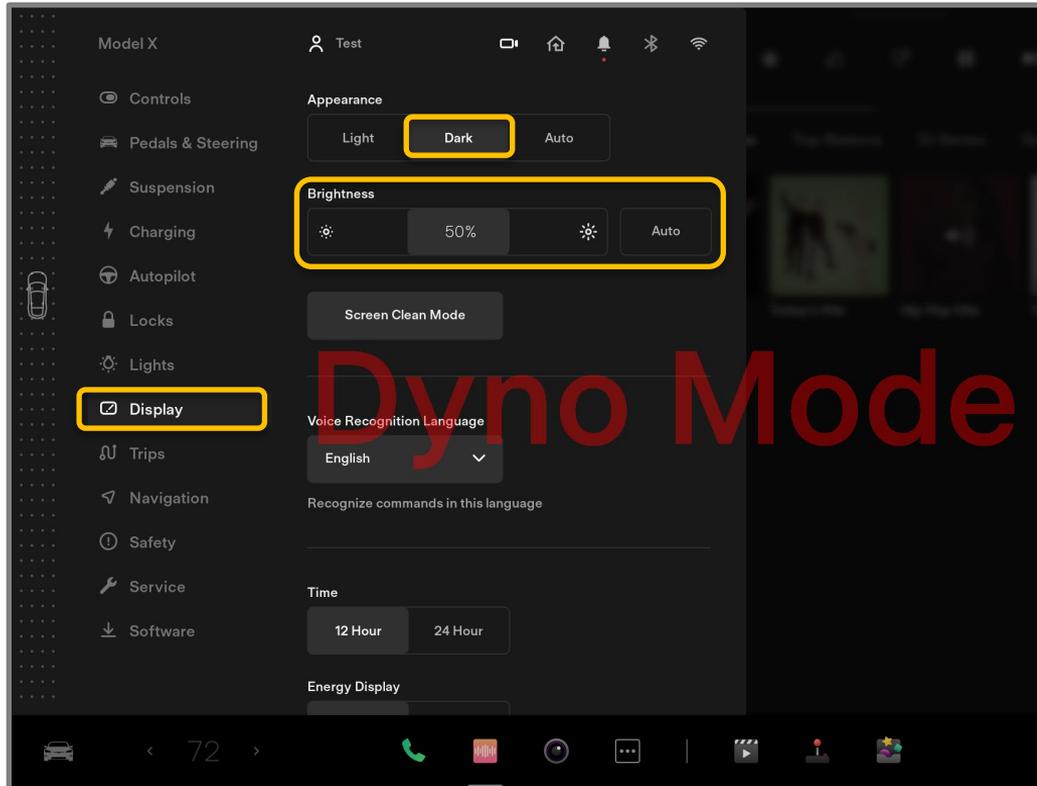

Settings

- **Appearance**
 - Dark
- **Brightness**
 - 50% with AUTO OFF


Trips

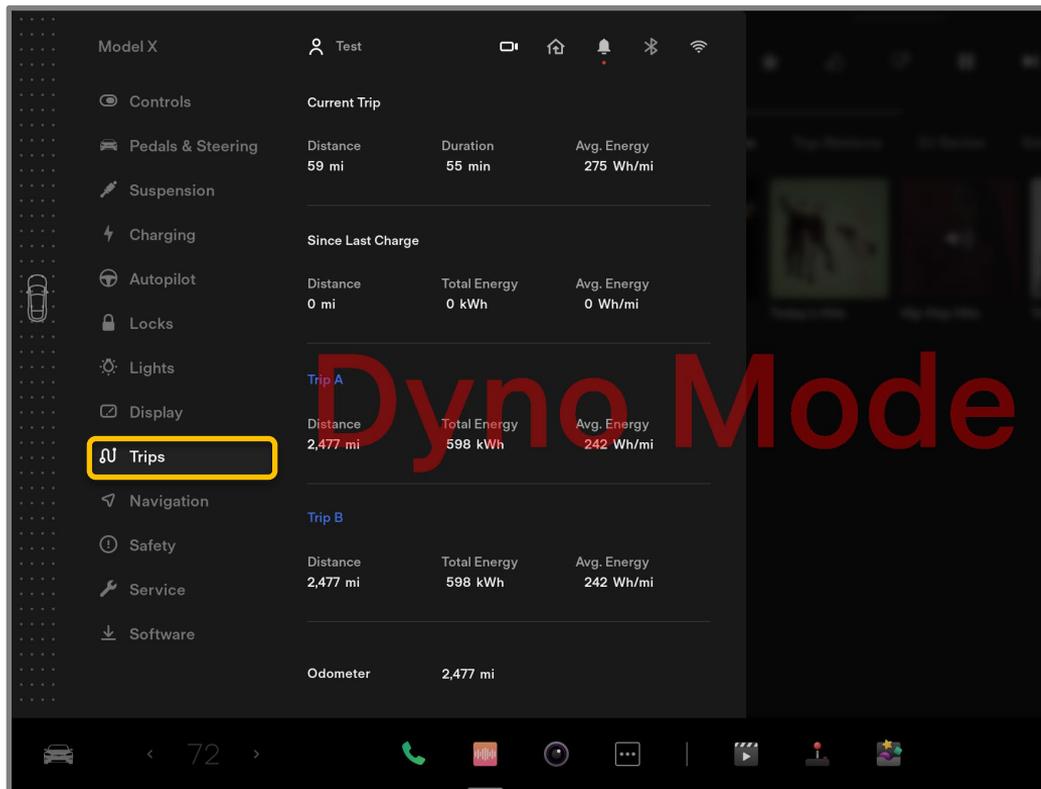

Settings

- No changes needed in Trips


Navigation

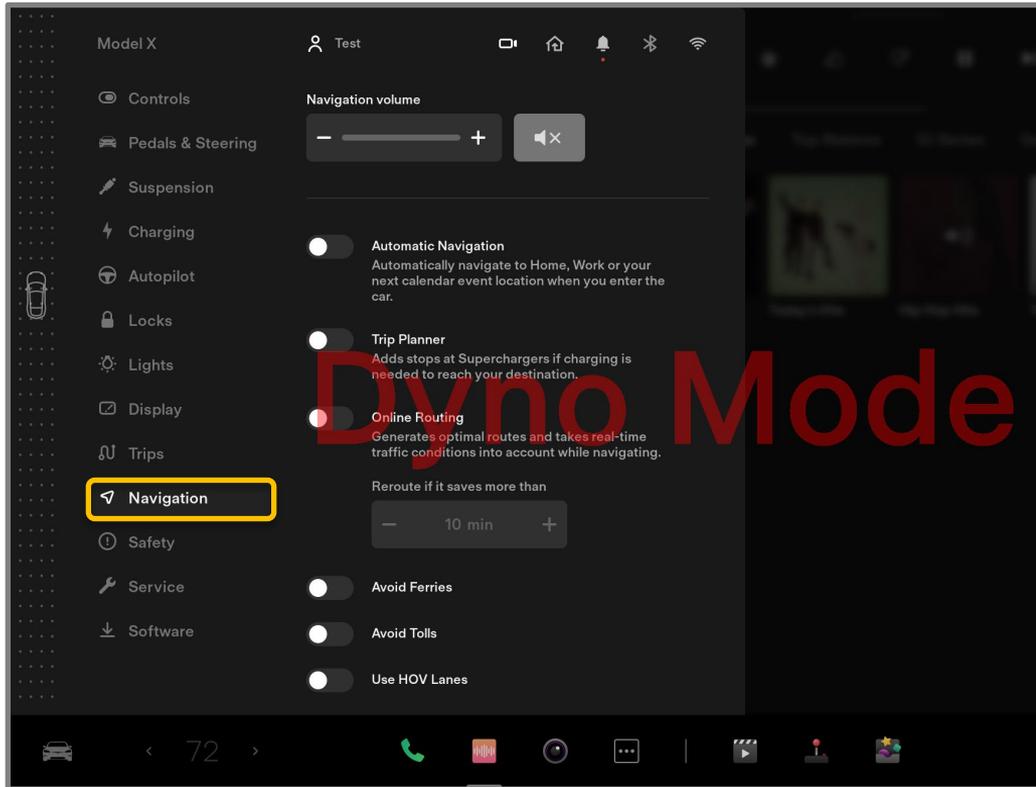

Settings

- **Navigation Volume**
 - Off
- **Automatic Navigation**
 - Off
- **Trip Planner**
 - Off
- **Online Routing**
 - Off
- **Avoid Ferries**
 - Off
- **Avoid Tolls**
 - Off
- **Use HOV Lanes**
 - Off


Safety

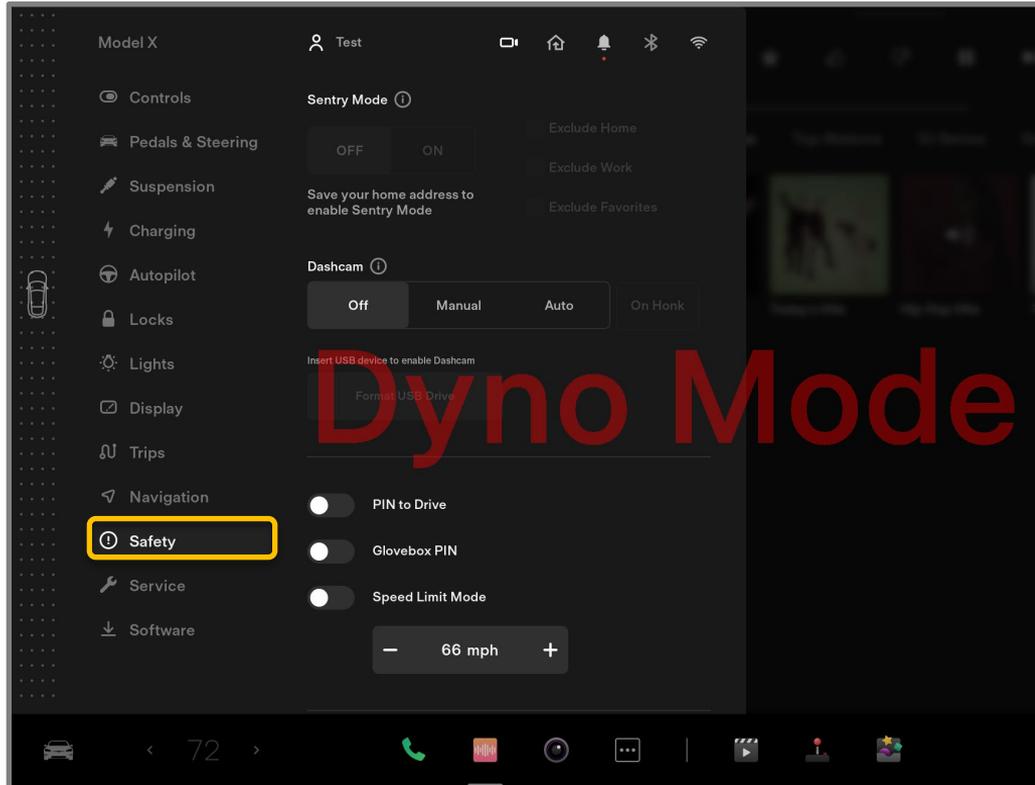

Settings

- **Sentry Mode**
 - Off
- **Dashcam**
 - Off
- **PIN to Drive**
 - Off
- **Glovebox PIN**
 - Off
- **Speed Limit Mode**
 - Off
 - During the constant speed section of MCT, speed limit should be turn ON and set to 66mph. PIN to enable this is 0000


Safety

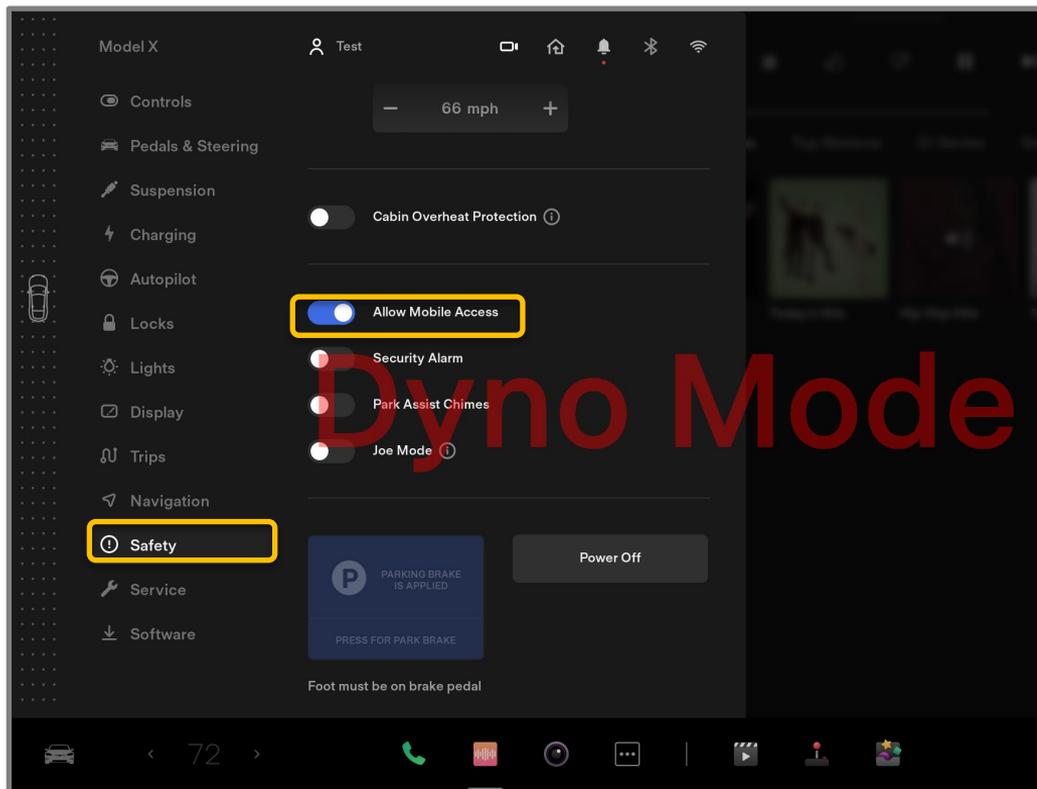

Settings

- **Cabin Overheat Protection**
 - Off
- **Allow Mobile Access**
 - ON
- **Security Alarm**
 - Off
- **Park Assist Chimes**
 - Off
- **Joe Mode**
 - Off

Service

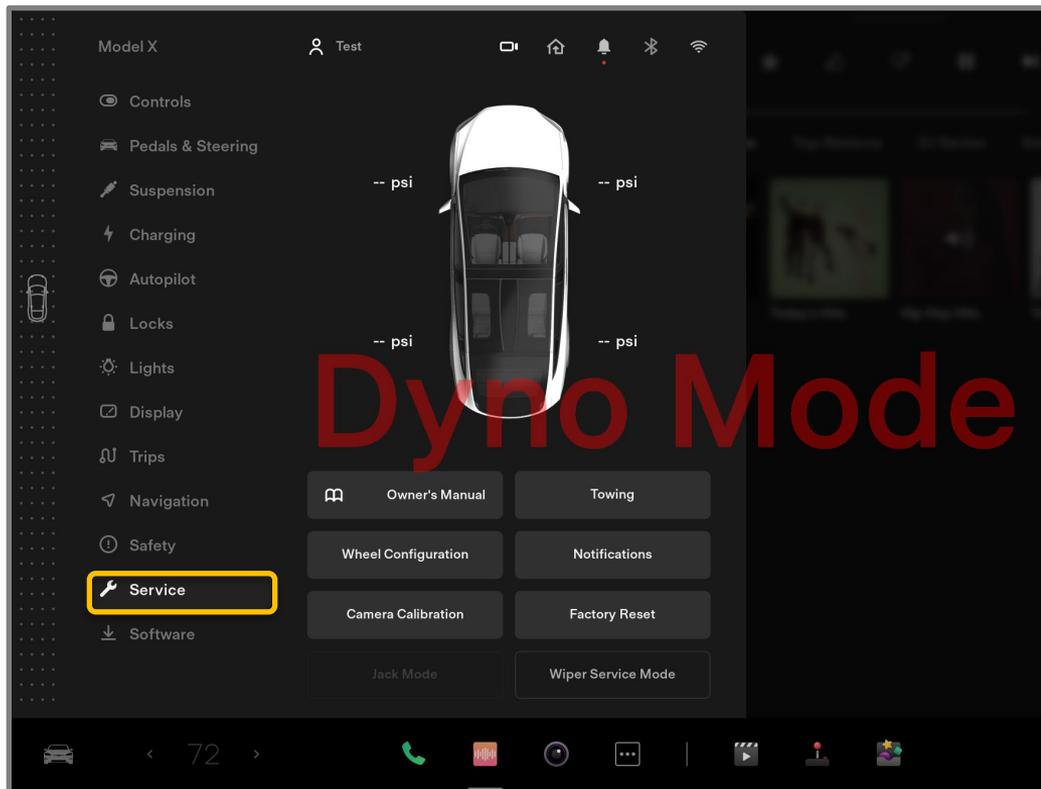

Settings


- **No changes needed in Service**

External Current Measurement 2021 Model X




Requirements

- 1 Hioki current probe (or similar instrument with high enough accuracy)
 - Minimum current rating of 500-amp clamps. 1000 amp is preferred. If a 500amp clamp is used, caution will need to be taken during the initial acceleration for CSS of MCT. A gradual acceleration will need to be done. Example: Taking 20 seconds to accelerate to 65mph.
 - Hioki current probes should be zeroed out before installation
- Power Analyzer
- **The current clamp should be installed before putting the vehicle on the dyno.**

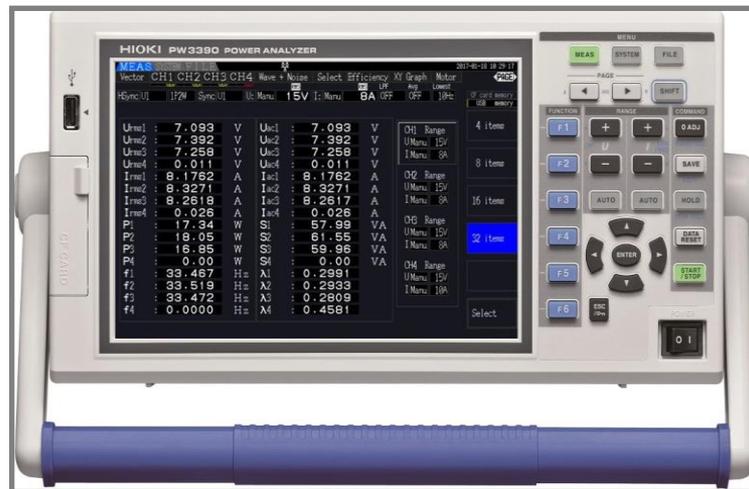


Raising the Vehicle

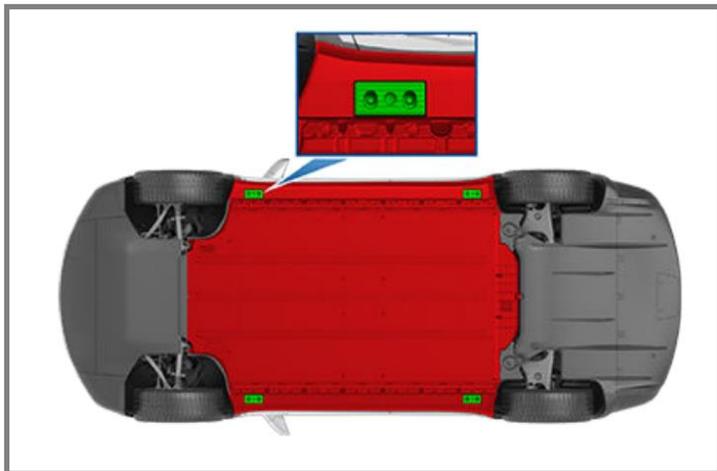


- Model X equipped with air suspension that automatically self-levels, even when power is off. To prevent damage when jacking or lifting the vehicle, you must activate **Jack Mode** to disable self-leveling.

Jacking Procedure

- Position Model X centrally between the lift posts.
- Using the touchscreen, raise the suspension to Very High. This is done by navigating to Controls>Suspension>Ride Height. Press the brake pedal and verify all doors and the liftgate are closed. Then press the Very High icon.
- Position the lift arm pads under the designated body lift points at the locations shown.

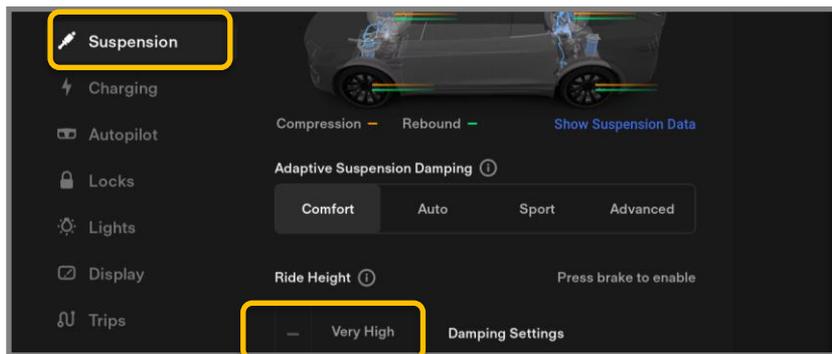

Raising the Vehicle: Jack Mode

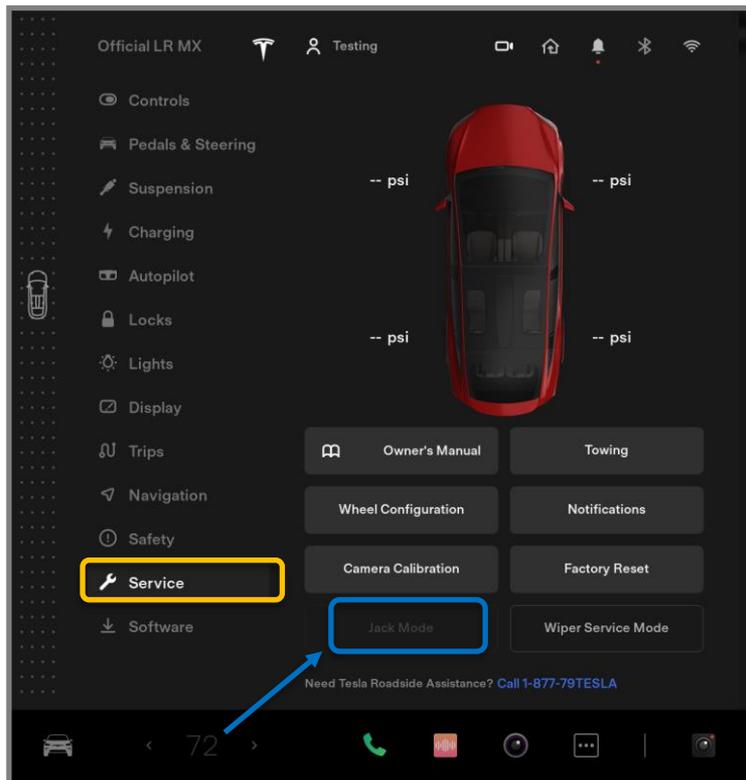

1. Once the lift pads are placed in the correct position under the vehicle, use the touchscreen to enable Jack Mode.
 - Menu>Service>Jack Mode
 - When done successfully, the Jack Mode icon will turn blue.
2. Now the vehicle can be lifted in the air to access the lower current clamp contact location.

Current Clamp Install



Removing the HV Cover

- Under the vehicle is a cover for access to a modified HV cable.
- The cover is secured with 4 Phillip head screws. Those 4 screws can be removed now.
- Hold on to these screws. If lost, spares are placed in the center console. Size is M5x65mm



Current Clamp Install



Current Clamp

- Using caution, install the current clamp over the modified HV cable.

Current Clamp Install



Current Clamp Install

- With the cover in hand, install it over the current clamp. The clamp's leads should be routed out of case facing the driver's side.
- Using the 4 Phillip head screws, install all screws hand tight into the vehicle's battery.



Current Clamp Install



Current Probe Lead Routing

- Use duct tape to secure the current probe leads to the battery case. The lead should be positioned wherever accessible to the dyno operator and later connected to a power analyzer.

Current Clamp Install



- Once the clamp is installed, the vehicle can be lowered and removed from the lift.
- Jack Mode can now be disabled from the touchscreen.
- Use caution when driving the vehicle. The vehicle should be left in very high unless the vehicle is on the dyno.

Certification Summary Information Report

Test Group		MTSLV00.0L2X			Evaporative/Refueling Family		--				
Models Covered by this Certificate											
Carline Manufacturer	Division	Carline	Certification Region Code(s)	Drive System	Trans - Type	- # of Gears	Trans - Lockup				
Tesla, Inc.	1 - Tesla Motors	78 - Model X Performance (20" Wheels)	California + CAA Section 177 states	All Wheel Drive	Automatic	1	No				
Tesla, Inc.	1 - Tesla Motors	79 - Model X Performance (22" Wheels)	Federal	All Wheel Drive	Automatic	1	No				
Tesla, Inc.	1 - Tesla Motors	75 - Model X Long Range Plus	California + CAA Section 177 states	All Wheel Drive	Automatic	1	No				
Tesla, Inc.	1 - Tesla Motors	73 - Model X Long Range	California + CAA Section 177 states	All Wheel Drive	Automatic	1	No				
Tesla, Inc.	1 - Tesla Motors	75 - Model X Long Range Plus	Federal	All Wheel Drive	Automatic	1	No				
Tesla, Inc.	1 - Tesla Motors	73 - Model X Long Range	Federal	All Wheel Drive	Automatic	1	No				
Tesla, Inc.	1 - Tesla Motors	79 - Model X Performance (22" Wheels)	California + CAA Section 177 states	All Wheel Drive	Automatic	1	No				
Tesla, Inc.	1 - Tesla Motors	78 - Model X Performance (20" Wheels)	Federal	All Wheel Drive	Automatic	1	No				
Engine Description											
Hybrid Type		--			Hybrid Description		--				
Engine Type		--			Mfr Engine Description		--				
Engine Block Arrangement		--			Mfr Engine Block Arrangement Description		--				
Camless Valvetrain Indicator		--			Oil Viscosity/Classification		--				
Number of Cylinders/Rotors		--			Mechanically Variable Compression Ratio Indicator		--				
After Treatment Device(s) (ATD)											
Mfr After Treatment Device (ATD) Comments		--									
Direct Ozone Reduction (DOR) Device		--									
Mfr Emission Control Device Comments		--									
Official Test Numbers											
Test Group	Fuel	FTP	US06	SC03	Cold CO	Highway	EPA City Litmus Value	EPA City Litmus Threshold	EPA Highway Litmus Value	EPA Highway Litmus Threshold	CREE Weighting Factor
Electricity		--	--	--	--	--	--	--	--	--	--

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Official Charge Depleting Test Numbers			
Test Group Fuel	UDDS	Highway	
Electricity	MTSL10066752	MTSL10066753	
Electricity	MTSL10066829	MTSL10066830	
Electricity	MTSL10071388	MTSL10071389	
Electricity	MTSL10066827	MTSL10066828	
Hybrid Electric Vehicle And Fuel Cell Information			
Rechargeable Energy Storage System	Battery(s)	Rechargeable Energy Storage System, if Other	--
Battery Type	Lithium Ion	Number of Battery Packs	1
Total Voltage of Battery Packs	360	Battery Energy Capacity	305
Battery Specific Energy	165	Battery Charger Type	On-Board
Number of Capacitors	--	Capacitor Rating (In Farads)	--
Mfr Capacitor Comments	--		
Hydraulic System Description	--		
Regenerative Braking Type	Electrical Regen Brake		
Regenerative Braking Source	Both	Driver Controlled Regenerative Braking	No
Mfr Regenerative Braking Description	--		
Drive Motor(s)/Generator(s)	6		
Motor/Generator Type 1	AC Permanent Magnet	Rated Motor/Generator Power	151
Motor/Generator Type 2	AC Permanent Magnet	Rated Motor/Generator Power	248
Motor/Generator Type 3	AC Induction	Rated Motor/Generator Power	189
Motor/Generator Type 4	AC Permanent Magnet	Rated Motor/Generator Power	243
Motor/Generator Type 5	AC Induction	Rated Motor/Generator Power	273
Motor/Generator Type 6	AC Permanent Magnet	Rated Motor/Generator Power	180
Mfr Fuel Cell Description	--		
Fuel Cell On-Board H2 Storage Capacity (kg)	--	Usable H2 Fill Capacity (kg)	--
Mfr Hybrid Electric/ Electric Vehicle Comments	4 carlines (Long Range Plus, Performance (20" Wheels), Performance (22" Wheels), Long Range) are available for 2021 MY Model X vehicles.		

Certification Summary Information Report

Test Group	MTSLV00.0L2X		Evaporative/Refueling Family	--							
Emission Data Vehicle Information											
Vehicle ID / Configuration	XD221-273717 / 0		Manufacturer Vehicle Configuration Number	0							
Original Test Group Name	MTSLV00.0L2X		Original Evaporative/Refueling Family	--							
Original Test Vehicle Model Year	2021										
Vehicle Model											
Represented Test Vehicle Make	Tesla		Represented Test Vehicle Model	Model X Long Range Plus							
Leak Family Details											
Leak Family Identifier	--		Leak Family Name	--							
Drive Sources and Fuel System Details											
<table border="1"> <thead> <tr> <th>Drive Source and Fuel#</th> <th>Drive Source</th> <th>Fuel</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Electric Motor</td> <td>Electricity</td> </tr> </tbody> </table>						Drive Source and Fuel#	Drive Source	Fuel	1	Electric Motor	Electricity
Drive Source and Fuel#	Drive Source	Fuel									
1	Electric Motor	Electricity									
Hybrid Indicator	No		Multiple Fuel Combustion	--							
Multiple Fuel Storage	--		Rechargeable Energy Storage System Indicator	Yes							
Fuel Cell Indicator	No		Rechargeable Energy Storage System, if 'Other'	--							
Rechargeable Energy Storage System	Battery(s)		Odometer Correction Factor	1							
Off-board charge Capable Indicator	Yes		Odometer Correction Sign	- = System Miles is equal to (Test odometer reading - Initial system miles) * Correction factor							
Odometer Correction -- Initial	1		Odometer Correction Units	Miles							
Engine Code	L2X		Rated Horsepower	496							
Displacement (liters)	0.001		Air Aspiration Method, if 'Other'	--							
Air Aspiration Method	Naturally Aspirated		Air Aspiration Device Configuration	--							
Number of Air Aspiration Devices	--		Drive Mode While Testing	4-Wheel Drive							
Charge Air Cooler Type	--		Aged Emission Components	4,000 (mi)							
Shift Indicator Light Usage	Not equipped		Equivalent Test Weight (pounds)	5500							
Curb Weight (lbs)	5437		N/V Ratio	9.7							
GVWR (lbs)	6788		# of Transmission Gears	1							
Axle Ratio	9.34		Creeper Gear	No							
Transmission Type	Direct Drive										
Transmission Lockup	No										
Dynamometer Coefficients:											
Target Coefficients			Set Coefficients			EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients					
Coefficient Category	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)	C (lbf/mph**2)					
City/Highway/Evap	29.04	0.605	0.0132	-13.31	0.3394	0.0129	12.3				
Cold CO	31.95	0.6655	0.0145	-24.39	0.2449	0.0154	N/A				

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Emission Control Device Comments	No emissions control Device - Pure Electric Vehicle		
Manufacturer Test Vehicle Comments	This is a Long Range Plus configuration vehicle Rated HP - 493 combined front/rear motor Individual HP is 242HP Front / 254 HP Rear Axle Ratio Front Motor 9.34 Rear Motor 9.73		
Test #	MTSL10066748	Test Procedure	2 - CVS 75 and later (w/o can. load)
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/12/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	3526	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	2.1138	--
DT-EER (Drive Trace Energy Economy Rating)	2.6012	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	3.5007	--
MFR FE (Manufacturer Fuel Economy)	20.4207	165.0286229
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0

Manufacturer Test Comments

Internal Test results (CVS-75 UDDS Ambient) for MY2021 Model X Long Range Plus. AC wh/mi @ 50 % SOC - Bag 1 - 222.89; Bag 2- 188.49; Bag 3 - 217.47; Bag 4 - 188.97; Test Start Odometer Reading 3526 Test Start Propulsion System Mileage 1267

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066749	Test Procedure	3 - HWFE
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/12/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	3526	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
DT-ASCR (Drive Trace Absolute Speed Change Rating)	7.0206	--
DT-EER (Drive Trace Energy Economy Rating)	2.7968	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	8.9101	--
MFR FE (Manufacturer Fuel Economy)	21.1287	159.4986914
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0

Manufacturer Test Comments

Internal Test results (HWY 3) for MY2021 Model X Long Range Plus. The HFET result from the full discharge MCT is used for the 2-part and 5-part calculations. AC wh/mi - 211.29; Test Start Odometer Reading 3526 Test Start Propulsion System Mileage 1267

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066750	Test Procedure	90 - US06
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/12/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	3526	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.2797	--
DT-EER (Drive Trace Energy Economy Rating)	0.3872	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	1.826	--
MFR FE (Manufacturer Fuel Economy)	31.1901	108.0471047
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Manufacturer Test Comments

Internal Test results (US 06) for MY2021 Model X Long Range Plus. US 06 AC wh/mi @ 50% SOC - City:311.90; Hwy:276.78. Test Start Odometer Reading 3526 Test Start Propulsion System Mileage 1267

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066751	Test Procedure	95 - SC03
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/12/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	3526	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.1055	--
DT-EER (Drive Trace Energy Economy Rating)	-0.3045	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	-0.046	--
MFR FE (Manufacturer Fuel Economy)	26.8847	125.3501062
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Manufacturer Test Comments

Internal Test results (SC 03) for MY2021 Model X Long Range Plus. AC wh/mi - 268.85 at 50% SOC. Test Start Odometer Reading 3526 Test Start Propulsion System Mileage 1267

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066752	Test Procedure	81 - Charge Depleting UDDS
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/12/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	3526	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	118.418
Charge Depleting Range (Calculated miles)	508	Charge Depleting Range (Actual miles)	508
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	508		
Number of Charge Depleting Bags/Phases Conducted	4	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	2.8079	
5	Drive Trace Energy Economy Rating	2.7618	
6	Drive Trace Inertia Work Ratio Rating	4.388	
7	Manufacturer Fuel Economy	144.51	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	103.669	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2021 Model X Long Range Plus. Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC 103669 wh (system gave error limited to 4 digits). MCT dc wh/mi is attached with EPA application. Added NMOG Test results. Test Start Odometer Reading 3526; Test Start Propulsion System Mileage 1267		

Certification Summary Information Report

Test Group		MTSLV00.0L2X				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	--	1	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	--	1	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066753	Test Procedure	84 - Charge Depleting Highway
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/12/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	3526	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	118.418
Charge Depleting Range (Calculated miles)	473	Charge Depleting Range (Actual miles)	473
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	473		
Number of Charge Depleting Bags/Phases Conducted	2	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	5.9456	
5	Drive Trace Energy Economy Rating	2.2041	
6	Drive Trace Inertia Work Ratio Rating	7.2516	
7	Manufacturer Fuel Economy	134.72	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	103.669	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2021 Model X Long Range Plus. Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC - 103669 wh (System error limited to 4 digits). MCT dc wh/mi is attached with application. Test Start Odometer Reading 3526; Test Start Propulsion System Mileage 1267		

Certification Summary Information Report

Test Group		MTSLV00.0L2X				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066754	Test Procedure	86 - Charge Depleting 20 Degree F FTP
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/12/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	3526	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	112.035
Charge Depleting Range (Calculated miles)	327	Charge Depleting Range (Actual miles)	327
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	327		
Number of Charge Depleting Bags/Phases Conducted	44	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	0.657	
5	Drive Trace Energy Economy Rating	0.529	
6	Drive Trace Inertia Work Ratio Rating	1.254	
7	Manufacturer Fuel Economy	29.9789	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	98.081	
13	System Start State of Charge Watt-hours	0	

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Manufacturer Test Comments	Internal Test results(Cold UDDS) for MY2021 Model X Long Range Plus. END SOC is 98081 wh (System error limited to 4 digits) for full discharge. AC wh/mi - Bag 1 - 551.79; Bag 2 - 570.36; Bag 3 - 420.34; Bag - 4- 397.61; Tesla did not use external current measurement after the full cold discharge test, since AC energy is not used in any part of the 5-cycle consumption calculation. The stated recharge energy is an estimate using the DC energy from the cold discharge test and the round trip energy efficiency from the full discharge MCT. Test Start Odometer Reading 3526 Test Start Propulsion System Mileage 1267		

Certification Summary Information Report

Test Group	MTSLV00.0L2X		Evaporative/Refueling Family	--							
Emission Data Vehicle Information											
Vehicle ID / Configuration	XD221-277722 / 0		Manufacturer Vehicle Configuration Number	0							
Original Test Group Name	MTSLV00.0L2X		Original Evaporative/Refueling Family	--							
Original Test Vehicle Model Year	2021										
Vehicle Model											
Represented Test Vehicle Make	Tesla		Represented Test Vehicle Model	Model X Performance (20" Wheels)							
Leak Family Details											
Leak Family Identifier	--		Leak Family Name	--							
Drive Sources and Fuel System Details											
<table border="1"> <thead> <tr> <th>Drive Source and Fuel#</th> <th>Drive Source</th> <th>Fuel</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Electric Motor</td> <td>Electricity</td> </tr> </tbody> </table>						Drive Source and Fuel#	Drive Source	Fuel	1	Electric Motor	Electricity
Drive Source and Fuel#	Drive Source	Fuel									
1	Electric Motor	Electricity									
Hybrid Indicator	No		Multiple Fuel Combustion	--							
Multiple Fuel Storage	--		Rechargeable Energy Storage System Indicator	Yes							
Fuel Cell Indicator	No		Rechargeable Energy Storage System, if 'Other'	--							
Rechargeable Energy Storage System	Battery(s)										
Off-board charge Capable Indicator	Yes		Odometer Correction Factor	1							
Odometer Correction -- Initial	1										
Odometer Correction Sign	- = System Miles is equal to (Test odometer reading - Initial system miles) * Correction factor										
Odometer Correction Units	Miles										
Engine Code	L2X		Rated Horsepower	568							
Displacement (liters)	0.001		Air Aspiration Method, if 'Other'								
Air Aspiration Method	Naturally Aspirated		Air Aspiration Device Configuration	--							
Number of Air Aspiration Devices	--		Drive Mode While Testing	4-Wheel Drive							
Charge Air Cooler Type	--		Aged Emission Components	4,000 (mi)							
Shift Indicator Light Usage	Not equipped		Equivalent Test Weight (pounds)	6000							
Curb Weight (lbs)	5498		N/V Ratio	9.7							
GVWR (lbs)	6878										
Axle Ratio	9.34		# of Transmission Gears	1							
Transmission Type	Direct Drive		Creeper Gear	No							
Transmission Lockup	No										
Dynamometer Coefficients:											
Target Coefficients			Set Coefficients								
Coefficient Category	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients				
City/Highway/Evap	35.47	0.5249	0.0147	-11.77	0.2902	0.0146	13.1				
Emission Control Device Comments						No emissions control Device - Pure Electric Vehicle					

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Manufacturer Test Vehicle Comments	This is a Performance (20" Wheels) configuration vehicle Rated HP - 568 combined front/rear motor Individual HP is 203 HP Front / 365 HP Rear Axle Ratio Front Motor 9.34 Rear Motor 9.73		

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066827	Test Procedure	81 - Charge Depleting UDDS
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/05/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1233	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	117.876
Charge Depleting Range (Calculated miles)	468	Charge Depleting Range (Actual miles)	468
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	468		
Number of Charge Depleting Bags/Phases Conducted	4	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	0.4555	
5	Drive Trace Energy Economy Rating	0.0937	
6	Drive Trace Inertia Work Ratio Rating	0.6896	
7	Manufacturer Fuel Economy	133.77	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	102.829	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2021 Model X Performance (20" Wheels). Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC 102829 wh (system gave error limited to 4 digits). MCT dc wh/mi is attached with EPA application. Added NMOG Test results. Test Start Odometer Reading 2737 Test Start Propulsion System Mileage 1233		

Certification Summary Information Report

Test Group		MTSLV00.0L2X				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	--	1	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	--	1	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066828	Test Procedure	84 - Charge Depleting Highway
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/05/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1233	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

PHEV/EV Charge Depleting Test Information

Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	117.876
Charge Depleting Range (Calculated miles)	447	Charge Depleting Range (Actual miles)	447
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	447		
Number of Charge Depleting Bags/Phases Conducted	2	Transition Bag/Phase Number	--

Charge Depleting Bag/Phase

Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result
1	Carbon Monoxide	0
2	Carbon dioxide	0
3	Carbon-Related Exhaust Emissions	0
4	Drive Trace Absolute Speed Change Rating	2.7883
5	Drive Trace Energy Economy Rating	0.4681
6	Drive Trace Inertia Work Ratio Rating	3.3632
7	Manufacturer Fuel Economy	127.72
8	Nitrogen Oxide	0
9	Non-methane organic gases	0
10	Non-methane organic gases plus Nitrogen Oxides	999.999
11	Particulate Matter	0
12	System End State of Charge Watt-hours	102.829
13	System Start State of Charge Watt-hours	0

Manufacturer Test Comments

Internal Test results for MY2021 Model X Performance (20" Wheels). Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC - 102829 wh (System error limited to 4 digits). MCT dc wh/mi is attached with application. Test Start Odometer Reading 2737 Test Start Propulsion System Mileage 1233

Certification Summary Information Report

Test Group		MTSLV00.0L2X				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	MTSLV00.0L2X		Evaporative/Refueling Family	--							
Emission Data Vehicle Information											
Vehicle ID / Configuration	XD221-277722 / 1		Manufacturer Vehicle Configuration Number	0							
Original Test Group Name	MTSLV00.0L2X		Original Evaporative/Refueling Family	--							
Original Test Vehicle Model Year	2021										
Vehicle Model											
Represented Test Vehicle Make	Tesla		Represented Test Vehicle Model	Model X Performance (22" Wheels)							
Leak Family Details											
Leak Family Identifier	--		Leak Family Name	--							
Drive Sources and Fuel System Details											
<table border="1"> <thead> <tr> <th>Drive Source and Fuel#</th> <th>Drive Source</th> <th>Fuel</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Electric Motor</td> <td>Electricity</td> </tr> </tbody> </table>						Drive Source and Fuel#	Drive Source	Fuel	1	Electric Motor	Electricity
Drive Source and Fuel#	Drive Source	Fuel									
1	Electric Motor	Electricity									
Hybrid Indicator	No		Multiple Fuel Combustion	--							
Multiple Fuel Storage	--		Rechargeable Energy Storage System Indicator	Yes							
Fuel Cell Indicator	No		Rechargeable Energy Storage System, if 'Other'	--							
Rechargeable Energy Storage System	Battery(s)										
Off-board charge Capable Indicator	Yes		Odometer Correction Factor	1							
Odometer Correction -- Initial	1										
Odometer Correction Sign	- = System Miles is equal to (Test odometer reading - Initial system miles) * Correction factor										
Odometer Correction Units	Miles										
Engine Code	L2X		Rated Horsepower	568							
Displacement (liters)	0.001										
Air Aspiration Method	Naturally Aspirated		Air Aspiration Method, if 'Other'								
Number of Air Aspiration Devices	--		Air Aspiration Device Configuration	--							
Charge Air Cooler Type	--		Drive Mode While Testing	4-Wheel Drive							
Shift Indicator Light Usage	Not equipped		Aged Emission Components	4,000 (mi)							
Curb Weight (lbs)	5498		Equivalent Test Weight (pounds)	6000							
GVWR (lbs)	6878		N/V Ratio	9.7							
Axle Ratio	9.34										
Transmission Type	Direct Drive		# of Transmission Gears	1							
Transmission Lockup	No		Creeper Gear	No							
Dynamometer Coefficients:											
Target Coefficients			Set Coefficients			EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients					
Coefficient Category	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)		C (lbf/mph**2)				
City/Highway/Evap	49.03	0.4107	0.0182	-7.91	0.0388		0.0186				
Cold CO	53.94	0.4517	0.02	-16.81	-0.1592	0.021	N/A				

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Emission Control Device Comments	No emissions control Device - Pure Electric Vehicle		
Manufacturer Test Vehicle Comments	This is a Performance (22" Wheels) configuration vehicle Rated HP - 568 combined front/rear motor Individual HP is 203 HP Front / 365 HP Rear Axle Ratio Front Motor 9.34 Rear Motor 9.73		
Test #	MTSL10066831	Test Procedure	2 - CVS 75 and later (w/o can. load)
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/07/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1704	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.567	--
DT-EER (Drive Trace Energy Economy Rating)	0.0615	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	0.8643	--
MFR FE (Manufacturer Fuel Economy)	24.7586	136.1143199
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0

Manufacturer Test Comments

Internal Test results (CVS-75 UDDS Ambient) for MY2021 Model X Performance (22" Wheels). AC wh/mi @ 50 % SOC - Bag 1 - 284.56; Bag 2 - 242.80; Bag 3 - 274.29; Bag 4 - 240.71; Test Start Odometer Reading 3208 Test Start Propulsion System Mileage 1704

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066835	Test Procedure	3 - HWFE
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/07/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1704	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
DT-ASCR (Drive Trace Absolute Speed Change Rating)	2.9216	--
DT-EER (Drive Trace Energy Economy Rating)	0.6115	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	3.4108	--
MFR FE (Manufacturer Fuel Economy)	26.2972	128.1505255
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0

Manufacturer Test Comments

Internal Test results (HWY 3) for MY2021 Model X Performance (22" Wheels). The HFET result from the full discharge MCT is used for the 2-part and 5-part calculations. AC wh/mi - 262.97; Test Start Odometer Reading 3208 Test Start Propulsion System Mileage 1704

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066833	Test Procedure	90 - US06
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/07/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1704	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.4505	--
DT-EER (Drive Trace Energy Economy Rating)	-0.2125	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	1.568	--
MFR FE (Manufacturer Fuel Economy)	39.2541	85.8509047
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Manufacturer Test Comments

Internal Test results (US 06) for MY2021 Model X Performance (22" Wheels). US 06 AC wh/mi @ 50% SOC - City:392.54; Hwy:341.35. Test Start Odometer Reading 3208 Test Start Propulsion System Mileage 1704

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066834	Test Procedure	95 - SC03
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/07/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1704	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	-0.5409	--
DT-EER (Drive Trace Energy Economy Rating)	-1.0362	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	-0.0866	--
MFR FE (Manufacturer Fuel Economy)	30.6123	110.0864685
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Manufacturer Test Comments

Internal Test results (SC 03) for MY2021 Model X Performance (22" Wheels). AC wh/mi - 306.12 at 50% SOC. Test Start Odometer Reading 3208
Test Start Propulsion System Mileage 1704

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066829	Test Procedure	81 - Charge Depleting UDDS
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/07/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1704	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	117.762
Charge Depleting Range (Calculated miles)	416	Charge Depleting Range (Actual miles)	416
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	416		
Number of Charge Depleting Bags/Phases Conducted	4	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	-1.1665	
5	Drive Trace Energy Economy Rating	-1.0526	
6	Drive Trace Inertia Work Ratio Rating	-1.6314	
7	Manufacturer Fuel Economy	119.03	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	102.957	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2021 Model X Performance (22" Wheels). Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC 102957 wh (system gave error limited to 4 digits). MCT dc wh/mi is attached with EPA application. Added NMOG Test results. Test Start Odometer Reading 3208 Test Start Propulsion System Mileage 1704		

Certification Summary Information Report

Test Group		MTSLV00.0L2X				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	--	1	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	--	1	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066830	Test Procedure	84 - Charge Depleting Highway
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/07/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1704	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	117.762
Charge Depleting Range (Calculated miles)	389	Charge Depleting Range (Actual miles)	389
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	389		
Number of Charge Depleting Bags/Phases Conducted	2	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	-0.2136	
5	Drive Trace Energy Economy Rating	-0.0965	
6	Drive Trace Inertia Work Ratio Rating	-0.4672	
7	Manufacturer Fuel Economy	111.23	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	102.957	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2021 Model X Performance (22" Wheels). Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC - 102957 wh (System error limited to 4 digits). MCT dc wh/mi is attached with application. Test Start Odometer Reading 3208 Test Start Propulsion System Mileage 1704		

Certification Summary Information Report

Test Group		MTSLV00.0L2X				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10066832	Test Procedure	86 - Charge Depleting 20 Degree F FTP
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/07/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1704	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	112.668
Charge Depleting Range (Calculated miles)	275	Charge Depleting Range (Actual miles)	275
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	275		
Number of Charge Depleting Bags/Phases Conducted	37	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	0.071	
5	Drive Trace Energy Economy Rating	0.08	
6	Drive Trace Inertia Work Ratio Rating	0.373	
7	Manufacturer Fuel Economy	35.818	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	98.504	
13	System Start State of Charge Watt-hours	0	

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Manufacturer Test Comments	Internal Test results(Cold UDDS) for MY2021 Model X Performance (22" Wheels). END SOC is 98504 wh (System error limited to 4 digits) for full discharge. AC wh/mi - Bag 1 - 638.17; Bag 2 - 623.43; Bag 3 - 521.75; Bag - 4- 523.16; Tesla did not use external current measurement after the full cold discharge test, since AC energy is not used in any part of the 5-cycle consumption calculation. The stated recharge energy is an estimate using the DC energy from the cold discharge test and the round trip energy efficiency from the full discharge MCT. Test Start Odometer Reading 3208 Test Start Propulsion System Mileage 1704		

Certification Summary Information Report

Test Group	MTSLV00.0L2X		Evaporative/Refueling Family	--							
Emission Data Vehicle Information											
Vehicle ID / Configuration	XD321-325808 / 0		Manufacturer Vehicle Configuration Number	0							
Original Test Group Name	MTSLV00.0L2X		Original Evaporative/Refueling Family	--							
Original Test Vehicle Model Year	2021										
Vehicle Model											
Represented Test Vehicle Make	Tesla		Represented Test Vehicle Model	Model X Long Range							
Leak Family Details											
Leak Family Identifier	--		Leak Family Name	--							
Drive Sources and Fuel System Details											
<table border="1"> <thead> <tr> <th>Drive Source and Fuel#</th> <th>Drive Source</th> <th>Fuel</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Electric Motor</td> <td>Electricity</td> </tr> </tbody> </table>						Drive Source and Fuel#	Drive Source	Fuel	1	Electric Motor	Electricity
Drive Source and Fuel#	Drive Source	Fuel									
1	Electric Motor	Electricity									
Hybrid Indicator	No		Multiple Fuel Combustion	--							
Multiple Fuel Storage	--		Rechargeable Energy Storage System Indicator	Yes							
Fuel Cell Indicator	No		Rechargeable Energy Storage System, if 'Other'	--							
Rechargeable Energy Storage System	Battery(s)										
Off-board charge Capable Indicator	Yes		Odometer Correction Factor	1							
Odometer Correction -- Initial	1										
Odometer Correction Sign	- = System Miles is equal to (Test odometer reading - Initial system miles) * Correction factor										
Odometer Correction Units	Miles										
Engine Code	L2X		Rated Horsepower	658							
Displacement (liters)	0.001										
Air Aspiration Method	Naturally Aspirated		Air Aspiration Method, if 'Other'								
Number of Air Aspiration Devices	--		Air Aspiration Device Configuration	--							
Charge Air Cooler Type	--		Drive Mode While Testing	4-Wheel Drive							
Shift Indicator Light Usage	Not equipped		Aged Emission Components	4,000 (mi)							
Curb Weight (lbs)	5219		Equivalent Test Weight (pounds)	5500							
GVWR (lbs)	6250		N/V Ratio	102.7							
Axle Ratio	1										
Transmission Type	Direct Drive		# of Transmission Gears	1							
Transmission Lockup	No		Creeper Gear	No							
Dynamometer Coefficients:											
Target Coefficients			Set Coefficients								
Coefficient Category	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients				
City/Highway/Evap	33.56	0.4237	0.0168	-11.15	0.3165	0.0142	12.9				
Cold CO	36.92	0.466	0.0185	-19.53	0.1999	0.0169	N/A				

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Emission Control Device Comments	No emissions control Device - Pure Electric Vehicle		
Manufacturer Test Vehicle Comments	This is a Long Range configuration vehicle Individual HP is 244 kw Front / 248 kw Rear N/V Ratio F: 85.9 R: 102.7		
Test #	MTSL10071390	Test Procedure	2 - CVS 75 and later (w/o can. load)
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/24/2021	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	2736	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.1205	--
DT-EER (Drive Trace Energy Economy Rating)	-0.0104	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	0.7145	--
MFR FE (Manufacturer Fuel Economy)	20.2552	166.3770291
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0

Manufacturer Test Comments Internal Test results (CVS-75 UDDS Ambient) for MY2021 Model X Long Range. AC wh/mi @ 50 % SOC - Bag 1 - 229.1; Bag 2- 192.6; Bag 3 - 223.4; Bag 4 - 192.3;

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10071391	Test Procedure	3 - HWFE
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/24/2021	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	2736	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
DT-ASCR (Drive Trace Absolute Speed Change Rating)	2.0297	--
DT-EER (Drive Trace Energy Economy Rating)	1.0478	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	2.4	--
MFR FE (Manufacturer Fuel Economy)	22.3094	151.0574018
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0

Manufacturer Test Comments

Internal Test results (HWY 3) for MY2021 Model X Long Range. The HFET result from the full discharge MCT is used for the 2-part and 5-part calculations. AC wh/mi - 223.1

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10071393	Test Procedure	90 - US06
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/24/2021	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	2736	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	-1.0785	--
DT-EER (Drive Trace Energy Economy Rating)	-1.7193	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	-2.5882	--
MFR FE (Manufacturer Fuel Economy)	31.096	108.3740674
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Manufacturer Test Comments

Internal Test results (US 06) for MY2021 Model X Long Range. US 06 AC wh/mi @ 50% SOC - City: 311.0; Hwy: 295.9.

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10071394	Test Procedure	95 - SC03
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/24/2021	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	2736	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.3683	--
DT-EER (Drive Trace Energy Economy Rating)	0.0503	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	0.3506	--
MFR FE (Manufacturer Fuel Economy)	26.9993	124.8180508
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Manufacturer Test Comments

Internal Test results (SC 03) for MY2021 Model X Long Range. AC wh/mi - 270.0 at 50% SOC.

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10071388	Test Procedure	81 - Charge Depleting UDDS
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/24/2021	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	2736	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	114.97
Charge Depleting Range (Calculated miles)	494	Charge Depleting Range (Actual miles)	494
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	494		
Number of Charge Depleting Bags/Phases Conducted	4	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	1.6204	
5	Drive Trace Energy Economy Rating	1.7575	
6	Drive Trace Inertia Work Ratio Rating	3.0978	
7	Manufacturer Fuel Economy	144.69	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	99.976	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2021 Model X Long Range. Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC 99976 wh (system gave error limited to 4 digits). MCT dc wh/mi is attached with EPA application. Added NMOG Test results.		

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
-------------------	--------------	-------------------------------------	----

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	--	1	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	--	1	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10071389	Test Procedure	84 - Charge Depleting Highway
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/24/2021	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	2736	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	114.97
Charge Depleting Range (Calculated miles)	448	Charge Depleting Range (Actual miles)	448
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	448		
Number of Charge Depleting Bags/Phases Conducted	2	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	7.7847	
5	Drive Trace Energy Economy Rating	2.5663	
6	Drive Trace Inertia Work Ratio Rating	9.7335	
7	Manufacturer Fuel Economy	131.32	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	99.976	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2021 Model X Long Range. Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC - 99976 wh (System error limited to 4 digits). MCT dc wh/mi is attached with application.		

Certification Summary Information Report

Test Group		MTSLV00.0L2X				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Test #	MTSL10071392	Test Procedure	86 - Charge Depleting 20 Degree F FTP
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/24/2021	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	2736	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	106.166
Charge Depleting Range (Calculated miles)	320	Charge Depleting Range (Actual miles)	320
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	320		
Number of Charge Depleting Bags/Phases Conducted	43	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	0.991	
5	Drive Trace Energy Economy Rating	0.646	
6	Drive Trace Inertia Work Ratio Rating	1.925	
7	Manufacturer Fuel Economy	28.8245	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	92.32	
13	System Start State of Charge Watt-hours	0	

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Manufacturer Test Comments	Internal Test results(Cold UDDS) for MY2021 Model X Long Range. END SOC is 92320 wh (System error limited to 4 digits) for full discharge. AC wh/mi - Bag 1 - 447.7; Bag 2 - 386.6; Bag 3 - 352.4; Bag 4 - 364.7; Tesla did not use external current measurement after the full cold discharge test, since AC energy is not used in any part of the 5-cycle consumption calculation. The stated recharge energy is an estimate using the DC energy from the cold discharge test and the round trip energy efficiency from the full discharge MCT.		
Fuel Properties			

Certification Summary Information Report

Test Group		MTSLV00.0L2X			Evaporative/Refueling Family			--		
Consolidated List of Standards										
Exhaust Standards										
Cert Region		Federal			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			Federal Tier 3 Bin 0		
Fuel		Electricity			Test Procedure			Charge Depleting UDDS		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	1	--	0	
150,000 miles	CO-COMP	--	--	--	--	--	1	--	0	
150,000 miles	CREE	--	--	--	--	--	1	--	0	
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	1	--	0	
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			California ZEV		
Fuel		Electricity			Test Procedure			Charge Depleting UDDS		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0	
150,000 miles	CREE	--	--	--	--	--	--	0	0	
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0	
Cert Region		Federal			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			Federal Tier 3 Bin 0		
Fuel		Electricity			Test Procedure			CVS 75 and later (w/o can. load)		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	

Certification Summary Information Report

Test Group		MTSLV00.0L2X			Evaporative/Refueling Family			--		
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			California ZEV		
Fuel		Electricity			Test Procedure			CVS 75 and later (w/o can. load)		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	
Cert Region		Federal			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			Federal Tier 3 Bin 0		
Fuel		Electricity			Test Procedure			Charge Depleting Highway		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0	
150,000 miles	CREE	--	--	--	--	--	--	0	0	
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0	
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			California ZEV		
Fuel		Electricity			Test Procedure			Charge Depleting Highway		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0	
150,000 miles	CREE	--	--	--	--	--	--	0	0	
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0	

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Glossary			
Useful Life			
4	4,000 miles	120	120,000 miles
50	50,000 miles	150	150,000 miles
100	100,000 miles		
Emission Name			
HC-TOTAL	Total Hydrocarbon	METHANOL	CH3OH - Methanol
CO	Carbon Monoxide	N2O	Nitrous Oxide
CO2	Carbon dioxide	SPITBACK	Spitback Hydrocarbon in grams
CREE	Carbon-Related Exhaust Emissions	AMP-HRS	Integrated Amp-hours
OPT-CREE	Optional Carbon-Related Exhaust Emissions	START-SOC	System Start State of Charge Watt-hours
NOX	Nitrogen Oxide	END-SOC	System End State of Charge Watt-hours
PM	Particulate Matter	ACT-DISTANCE	Actual Distance Driven (miles)
PM-COMP	SFTP Composite Particulate Matter	AS-VOLT	Average System Voltage
HC-NM	Non-methane Hydrocarbon	CO2 BAG 1	Bag 1 Carbon Dioxide
OMHCE	Organic material Hydrocarbon Equivalent	CO2 BAG 2	Bag 2 Carbon Dioxide
OMNMHCE	Organic material non-methane HC equivalent	CO2 BAG 3	Bag 3 Carbon Dioxide
NMOG	Non-methane organic gases	CO2 BAG 4	Bag 4 Carbon Dioxide
HCHO	Formaldehyde	NMOG+NOX	Non-methane organic gases plus Nitrogen Oxides
H3C2HO	Acetaldehyde	NMOG+NOX-COMP	SFTP Composite Non-methane Organic Gases + Nitrogen Oxides
HC-NM+NOX	SFTP Non-methane Hydrocarbon + Nitrogen Oxides for US06 or SC03	DT-IWRR	Drive Trace Inertia Work Ratio Rating
HC-NM+NOX-COMP	SFTP Composite Non-methane Hydrocarbon + Nitrogen Oxides	DT-ASCR	Drive Trace Absolute Speed Change Rating
CO-COMP	SFTP Composite Carbon Monoxide	DT-EER	Drive Trace Energy Economy Rating
ETHANOL	C2H5OH - Ethanol	COMB-CREE	Combined Carbon-Related Exhaust Emissions
FE BAG 1	Bag 1 Fuel Economy	COMB-OPT-CREE	Combined Optional Carbon-Related Exhaust Emissions
FE BAG 2	Bag 2 Fuel Economy	HC-TOTAL-EQUIV	Total Hydrocarbon equivalent - Evap only
FE BAG 3	Bag 3 Fuel Economy	METHANE-COMB	Combined CH4 for HD 2b/3 vehicles only
FE BAG 4	Bag 4 Fuel Economy	N2O-COMB	Combined Nitrous Oxide for HD 2b/3 vehicles only
MFR FE	Manufacturer Fuel Economy	LEAK-DIA	Effective Leak Diameter (inches)
HC	Hydrocarbon for Running Loss and ORVR	LEAK-GAS CAP	Gas Cap Leakage (cc/min)
METHANE	CH4 - Methane	CO2-COMB	Combined Carbon Dioxide for HD 2b/3 Vehicles Only
Certification Region			
CA	California + CAA Section 177 states	FA	Federal
Exhaust Emission Standard Level			
B1	Federal Tier 2 Bin 1	L3ULEV340	California LEV-III ULEV340
B2	Federal Tier 2 Bin 2	L3ULEV250	California LEV-III ULEV250
B3	Federal Tier 2 Bin 3	L3ULEV200	California LEV-III ULEV200
B4	Federal Tier 2 Bin 4	L3SULEV170	California LEV-III SULEV170
B5	Federal Tier 2 Bin 5	L3SULEV150	California LEV-III SULEV150

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
B6	Federal Tier 2 Bin 6	L3LEV630	California LEV-III LEV630
B7	Federal Tier 2 Bin 7	L3ULEV570	California LEV-III ULEV570
B8	Federal Tier 2 Bin 8	L3ULEV400	California LEV-III ULEV400
B9	Federal Tier 2 Bin 9	L3ULEV270	California LEV-III ULEV270
B10	Federal Tier 2 Bin 10	L3SULEV230	California LEV-III SULEV230
B11	Federal Tier 2 Bin 11	L3SULEV200	California LEV-III SULEV200
HDV1	HDV1 (Federal HD chassis Class 2b GVW 8501-10000)	T3B160	Federal Tier 3 Bin 160
HDV2	HDV2 (Federal HD chassis Class 3 GVW 10001-14000)	T3B125	Federal Tier 3 Bin 125
L2	California LEV-II LEV	T3B110	Federal Tier 3 Transitional Bin 110
L2OP	California LEV-II LEV Optional	T3B85	Federal Tier 3 Transitional Bin 85
U2	California LEV-II ULEV	T3SULEV30	Federal Tier 3 Transitional LEV-II SULEV30 Carryover
S2	California LEV-II SULEV	T3B70	Federal Tier 3 Bin 70
ZEV	California ZEV	T3B50	Federal Tier 3 Bin 50
OT	Other	T3B30	Federal Tier 3 Bin 30
T1	Federal Tier 1	T3B20	Federal Tier 3 Bin 20
PZEV	California PZEV	T3B0	Federal Tier 3 Bin 0
L2LEV160	California LEV-II LEV160	HDV2B395	Federal Tier 3 HD Class 2b Transitional Bin 395
L2ULEV125	California LEV-II ULEV125	HDV2B340	Federal Tier 3 HD Class 2b Transitional Bin 340
L2SULEV30	California LEV-II SULEV30	HDV2B250	Federal Tier 3 HD Class 2b Bin 250
L2LEV395	California LEV-II LEV395	HDV2B200	Federal Tier 3 HD Class 2b Bin 200
L2ULEV340	California LEV-II ULEV340	HDV2B170	Federal Tier 3 HD Class 2b Bin 170
L2LEV630	California LEV-II LEV630	HDV2B150	Federal Tier 3 HD Class 2b Bin 150
L2ULEV570	California LEV-II ULEV570	HDV2B0	Federal Tier 3 HD Class 2b Bin 0
L3LEV160	California LEV-III LEV160	HDV3B630	Federal Tier 3 HD Class 3 Transitional Bin 630
L3ULEV125	California LEV-III ULEV125	HDV3B570	Federal Tier 3 HD Class 3 Transitional Bin 570
L3ULEV70	California LEV-III ULEV70	HDV3B400	Federal Tier 3 HD Class 3 Bin 400
L3ULEV50	California LEV-III ULEV50	HDV3B270	Federal Tier 3 HD Class 3 Bin 270
L3SULEV30	California LEV-III SULEV30	HDV3B230	Federal Tier 3 HD Class 3 Bin 230
L3SULEV20	California LEV-III SULEV20	HDV3B200	Federal Tier 3 HD Class 3 Bin 200
L3LEV395	California LEV-III LEV395	HDV3B0	Federal Tier 3 HD Class 3 Bin 0
Transmission Type Code			
AMS	Automated Manual- Selectable (e.g. Automated Manual with paddles)	M	Manual
A	Automatic	OT	Other
AM	Automated Manual	SA	Semi-Automatic
CVT	Continuously Variable	SCV	Selectable Continuously Variable (e.g. CVT with paddles)
Drive System Code			
4	4-Wheel Drive	P	Part-time 4-Wheel Drive
F	2-Wheel Drive, Front	A	All Wheel Drive
R	2-Wheel Drive, Rear		

Certification Summary Information Report

Test Group	MTSLV00.0L2X	Evaporative/Refueling Family	--
Additional Terms and Acronyms			
AFC	Alternative Fuel Converter	ICI	Independent Commercial Importer
CSI	Certificate Summary Information	ORVR	Onboard Refueling Vapor Recovery
DF	Deterioration Factor	SIL	Shift Indicator Light
Evap	Evaporation, Evaporative	Trans	Transmission

EPA EV Multicycle Calculator (SAE J1634 Oct 2012)

Manufacturer: Tesla Inc.
Carline: Model X Long Range
Model Year: 2021
Vehicle: XD321-325808
Test Number: Internal test #
Comments:
Lab: Tesla Lab - Fremont
Test Date: 8/24/2021

As used by EPA laboratory
 D.Good March 8, 2016

Cycle	Energy (Wh)	Distance (mi)	ECdc_cyc	Kuwgt	Kwgt	Recharge AC WattHrs
UDDS1	1684	7.440	226.30	56.57	3.81	
UDDS2	1552	7.436	208.67	52.17	68.38	114970
UDDS3	1475	7.451	197.97	49.49	64.88	
UDDS4	1487	7.442	199.83	49.96	65.49	
HWY1	2326	10.258	226.77	113.38		
HWY2	2252	10.255	219.63	109.81		
SS1	80451	290.081	277.34			
SS2	8748	31.768	275.38			
TOTAL	99975.78	372.131				

K-Factors	UDDS1	UDDS2	UDDS3	UDDS4	HWY1	HWY2
Unweighted	0.250	0.250	0.250	0.250	0.500	0.500
Weighted	0.017	0.328	0.328	0.328	NA	NA

Results	Range (mi)	AC Wh/mi	EPA version	
			MPGe	kWh/100mi
UDDSu	480.21	239.42		
UDDSw	493.55	232.94	144.6917	23.2943
HWY	447.93	256.67	131.3155	25.6672

Note:

1. Fill in yellow shaded areas to compute range and AC wh/mi results
2. Weighted results based on SAE J1634 calculations
3. Final values in green shaded area should be rounded to appropriate significant digits