



10/21/2021

Mr. Tristin Rojeck
Vehicle Programs and Compliance Division
Environmental Protection Agency
2000 Traverwood,
Ann Arbor, MI 48105

Subject: Request for issuance of a new COC - Initial application.

Tesla, Inc. requests that the EPA issue a Certificate of Conformity for the subject test group.

Attached to this request is the Part 1 Application. Tesla believes that the test group complies with all applicable regulations contained within Title 40 of the CFR, California Amendments to Subparts B, C, and S, Part 86 and Part 88, Title 40 of the CFR and Title 13 of the California Code of Regulations

Vehicle Category:	Light Duty Vehicle (< 8000 lbs. GVW)
Durability Group:	NTSLEEVNLL2Y
Test Group:	NTSLV00.0L2Y
Summary Sheet No:	NA
Durability Group Description:	NA
Durability Vehicle:	NA
OBD Group:	NA
Test Group Description:	Tesla differentiates test groups based on: 1) battery type, 2) number of drive motors, and 3) vehicle line. L - Lithium Ion Battery 2 - AWD Motor Y - Model Y Line of vehicles
Applicable Standards:	FEDERAL Tier 3 BIN 0 & CALIFORNIA ZEV
Carlines Covered by this certificate:	Model Y - Performance AWD, Long Range AWD

Your early review and issuance of the certificate will be greatly appreciated. If you have any questions, please contact me at our office at (510) 249-3755

Sincerely,

Suraj Nagaraj
Sr. Director - Vehicle Homologation

Contents

1	Communications
1.01	Mailing information
01.01.01	Certification information
01.01.02	Responsible official
3	Facilities, Equipment and Test Procedures
3.01	Procedure to determine mass emissions of the fuel fired heater
3.02	Battery pre-conditioning procedures
3.03	Vehicle Configuration and sub-configurations
3.04	Test Procedures
4	Statement of Compliance
5	Reserved
6	Maintenance
6.01	Test vehicle scheduled maintenance
6.02	recommended customer maintenance schedule
6.03	Lubricants and heater fuels
7	Labels
7.01	Label locations
7.02	Sample emission control information label
7.03	California Environmental Performance Index label: 2015 and later model years
7.04	Projected sales information
8	General Technical Description
8.01	Description of propulsion system
8.02	Description of motor(s)
8.03	Description of batteries
08.03.01	Battery charging capacity
08.03.02	Self-discharge information
08.03.03	Description of thermal management system
08.03.04	Definition of end-of-life
08.03.05	Description of battery disposal plan
8.04	Description of controller / inverter
8.05	Description of transmission
8.06	Description of climate control system
08.06.01	Electric heat pump
08.06.02	Fuel-fired heater
08.06.03	Climate control system logic
08.06.04	Tamper resistance of climate control system that includes a fuel-fired heater
8.07	Description of regenerative braking system
08.07.01	Control logic
08.07.02	Percentage of braking performed on road by each axle
8.08	Description of charger
08.08.01	Proper recharging procedures
08.08.02	Power requirements necessary to recharge vehicle
8.09	Accessories which draw energy from the batteries
8.10	Other unique features (solar panels)
8.11	Description of warning system(s) for maintenance / malfunction
08.11.01	Cut-off terminal voltages for prevention of battery damage
8.12	Description of dyno mode
8.13	Description of coastdown mode
9	Running Change vehicle description
10	Road load data
11	Starting and shifting schedules

11.01	Starting
11.02	Shifting
12	Reserved
13	Reserved
14	Reserved
15	Reserved
16	Reserved
17	California Requirements
17.01	Statement of compliance
17.01.01	General statement
17.01.02	Driveability statement
17.02	Supplemental data and certification review sheets
17.03	Engineering evaluation of zero evaporative emissions under any and all operating conditions (for vehicles equipped with fuel- fired heater only)
17.04	Credits
17.04.01	Description of multi-manufacturer agreements
17.04.02	Credit calculation
17.05	Vehicle safety
17.05.01	All information on safe handling of vehicle
17.05.02	Information on safe handling of battery system
17.05.03	Description of emergency procedures
17.06	Description of fuel-fired heater / fuel tank evaporative system

1 COMMUNICATIONS

1.01 Mailing information

01.01.01 Certification information

Tesla, Inc
3500 Deer Creek Road
Palo Alto, CA 94304

01.01.02 Responsible officials

01.01.03 - Primary Contact

Mr. Suraj Nagaraj, Sr Director- Vehicle Homologation
Telephone 510 249 8749

01.01.04 - Secondary Contact

Mr. Ray Wang, Sr Homologation Engineer - Vehicle Homologation
Telephone 240-994-5639

3 FACILITIES, EQUIPMENT AND TEST PROCEDURES

Internal range test reports are on file at Tesla

3.01 Procedure to determine mass emissions of the fuel-fired heater

Not applicable; vehicle not equipped with a fuel fired heater.

3.02 Battery pre-conditioning procedures

The lithium ion battery cells are cycled by the battery cell manufacturer before they are assembled into battery packs. There is no further pre-conditioning necessary.

3.03 Vehicle Configurations and sub configurations

Refer to Appendix 03.03

3.04 TEST PROCEDURES

SAE J1634 was followed for all Range testing and SAE J2263 (as issued 2008-12) was followed for Road load measurement.

SPECIAL TEST INSTRUCTIONS

- See attachment

04.00 Statement of Compliance

This vehicle conforms to US EPA Federal Tier 3 Bin 0 and State of California regulations applicable to 2022 Model Year new ZEV Light-duty Vehicles

05.00 RESERVED

06.00 MAINTENANCE

6.01 Test vehicle scheduled maintenance

Not applicable.

6.02 Recommended customer maintenance schedule

See Owner Hand Book.

6.03 Lubricants and heater fuels

Heater fuel:

Not applicable

Transmission Lubricant:

Capacity

Factory Fill

Make

2750 mL (Rear), 1755 mL (Front)

Trade name

SK

Type

ZIC ATF - 9

Viscosity

Synthetic

Viscosity

7100 cP at -40°C

5.9 cSt at 100°C

Test Vehicle

Same as factory fill

07.00 LABELS

07.01 Label locations

VECI Emission Label



See 07.02

Monroney Label



See 07.03

07.02 Emission Control Information label: 2022 Model Year
 (Mandated in CFR Title 40, Part 86; §86.1807. Label format agreed with EPA)

VEHICLE EMISSION CONTROL INFORMATION

THIS VEHICLE CONFORMS TO U.S. EPA REGULATIONS APPLICABLE TO 2022 MODEL YEAR NEW TIER 3 BIN 0 LIGHT-DUTY VEHICLES AND TO CALIFORNIA REGULATIONS APPLICABLE TO ZEV PASSENGER CARS AND IS CERTIFIED FOR SALE IN CALIFORNIA.

MODEL: 2022 TESLA MODEL Y
MOTOR: 3 PHASE AC
TEST GROUP: NTSLV00.0L2Y
EVAPORATIVE FAMILY: NTSLR0000L2Y

07.03 California Environmental Performance Index label: 2022 Model Year
 (Mandated in California Environmental Performance Label Specifications for 2009 and Subsequent Model Passenger Cars, Light-Duty Trucks and Medium-Duty Passenger Cars. Label format agreed with EPA/ CARB)

Model Y AWD - FE Label

EPA DOT Fuel Economy and Environment


Electric Vehicle

Fuel Economy These estimates reflect new EPA methods beginning with 2017 models.

MPGe Small sport utility vehicle cars range from 16 to 120 MPGe. The best vehicle rates 141 MPGe.

combined city/hwy
city
highway
kW-hr per 100 miles

You save \$#### in fuel costs over 5 years compared to the average new vehicle.

Driving Range
 When fully charged, vehicle can travel about...

 Charge Time: 10 hours (240V) ### miles

Annual fuel COST

\$####

Fuel Economy & Greenhouse Gas Rating (tailpipe only)

10

10 Best

Smog Rating (tailpipe only)

10




10 Best

This vehicle emits 0 grams CO₂ per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also create emissions: learn more at fuel economy.gov.


Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$ 7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at 0.13 per kW-hr. MPGe is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

fuel economy.gov

Calculate personalized estimates and compare vehicles

Smartphone QR Code™



<http://fuel economy.gov/rhd-2019/SLD15>

07.04 Projected sales information (Confidential)

08:00 GENERAL TECHNICAL DESCRIPTION

08.01 DESCRIPTION OF PROPULSION SYSTEM

Rear Drive Unit:

Traction motor × 1,
Fixed ratio gearbox,
Drive inverter

Rear Drive Unit:

Traction motor × 1,
Fixed ratio gearbox,
Drive inverter

8.02 DESCRIPTION OF MOTOR(S)

Front motor:

3-Phase AC induction motor utilizing a squirrel cage 4 pole, variable frequency drive to control the motor.

Rear motor:

3-phase AC internal permanent magnet motor utilizing a six-pole, high-frequency design with inverter-controlled magnetic flux.

8.03 DESCRIPTION OF BATTERIES

The battery packs used in the Tesla Model Y is one of the most technically advanced lithium-ion battery packs in the world. Using customized automotive grade lithium-ion cells, the Tesla battery achieves unmatched energy density and enables the long range capability of the vehicle. The low-profile flat packaging enables an efficient and functional occupant area. The battery has replaceable active short circuit protection that is accessible with the battery in the vehicle via an access panel. A set of switches inside the pack disconnect high voltage from the positive and negative terminals on the battery pack when not in use. To disable the switches from closing during vehicle service, the 12V power feed can be disconnected at the low voltage wiring connector into the battery pack. The battery control system consists of the Battery Monitoring System (BMS) which controls the switches, measures pack current and voltages, electrical isolation of the battery from chassis ground and monitors cell voltages and module temperatures from the Battery Monitor Boards (BMBs) installed on each of the modules.

08.03.01 Battery charging capacity

The fully charged battery contains a minimum amount of usable energy when new, based on the battery type/option fitted to the vehicle.

08.03.02 Self-discharge information

The self-discharge rate of the High Voltage battery is likely to be less than 0.5% per month.

08.03.03 Description of thermal management system

The Tesla battery pack contains an integrated cooling system to ensure that the individual cells are maintained at, or close to, their optimum operating temperature. Incorporated in the vehicle system is an inline heating element to raise and a chiller to lower the pack temperature, when required.

08.03.04 Definition of end-of-life

The battery pack end-of-life shall be determined by Tesla's local service centers with Proper inspection and test methods.

08.03.05 Description of battery disposal plan

Tesla's lithium ion battery packs do not contain heavy metals such as lead, Cadmium, or mercury. They are exempt from hazardous waste disposal standards in the USA under the Universal Waste Regulations. However, they do contain recyclable materials, and Tesla plans to recycle all battery packs removed from vehicles.

Tesla highly recommends that all battery packs be taken to local Tesla service facilities and recycled by Tesla or Tesla authorized agencies, so that the battery packs can be recycled in a safe and efficient manner.

If disposing independently, without return to Tesla, then the owner must assume responsibility for recycling in a safe and legal manner. If an owner does assume this responsibility, Tesla recommends consulting with the appropriate local, state or federal authorities to determine the appropriate methods for disposal and recycling. Keep in mind that disposal regulations may vary dependent on location.

For more information on the recycling of Tesla custom battery packs, please call Tesla Customer Service at 1-877-79TESLA (1-877-798-3752).

08.04 DESCRIPTION OF CONTROLLER / INVERTER

The drive inverter performs several critical functions in the Tesla Model Y including torque control, power and torque limit enforcement, and status monitoring. The drive inverter is an integral part of the drive unit.

08.05 DESCRIPTION OF TRANSMISSION

The transmission is a fixed ratio, mechanical, transversely mounted gearbox with integral final drive (transaxle configuration).

The shift lever is mounted to the steering column. The lever has five detents— that can select Reverse, Neutral, Drive, Cruise and Autopilot (if equipped). Selecting either forward or reverse position enables drive current to the motor to generate the appropriate torque. There is no physical reverse gear needed.

In addition, the lever has a park button which is used to operate the electrically-actuated park brake.

Transmission Shift lever - Steering column



8.06 DESCRIPTION OF CLIMATE CONTROL SYSTEM

General Specifications:

The Model Y climate control modes include Defrost, Panel and Floor (or any combination of these three). The system consists of two panel vents, two front row floor vents, defroster vent, second row floor vents, second row console vents with positive air shut off and turning vane manual control.

08.06.01 Electric cabin heater

The heater unit incorporating a variable speed electric fan is located in the front of the chassis tub with ducting directing the blown air to defrosting, face level and floor level vents in the passenger compartment.

The heater element is of the heat pump, drawing HV electrical energy from the battery pack High Voltage.

Tesla Model Y's heat pump reduces the energy required by the HVAC system in both heating and cooling scenarios. The energy required to heat the cabin varies by weather and occupant comfort needs, but on-average consumes approximately 10% of the total energy available for driving. However, even moderately cold weather (0°C), consumption can increase to 25% or more. A heat pump consumes a small amount of electrical energy to thermodynamically "upgrade" low-temperature (less useful) thermal energy to higher-temperature (more useful) thermal energy, making it suitable for occupant comfort. That is, for a given electrical power input, a heat pump will return 1 to 5x in useful heating power; an electrical cabin heater provides 1:1 in heating power, and therefore is far less efficient.

Typically, this is accomplished using conventional refrigeration system components, e.g., compressors, valves, heat exchangers and so on, configured or connected together in a specific way. Tesla's heat pump uses conventional components with unconventional flexibility or cycle configuration. A heat pump must generally have a low-temperature source from which to draw energy. Tesla's system enables the heat pump source to be either the power-train coolant loop, e.g., low-temperature waste heat produced naturally by the vehicle while driving, ambient air, the battery thermal mass, the cabin thermal mass, or combinations thereof. Another advantage of this architecture is the ability to reject heat into the battery pack via a liquid-cooled condenser for a limited amount of time during cabin cooling scenarios when the temperature of the battery is modest. Therefore, for most startups with AC on, the relatively cool, well-coupled, large thermal mass serves to lower discharge pressure and therefore reduces compressor input power relative to a conventional air-cooled condenser setup.

Modern automotive heat pump systems using an HFC/HFO refrigerant suffer from low heating capacity in extremely cold ambient conditions, e.g., minus 10°C and below. Therefore, these conventional systems retain an expensive high-voltage cabin heater to cover heating deficits whenever the heat pump capacity is insufficient. Tesla's heat pump system also provides ways to remove a cabin air high voltage PTC heater completely by using the compressor as an electrical heater in specific scenarios. In fact, the electrical power draw capability of the compressor significantly exceeds a typical HV cabin PTC heater capability. This last point is accomplished via Tesla's unique architecture – the cycle is configured in such a way to provide a controlled environment for the compressor, regardless of ambient conditions, and ultimately unlocks the full electrical input power. Therefore, Tesla's thermal system can sometimes operate like a heat pump (heat efficiently) and sometimes like an electrical heater when heat pump capacity is not sufficient for comfort – using the same compressor.

08.06.02 Fuel-fired heater

Not applicable

08.06.03 Air conditioning

The Model Y air conditioner system is an R134a refrigerant consists of a high voltage electric scroll type with integrated inverter with High Voltage Interlock Loop. The compressor Oil is Poly Olefin Ester oil that is non-conducting.

08.06.04 Climate control system logic

Vehicle Controller printed circuit boards activate actuators and responds to evaporator air outlet temperature sensor, heat pump condenser outlet temperature sensor and air duct temperature sensors, as well as user demands from center display.

08.06.05 Tamper resistance of climate control system that includes a fuel-fired heater

Not applicable

08.07 DESCRIPTION OF REGENERATIVE BRAKING SYSTEM

Regenerative braking (RGB) occurs when the driver lifts his foot from the accelerator pedal while the vehicle is moving; the experience is analogous to engine braking on a gasoline-powered car with a conventional manual transmission. The friction braking system is independent of RGB.

The amount of RGB torque generated depends on the accelerator pedal position – largest when the accelerator pedal is fully released, decreasing as the pedal is depressed, reaching zero torque when the pedal reaches its neutral torque position (a position that is a function of vehicle speed). The max RGB deceleration also varies depending on vehicle speed. The maximum RGB profile is defined as a target total deceleration rate as a function of vehicle speed. The max RGB profile is tailored to everyday driving conditions, which typically exhibit higher deceleration rates at lower speeds.

When the battery pack is near maximum capacity, regenerative braking function will be limited to ensure the maximum capacity of the battery is not exceeded. Any RGB limiting will be ramped in gradually to allow the driver to adapt to the changing RGB performance. When the battery pack is below 0 degrees, RGB will not be allowed because the batteries are not rated to accept charge below this temperature. Any RGB limiting will be ramped in gradually to allow the driver to adapt to the changing RGB performance. The vehicle notifies the driver of any limits on the regenerative braking function.

08.08 DESCRIPTION OF VEHICLE ELECTRICAL SUPPLY EQUIPMENT (CHARGER)

The Tesla Model Y is capable of accepting energy either from a permanent facility installed at the owners location or from many readily available power outlets when 'on the road'.

Optional - The dedicated High Power Connector (HPC) can be purchased separately from the vehicle and a certified electrician will confirm the capabilities of the residential supply circuit at the vehicle owner's location. Confirmation of a satisfactory residential electrical Supply will lead to the installation of a hard-wired HPC unit, this will expedite vehicle charging at the most efficient rate. The HPC can supply available current up to a maximum of 80 amps and incorporates electronic systems that communicate with the vehicle control systems to indicate the maximum available current so that the vehicle can determine the amount and rate of charge required. But the current standard on-board charger is limited to 48A. So the charging duration is 8.5 hrs. at the rate of 48 Amps.

Standard - Charging at rates lower than or equal to 32A can also be achieved via a mobile connector. The universal mobile connector is included as standard in the purchase of every Model Y and is an individual cable that connects the vehicle to any available domestic power outlet and can deliver current to a maximum of 32 Amps. The Mobile Connector incorporates similar electronic circuitry as the HPC to communicate with the vehicle and manage the charging process. The charging duration is 12 hrs. at the rate of 32 Amps.

The vehicle is also capable of accepting DC current up to 525A from an off-board charger (Supercharger).

08.08.01 Proper recharging procedures

The charging system adjusts automatically to the available AC line voltage, frequency and current, within limits. The charging system in the vehicle works in conjunction with either of the three external charging stations; the permanently installed HPC, the permanently installed supercharger or the portable Mobile Connector.

Anytime the EV Inlet door is opened, the vehicle will prepare to enter CHARGE state. Once the user connects either supply cable to the vehicle, the charging system signals to the vehicle that it is ready to deliver the charge. The vehicle locks the cable onto the vehicle and then indicates that it is ready to accept energy and charging will commence. Failure of any of these steps will result in fault condition and lack of **full charging capability**. Vehicle could still charge on low power if handle lock is not engaged.

Prepare to charge state



Low Power Charging Indication



High Power Charging Indication



If the battery temperature is near or below freezing temperatures, normal charging will not occur. The vehicle will identify this condition and will begin heating the battery coolant and circulating the coolant to raise the battery temperature to enable charge. When the pack temperature rises to a temperature within the allowable charging range, heating will reduce or stop and charging will commence.

08.08.02 Power requirements necessary to recharge vehicle

Model Y comes with one on-board charger is capable of a maximum of 48A on 208V or 240V outlets and 12A on 120V outlets.

08.10 OTHER UNIQUE FEATURES (i.e. solar panels)

Not applicable; vehicle is not equipped with any such features.

08.11 DESCRIPTION OF WARNING SYSTEM(S) FOR MAINTENANCE / MALFUNCTION

The Tesla Model Y is equipped with a tell-tale lamp located in the instrument pack to indicate any malfunctions through user alerts e.g. "battery failure" with battery symbol.

The tell-tale is complemented by more detailed information exhibited on the Center Display. An additional driver aid which indicates the nature of the malfunction as well as a wide range of additional vehicle data, such as when maintenance is needed.

08.11.01 Cut-off terminal voltages for prevention of battery damage

The control electronics inside of the Drive Unit and Charger are programmed not to allow the unit to drive the voltage of the battery above or below hard voltage limits. If the battery pack is unable to achieve a desired response from these systems and the voltage reaches above or below a set limit, the two switches inside the battery pack will open, disabling the entire high voltage system in the car.

8.12 DESCRIPTION OF DYNO MODE

Tesla, Inc. implemented user interface (UI) features that enable access to our "Dyno Mode" for all users. This feature is required to be enabled to maintain representative driving controls while testing on a chassis dynamometer.

In order to preserve the proper driving functionality and behavior, Dyno Mode executes the following features:

- Disable Stability Control to ensure no false interaction with the dyno.
- Disable Traction Control to ensure no false interaction with the dyno.
- Disable Active Drive Line Damping to avoid inducing oscillations in the dyno.
- Force the torque split to be as it would be under normal straight-line driving conditions
- Disable Brake Disk Wipe

When the Stability Control and Traction Control systems become faulted, as is the case on a dynamometer where driving is detected but movement is not, regenerative braking is disabled so that unintended braking torque does not lead to loss of traction or control on low friction surfaces. Disabling Stability Control and Traction Control prevents those systems from disrupting regenerative braking behavior, maintaining the most representative driving energy consumption.

Dyno Mode can be activated by the user, according to the steps in the driver's guide.

Dyno Mode can be deactivated by the user by pressing the "Power Off" button within the Safety & Security tab of the UI.

8.13 DESCRIPTION OF COASTDOWN MODE

To engage Coastdown Mode:

1. Press and hold Tesla T to bring up Access Code prompt
2. Type "coastdown"

Vehicle Behavior:

UI will send out a binary signal in the message on the right bus. The thermal controller should consume this message and unconditionally close the louver and turn off the refrigerant system.

Display "COASTDOWN" in cluster where we display other mode info like "VALET" and "CHILL"

Coastdown Mode will turn OFF after drive cycle is complete.

09.00 RUNNING CHANGE VEHICLE DESCRIPTION

Refer to appendix 09.00, if applicable

10.00 ROAD LOAD DATA

See Verify application

11.00 STARTING AND SHIFTING SCHEDULES

11.01 Starting

The Model Y does not have a traditional starter switch and instead has a smart entry system for greater safety and customer convenience. The smart entry system comprises of an authenticated phone (using Bluetooth Low Energy or internet connectivity) or key card (using Near Field Communication), a weight sensor embedded into the driver seat, and the brake pedal.

ENTERING

An authenticated phone can be used to passively unlock the car when connected, in range and a door handle is pulled or trunk release button is pressed.

The Tesla mobile app on an authenticated phone can be used to manually unlock the vehicle.

A key card can be used to unlock the car by scanning the card on the b-pillar.

After a successful key card scan on the b-pillar or center console:

- a. Vehicle is authorized to Drive within a reasonable time period. Time period is extended based on additional user interaction which include: driver opening their door, driver sitting down, driver closing their door while seated.
- b. If time period is exceeded, upon brake press, instruct driver to rescan key card on the center console to reauthorize Drive.
- c. Accessory Mode functions will be available without the user having to rescan their key card.

LOCKING

An authenticated phone can be used to passively lock the car when the phone is disconnected or moved away from the vehicle. This passive function can be disabled in controls on the touchscreen.

The Tesla mobile app on an authenticated phone can be used to manually lock the vehicle.

A key card can be used to lock the car by scanning the card on the b-pillar. There is no passive locking with key cards (car does not auto lock).

Note: Using a key card to lock/unlock will be equivalent to an active lock/unlock—i.e., clicking on the key fob to lock and double-clicking to unlock.

STARTING

If successful interaction between authenticated phone or the key card and vehicle controller occurs, the system deactivates the immobilizer. Immobilizer deactivation only happens after 2 conditions are met below. The vehicle then enters accessory mode analogous to a “ACC” position on a conventional IC engine. In this mode, low voltage (12V) is supplied to the vehicle allowing operation of the radio and other accessories connected to the accessory rail.

High Voltage (HV) necessary to enable vehicle propulsion is enabled only by the closing of the contactors, which can only be triggered when the following conditions are both satisfied,

1. Authenticated phone or key card is authorized and key code is validated AND
2. Brake pedal is depressed.

By requiring brake pedal activation, along with the appropriate key code, this system ensures the safety of vehicle occupants by not allowing self mobility of the vehicle without the driver providing proper control inputs (i.e., service brake activation) and appropriate driver authorization (i.e., presence of the key code). If either the service brake is not activated or the key code not present, the vehicle controller will not close the contactors and self-mobility is not possible.

If the brake pedal is depressed and the proper key code present, the drive rail will activate (immobilizer deactivates) and allows the vehicle to be shifted out of Park.

11.02 SHIFTING

Not applicable – the vehicle has a single-speed transmission.

12:00 -16:00 RESERVED

17:00 CALIFORNIA REQUIREMENTS

17:01 Statement of Compliance

17.01.01 General Statement

The production vehicles which are subject to registration or sale in the State of California will be, in all material respects, substantially the same in construction as test vehicles which are certified by the California Air Research Board; and will meet all the applicable emissions standards which are promulgated by the California Air Research Board in accordance with Section 43101 of the Health and Safety Code.

Tesla attests that the vehicle emission control label complies with the label durability requirements of the “California Motor Vehicle Emission Control and Smog Index Label Specifications”, Title 13, CCR, Section 1965.

17.01.02 Drivability statement

This statement is no longer included in the California Exhaust Emission Standards and Test Procedures for 2001 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles (as of January 01 2006); as was the case in previous versions.

17.02 Supplemental data and certification review sheets

See attached

17.03 Engineering evaluation of zero evaporative emissions under any and all operating conditions (for vehicles equipped with fuel-fired heater only)

Not applicable; vehicle is not equipped with fuel-fired heater.

17.04 Credits

17.04.01 Description of multi-manufacturer arrangements

Not applicable; Tesla has no such agreements in place.

17.04.02 Credit calculation

Tesla a manufacturer that produces only pure battery electric vehicles is not required to produce a percentage of annual production volume as ZEV's and therefore will earn such credit on all 2019 to 2022, inclusive, model year vehicles. This vehicle is a full function ZEV with a range depending on the battery pack option chosen by the customer. Based on the UDDS of range shown in the table below, all variants will be classified as a ZEV and in the 13 CCR 1962.2(d)(5)(A), this means 2019 to 2022, each vehicle will earn 4 credits per vehicle.

Variant	UDDS Range (Miles) / Credits per vehicle
Model Y Performance AWD	409 / 4
Model Y Long Range AWD	446 / 4

17.05 VEHICLE SAFETY

17.05.01 All Information for safe operation of vehicle

Tesla will submit a copy of the finalized vehicle owner's handbook by separate letter when it becomes available.

17.05.02 Information on safe handling of battery system

HANDLING

Do not short circuit, puncture, incinerate, crush, immerse, force discharge, or expose the battery pack to temperatures outside the specified maximum storage temperature range of -20°C to 60°C.

The battery pack has a nominal operating voltage of 400 VDC. The battery pack is sealed in a rigid metal case and its exterior is isolated from high voltage. Handling the battery pack is electrically safe provided the enclosure remains closed.

The battery pack contains hermetically sealed lithium ion cells that contain a number of chemicals and materials of construction. Risk of exposure to electrode materials and Liquid electrolyte will only occur in cases of mechanical or thermal abuse of the battery Pack.

STORAGE

Do not store the battery pack in a manner that allows terminals to short circuit. Do not place near heating equipment, nor expose to direct sunlight for long periods. The battery pack should only be stored in approved packaging and stacked no more than two (2) packages high. To maintain service life, the battery pack should be stored at a state of charge (SOC) of 15 to 50%.

TRANSPORT

Lithium ion batteries are regulated as Class 9 Miscellaneous dangerous goods (also known as “hazardous materials”) pursuant to the International Civil Aviation Organization.

(ICAO) Technical Instructions for the Safe Transport of Dangerous Goods by Air, International Air Transport Association (IATA) Dangerous Goods Regulations, the International Maritime Dangerous Goods (IMDG) Code, European Agreements concerning the International Carriage of Dangerous Goods by Rail (RID) and Road (ADR), and applicable national regulations such as the USA’s hazardous materials regulations (see 49 CFR 173.185). These regulations contain very specific packaging, labelling, marking, and documentation requirements. The regulations also require that individuals involved in the preparation of dangerous goods for transport be trained on how to properly package, label, mark and prepare shipping documents.

17.05.03 Description of emergency procedures

HIGH VOLTAGE EXPOSURE

If one of the Tesla products has been visibly damaged or its enclosure compromised, then practice appropriate high voltage preventative measures until the danger has been assessed (and dissipated if necessary).

FIREFIGHTING MEASURES

If a fire or explosion occurs when the battery pack is charging, shut off power to the charger. In case of burning lithium ion fires, flood the area with water. The water may not extinguish them, but will cool the adjacent batteries and control the spread of the fire. CO₂, dry chemical and foam extinguishers are preferred for small fires, but also may not extinguish burning lithium ion batteries. Burning batteries will burn themselves out. Virtually all fires involving lithium ion batteries can be controlled with water. When water is used, however, hydrogen gas may be a by-product which can form an explosive Mixture with air. LITH-X (powdered graphite) or copper powder fire extinguishers, sand, dry ground dolomite or soda ash may also be used. These materials act as smothering agents.

Damaged or opened cells or batteries can result in rapid heating (due to exothermic reaction of constituent materials) and the release of flammable vapors. Water (and other items listed above) disperses heat when applied in sufficient quantity to a fire. Extended heat exposure can lead to ignition of adjacent cells with a potential complete envelopment of the battery pack if not cooled. An extinguished lithium ion battery fire can re-ignite due to the exothermic reaction of constituent materials from broken or damaged cells. To avoid this, remove sources of ignition and cool the burned mass by flooding with (or immersing in) water. Fire-fighters should wear self-contained breathing apparatus. Cells or batteries may flame or leak potentially hazardous organic vapors if exposed to excessive heat, fire or over voltage conditions. These vapors include HF, oxides of carbon, aluminum, lithium, copper, and cobalt. Additionally, volatile phosphorus pentafluoride may form at temperatures above 230° Fahrenheit. Never cut into the sealed battery pack enclosure due to the high voltage and electrocution risks.

If a decision is made to fight a battery fire aggressively, then large amounts of water should be applied from a safe distance with the intent of flooding the battery pack enclosure as completely as possible. Alternatively, if a decision is made to fight a battery fire defensively, then the fire crew should pull back a safe distance and allow the battery to burn itself out. Fire crews may choose to utilize a water stream or fog pattern to protect exposures or control the path of smoke.

FIRST AID MEASURES

Under normal conditions of use, the constituent battery cells are hermetically sealed. Contents of an open (broken) constituent battery cell can cause skin irritation and/or chemical burns. If materials from a ruptured or otherwise damaged cell or battery contact skin, flush immediately with water and wash affected area with soap and water. For eye contact, flush with significant amounts of water for 15 minutes and see physician at once. Avoid inhaling any vented gases. If a chemical burn occurs or if irritation persists, seek medical assistance. Seek immediate medical assistance if an electrical shock or electrocution has occurred (or is suspected).

17.06 Description of fuel-fired heater / fuel tank evaporative system

Not applicable; vehicle is not equipped with fuel-fired heater.

3.03 Vehicle Configuration and sub-configurations

Make Carline Type Test Group Final Drive ratio Emission Control Exhaust Evap Model Type Basic Engine code (F/R) Transmission Type / Code Vehicle ID tested	Tesla Model Y Battery Electric Vehicle NTSLV00.0L2Y 1 NA (BEV) NA (BEV) NA (BEV) Model Y Long Range AWD L2Y AV/1 YD222-231326
Vehicle Configuration # Gross Vehicle Weight (lbs) 33% Curb Mass (lbs) Loaded Vehicle Weight (lbs) Equivalent Test Weight (lbs) Wheel / Tire Target Road Load A lbf B lbf/mph C lbf/mph ² Road Load HP @ 50mph	0 5240 4381 4681 4750 255/45 R19 34.26 0.3191 0.0142 11.44
Vehicle Configuration # Gross Vehicle Weight (lbs) 33% Curb Mass (lbs) Loaded Vehicle Weight (lbs) Equivalent Test Weight (lbs) Wheel / Tire Target Road Load A lbf B lbf/mph C lbf/mph ² Road Load HP @ 50mph	1 5240 4381 4681 4750 255/40 R20 33.45 0.3860 0.0127 11.27

Fuel Economy Data Vehicle (FEDV) Selection Justification – FEDV curb mass vehicle accounts for options that have a greater than 33% take rate and highest sold wheel/tire combination that collectively represents a vehicle configuration / sub configuration that has the largest sales volume within that Model Type. Tesla affirms that the road load power, and the target coefficients are those that are appropriate for the ETW of the vehicle.

3.03 Vehicle Configuration and sub-configurations

Make	Tesla
Carline	Model Y
Type	Battery Electric Vehicle
Test Group	MTSLV00.0L2Y
Final Drive ratio	9.04
Emission Control	NA (BEV)
Exhaust	NA (BEV)
Evap	NA (BEV)
Model Type	Model Y Performance AWD
Basic Engine code (F/R)	L2Y
Transmission Type / Code	AV/1
Vehicle ID tested	YD221-R00562
Vehicle Configuration #	0
Gross Vehicle Weight (lbs)	5712
33% Curb Mass (lbs)	4416
Loaded Vehicle Weight (lbs)	4716
Equivalent Test Weight (lbs)	4750
Wheel / Tire	255/35 R21 (FT) - 42psi 275/35 R21 (RR) - 42psi
Target Road Load A lbf	45.49
B lbf/mph	0.1720
C lbf/mph ²	0.0160
Road Load HP @ 50mph	12.55


Fuel Economy Data Vehicle (FEDV) Selection Justification – FEDV curb mass vehicle accounts for options that have a greater than 33% take rate and highest sold wheel/tire combination that collectively represents a vehicle configuration / sub configuration that has the largest sales volume within that Model Type. Tesla affirms that the road load power, and the target coefficients are those that are appropriate for the ETW of the vehicle.



Model 3/Y

Driver's Guide - Vehicle Settings


Main Screen Settings

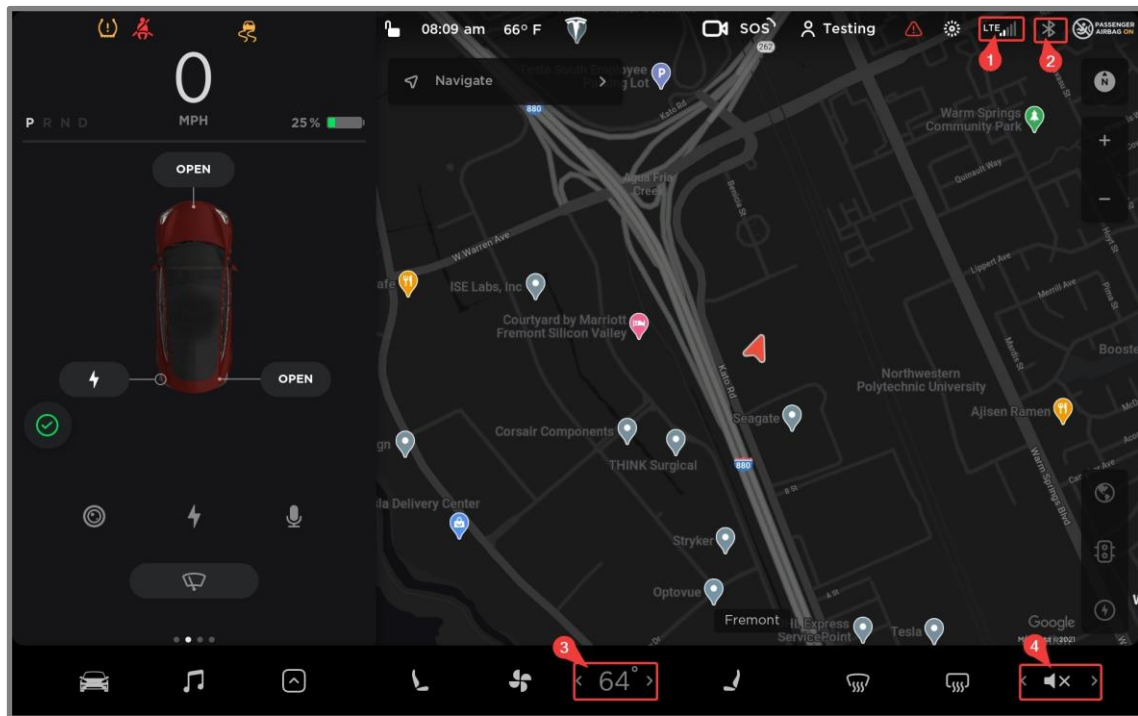

- Prior to testing, all vehicle settings must be confirmed. The vehicle settings should match all slide illustrations.
- On the main touchscreen the following should be checked.
 1. WIFI is **OFF**
 2. No Bluetooth device is connected
 3. HVAC is turned **OFF**
 4. Media Volume is turned **OFF**
- Once those settings are checked, additional vehicle settings should be checked by pressing the settings icon in the lower left-hand side of the screen

Main Screen Settings

Turning off WIFI

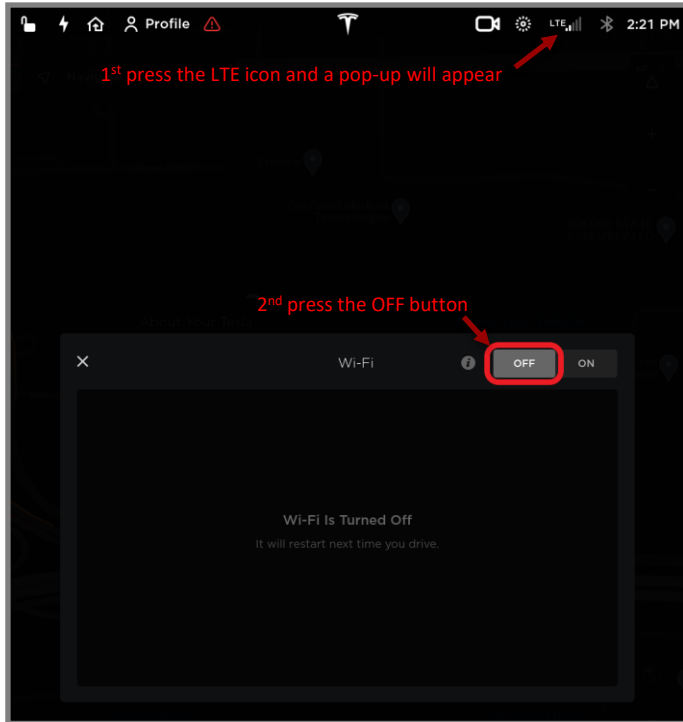


Turning off HVAC

1. Verify HVAC is off by selecting the fan icon in the lower section of the touch screen.




*HVAC set temperature will be gray indicating HVAC is off

2. The HVAC control window will pop up. Press the power button if the icon is blue. Pressing this icon when blue will turn the HVAC off.

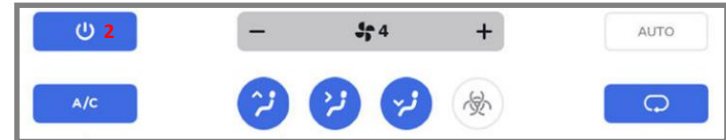

Quick Controls

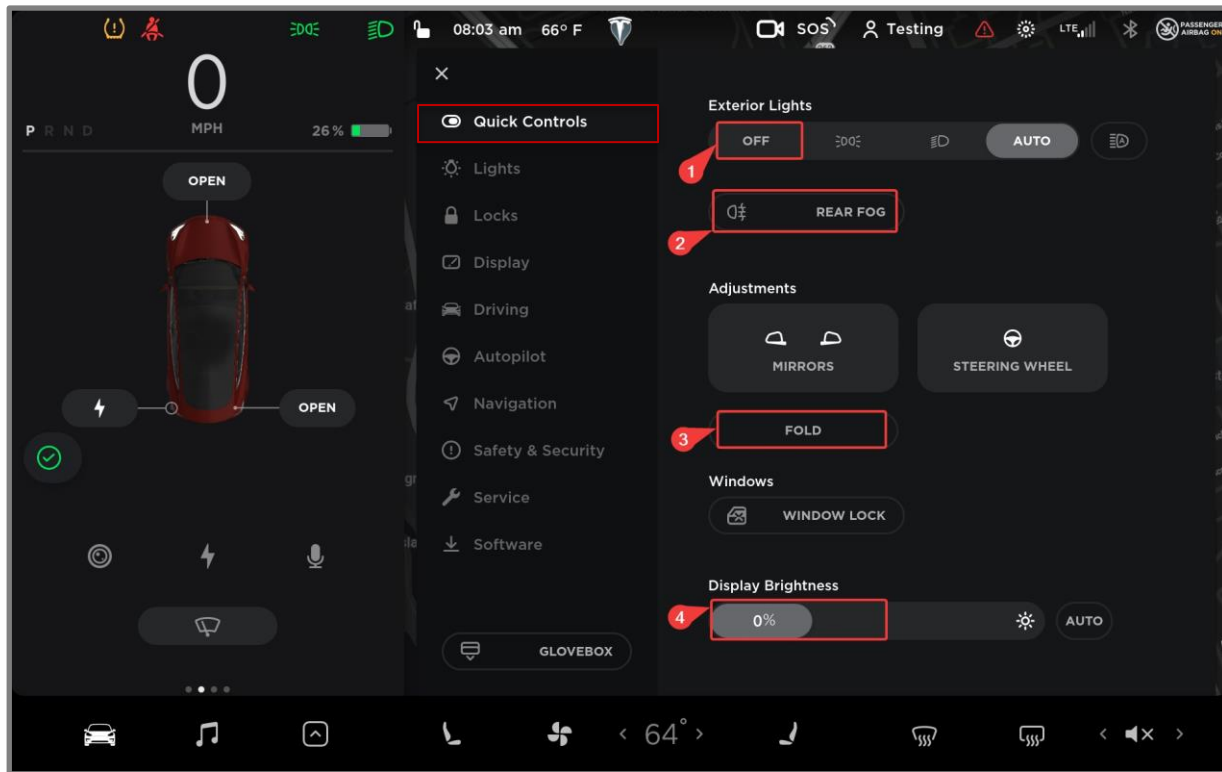

Quick controls

1. Exterior lights should be turned **OFF**
2. Rear fogs turned **off**
3. Mirror fold turned **off**
4. Brightness set **below 50%**.



Lights and Locks

Lights


1. Under lights, match all the settings with the illustration
2. Rear fog lights turned **off**
3. Dome lights turned **off**
4. Auto high beam **off**
5. Headlights after exit **off**
6. Steering wheel lights **off**

Locks

1. Walk-away door lock **off**
 2. Unlock on park **on**
 3. VCLEFT Feature 1 (dev builds only) **on**
- Match the illustration for the rest of the Lock options

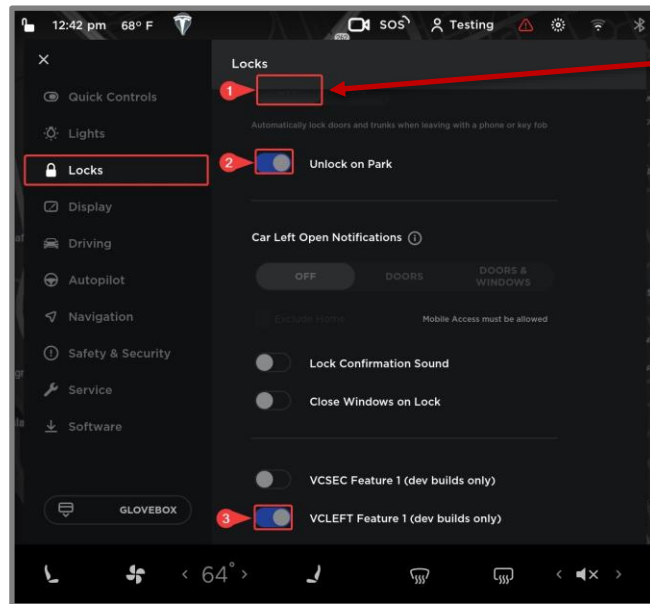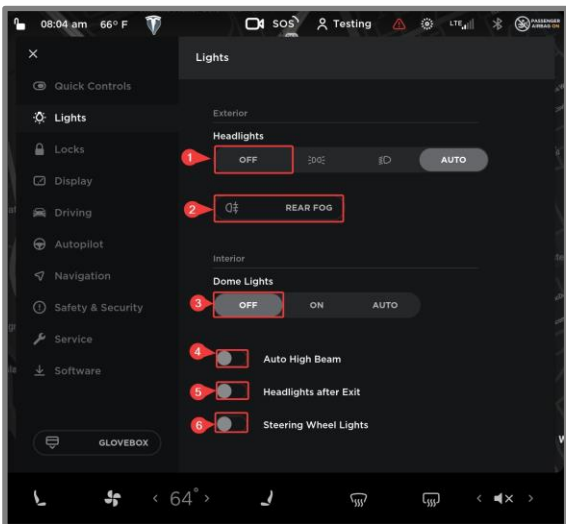


Display and Driving

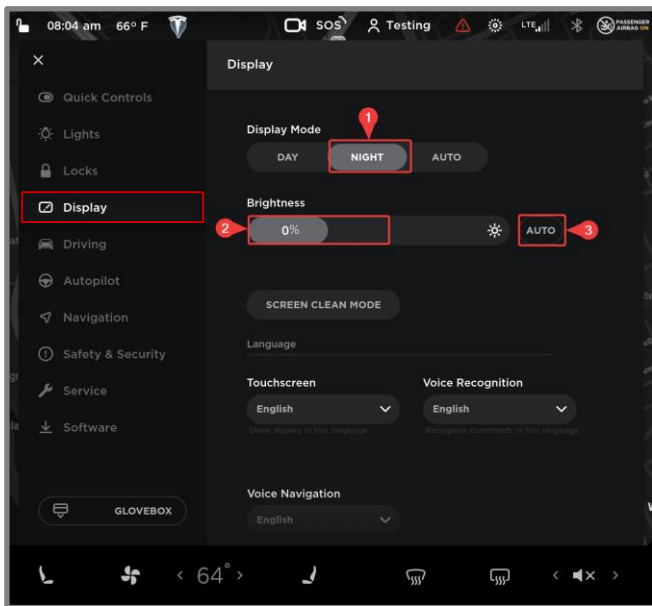

Display


1. Display mode should be set to **night**
2. Brightness set **below 50%**.
3. Auto turned **off**.

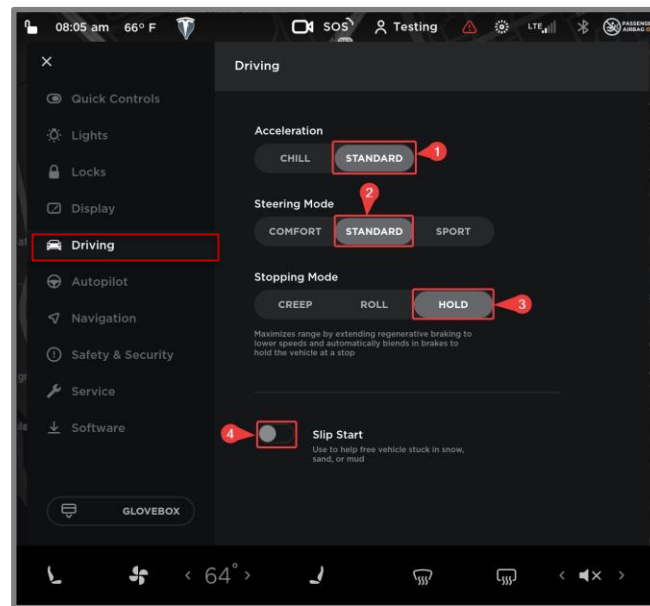

Driving


1. Acceleration set to **standard**
2. Steering mode set to **standard**
3. Stopping mode set to **hold**
4. Slip start **off**

Autopilot

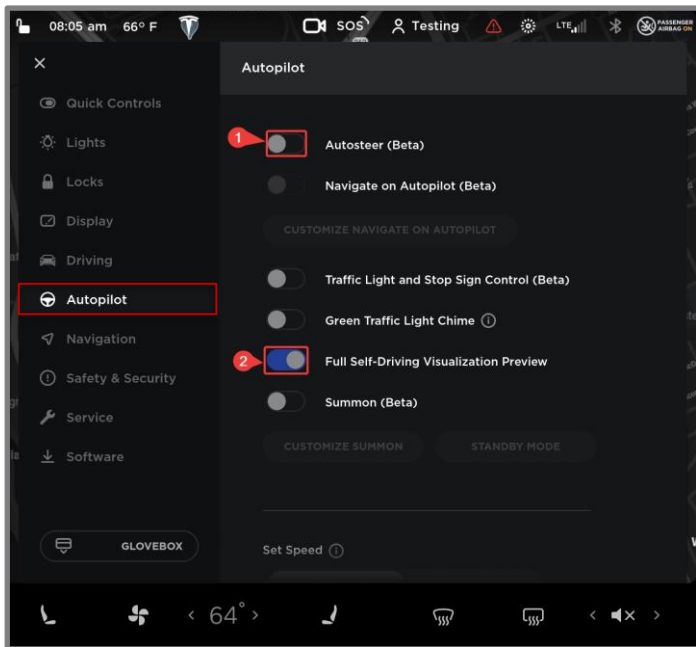

Autopilot


1. Autosteer set to **off**
2. Full self driving preview set to **ON**

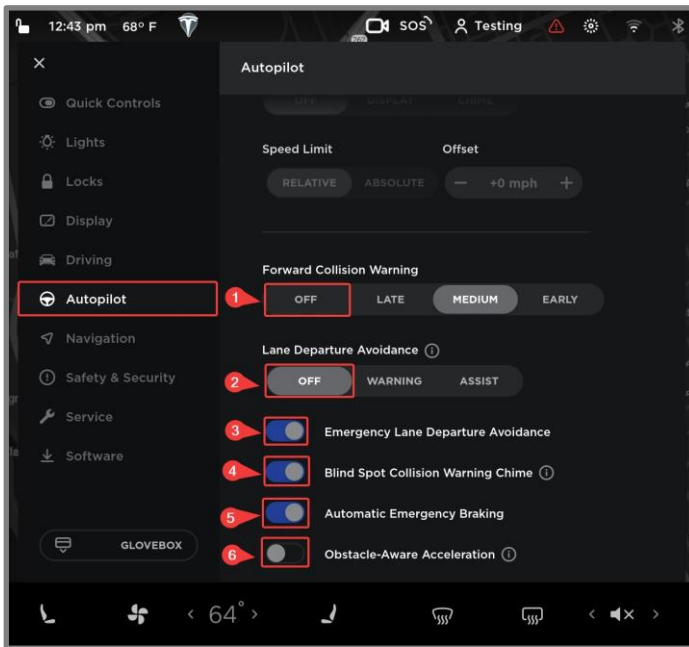

Autopilot (continued)

1. Forward collision warning **off**
2. Lane departure avoidance **off**
3. Emergency lane departure avoidance **on**
4. Blind spot collision warning chime **on**
5. Automatic emergency braking **on**
6. Obstacle-aware acceleration **off**


Navigation

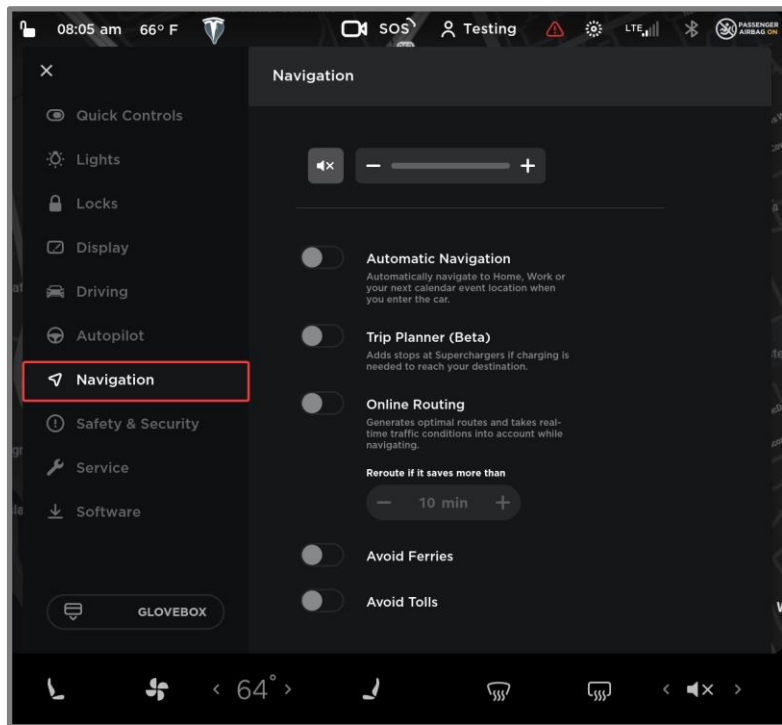

Navigation


1. Match the illustration. All settings should be turned off.

Safety & Security and Service

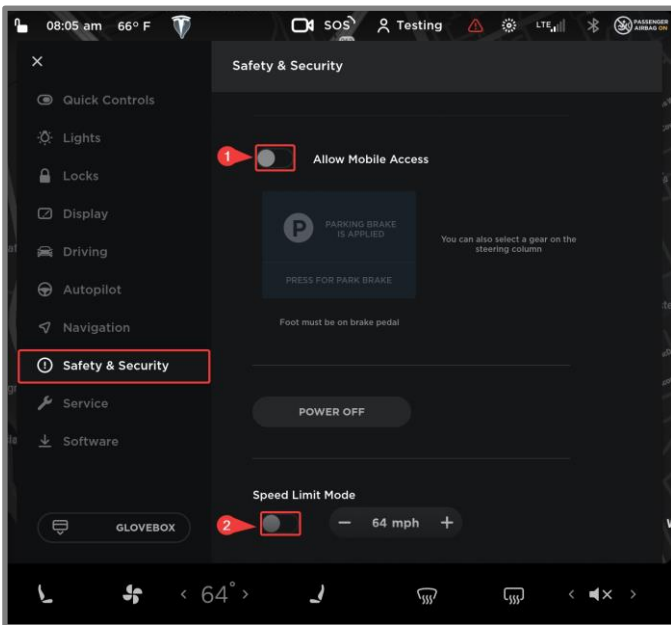

Safety & security


1. Mobile access off
2. Speed limit mode should be set to **off** for any dynamic section of testing
3. All other options should be **off**

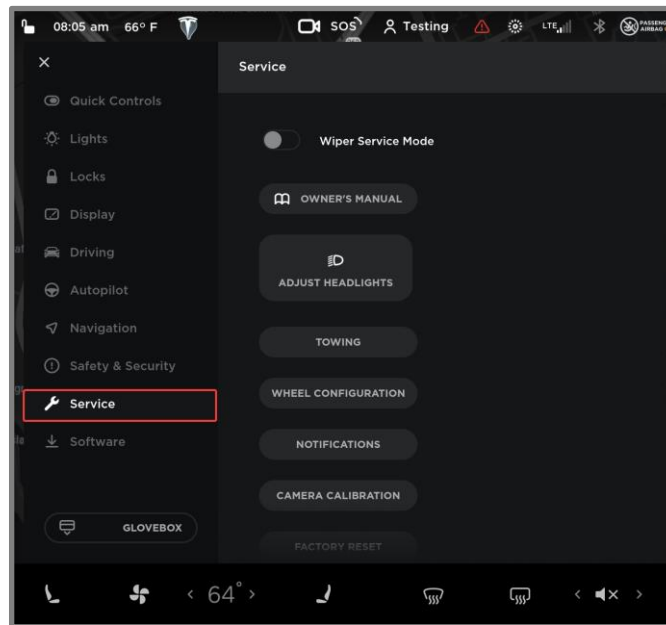

Service

1. Match all the settings with the illustration.



Software

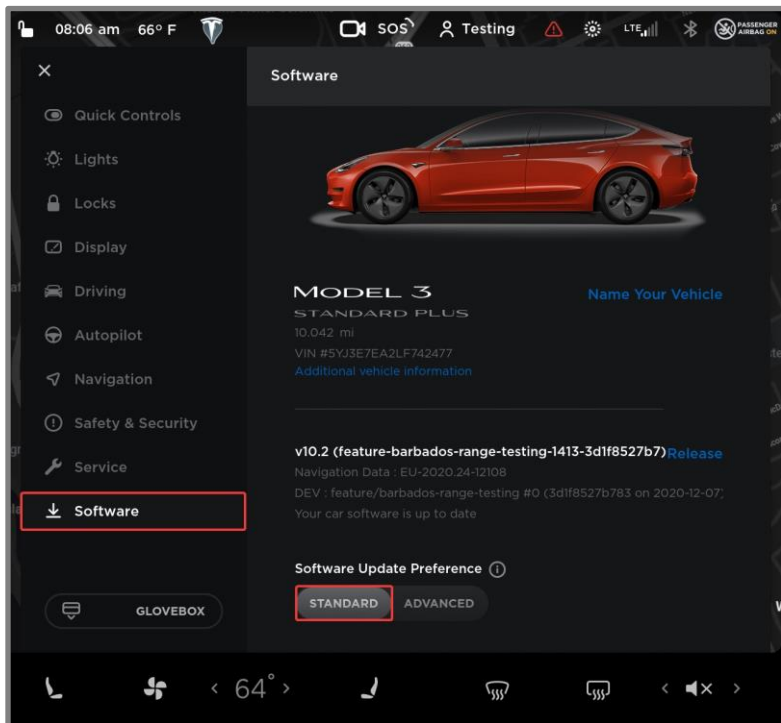

Software


- Software update preference should be set to **standard**

Dyno Mode

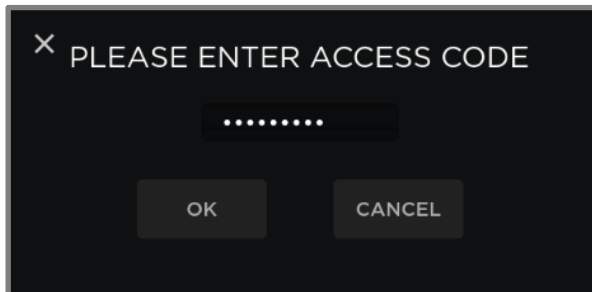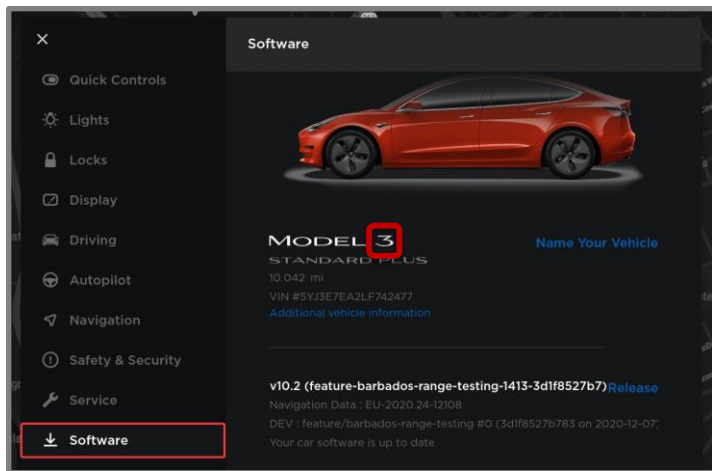

1. Under the software tab of the UI, hold on the 3 in Model 3 and Y in Model Y for 5 seconds to enter developer mode.
2. When the access code window appears, type DEERCREEK.

Dyno Mode

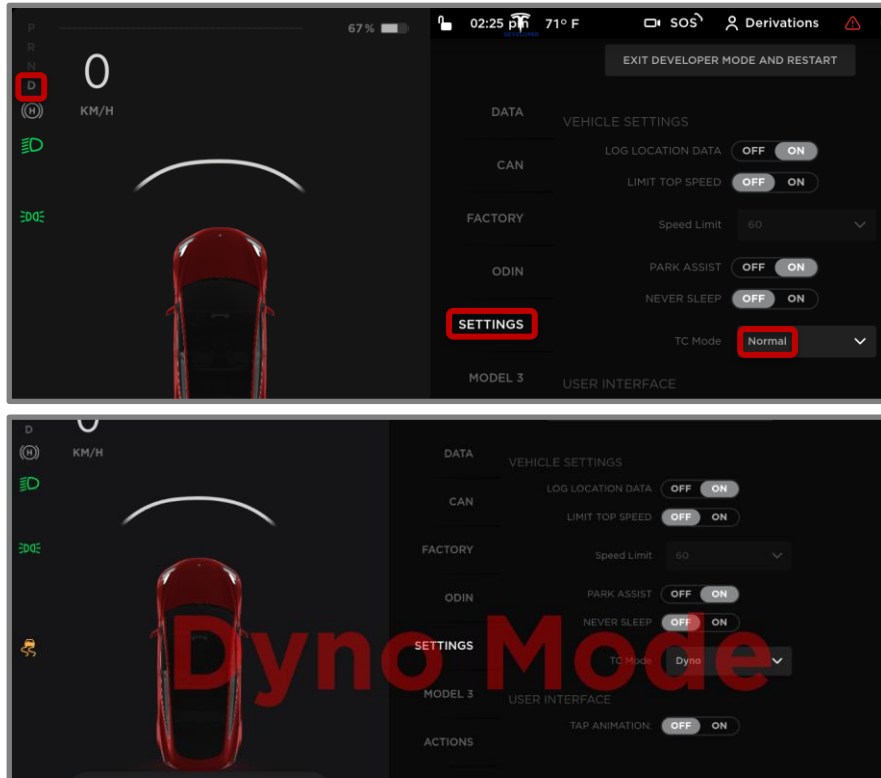

1. Once the vehicle is in developer mode, put the vehicle into DRIVE.
2. Then under the settings tab of the developer screen, change the TC mode from NORMAL to DYN0.
3. Verify the vehicle is dyno mode by dyno mode across the UI.




Model 3/Y

Current Measurements

Requirements

- 1 Hioki current probe (or similar instrument with high enough accuracy)
 - Minimum current rating of 500-amp clamps.
 - Hioki current probes should be zeroed out before installation
- Power Analyzer

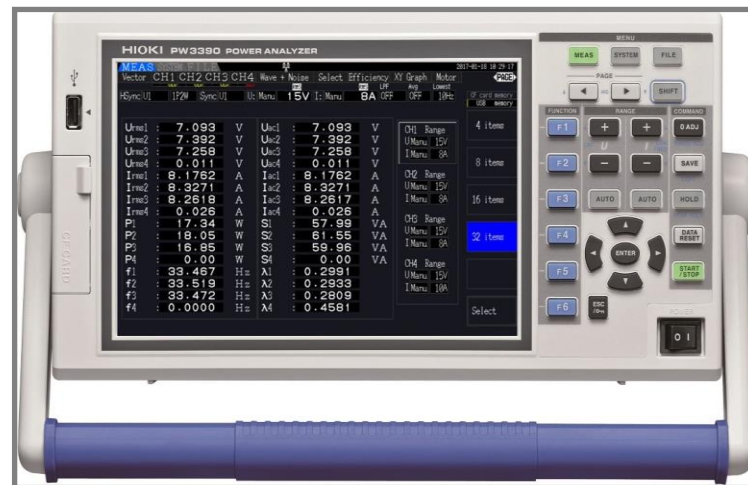

Install



- Zero out the current clamp before installing.
- Install the current clamp on HV cable extension cable located under the rear seat cushion.
- Reinstall the rear seat cushion over the current clamp.

Certification Summary Information Report

Test Group	NTSLV00.0L2Y			Evaporative/Refueling Family			--			
Models Covered by this Certificate										
Carline Manufacturer	Division	Carline	Certification Region Code(s)	Drive System	Trans - Type	- # of Gears	Trans - Lockup			
Tesla, Inc.	1 - Tesla Motors	45 - Model Y Long Range AWD	Federal	All Wheel Drive	Automatic	1	No			
Tesla, Inc.	1 - Tesla Motors	47 - Model Y Performance AWD	California + CAA Section 177 states	All Wheel Drive	Automatic	1	No			
Tesla, Inc.	1 - Tesla Motors	45 - Model Y Long Range AWD	California + CAA Section 177 states	All Wheel Drive	Automatic	1	No			
Tesla, Inc.	1 - Tesla Motors	47 - Model Y Performance AWD	Federal	All Wheel Drive	Automatic	1	No			
Engine Description										
Hybrid Type	--			Hybrid Description	--					
Engine Type	--			Mfr Engine Description	--					
Engine Block Arrangement	--			Mfr Engine Block Arrangement Description	--					
Camless Valvetrain Indicator	--			Oil Viscosity/Classification						
Number of Cylinders/Rotors	--			Mechanically Variable Compression Ratio Indicator	--					
After Treatment Device(s) (ATD)										
Mfr After Treatment Device (ATD) Comments	--									
Direct Ozone Reduction (DOR) Device	--									
Mfr Emission Control Device Comments	--									
Official Test Numbers										
Test Group Fuel	FTP	US06	SC03	Cold CO	Highway	EPA City Litmus Value	EPA City Litmus Threshold	EPA Highway Litmus Value	EPA Highway Litmus Threshold	CREE Weighting Factor
Electricity	--	--	--	--	--	--	--	--	--	--
SFTP LEV-III Official Test Numbers										
Test Group Fuel	FTP		US06			SC03				
Electricity	--		--			--				
Official Charge Depleting Test Numbers										
Test Group Fuel	UDDS			Highway						
Electricity	NTSL10071764			NTSL10071765						
Electricity	MTSL10067003			MTSL10066998						

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Hybrid Electric Vehicle And Fuel Cell Information			
Rechargeable Energy Storage System	Battery(s)	Rechargeable Energy Storage System, if Other	--
Battery Type	Lithium Ion	Number of Battery Packs	1
Total Voltage of Battery Packs	360	Battery Energy Capacity	235
Battery Specific Energy	180	Battery Charger Type	On-Board
Number of Capacitors	--	Capacitor Rating (In Farads)	--
Mfr Capacitor Comments	--		
Hydraulic System Description	--		
Regenerative Braking Type	Electrical Regen Brake		
Regenerative Braking Source	Both	Driver Controlled Regenerative Braking	No
Mfr Regenerative Braking Description	--		
Drive Motor(s)/Generator(s)	4		
Motor/Generator Type 1	AC 3 PHASE PERMANENT MAGNET	Rated Motor/Generator Power	200
Motor/Generator Type 2	AC 3 PHASE PERMANENT MAGNET	Rated Motor/Generator Power	179
Motor/Generator Type 3	AC Induction	Rated Motor/Generator Power	133
Motor/Generator Type 4	AC Induction	Rated Motor/Generator Power	91
Mfr Fuel Cell Description	--		
Fuel Cell On-Board H2 Storage Capacity (kg)	--	Usable H2 Fill Capacity (kg)	--
Mfr Hybrid Electric/ Electric Vehicle Comments	2022 MY Model Y AWD Carline; Base Front - 91 kW; Rear - 200 kW Perf Front - 133 kW; Rear - 179 kW		

Certification Summary Information Report

Test Group	NTSLV00.0L2Y		Evaporative/Refueling Family	--							
Emission Data Vehicle Information											
Vehicle ID / Configuration	YD221-R00562 / 0		Manufacturer Vehicle Configuration Number	0							
Original Test Group Name	MTSLV00.0L2Y		Original Evaporative/Refueling Family	--							
Original Test Vehicle Model Year	2021										
Vehicle Model											
Represented Test Vehicle Make	Tesla		Represented Test Vehicle Model	Model Y Performance AWD							
Leak Family Details											
Leak Family Identifier	--		Leak Family Name	--							
Drive Sources and Fuel System Details											
<table border="1"> <thead> <tr> <th>Drive Source and Fuel#</th> <th>Drive Source</th> <th>Fuel</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Electric Motor</td> <td>Electricity</td> </tr> </tbody> </table>						Drive Source and Fuel#	Drive Source	Fuel	1	Electric Motor	Electricity
Drive Source and Fuel#	Drive Source	Fuel									
1	Electric Motor	Electricity									
Hybrid Indicator	No		Multiple Fuel Combustion	--							
Multiple Fuel Storage	--		Rechargeable Energy Storage System Indicator	Yes							
Fuel Cell Indicator	No		Rechargeable Energy Storage System, if 'Other'	--							
Rechargeable Energy Storage System	Battery(s)										
Off-board charge Capable Indicator	Yes		Odometer Correction Factor	1							
Odometer Correction -- Initial	1										
Odometer Correction Sign	- = System Miles is equal to (Test odometer reading - Initial system miles) * Correction factor										
Odometer Correction Units	Miles										
Engine Code	L2Y		Rated Horsepower	418							
Displacement (liters)	0.001		Air Aspiration Method, if 'Other'								
Air Aspiration Method	Naturally Aspirated		Air Aspiration Device Configuration	--							
Number of Air Aspiration Devices	--		Drive Mode While Testing	All Wheel Drive							
Charge Air Cooler Type	--		Aged Emission Components	4,000 (mi)							
Shift Indicator Light Usage	Not equipped		Equivalent Test Weight (pounds)	4750							
Curb Weight (lbs)	4416		N/V Ratio	108.4							
GVWR (lbs)	5712										
Axle Ratio	9.04		# of Transmission Gears	1							
Transmission Type	Automatic		Creeper Gear	No							
Transmission Lockup	No										
Dynamometer Coefficients:											
Target Coefficients			Set Coefficients								
Coefficient Category	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients				
City/Highway/Evap	45.49	0.172	0.016	-1.41	0.0982	0.0145	12.5				
Cold CO	50.04	0.1892	0.0176	-14.85	0.0424	0.0142	N/A				

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Emission Control Device Comments	No Emissions Control Device - Pure Electric		
Manufacturer Test Vehicle Comments	This is 2021 Model Y Performance AWD; Front Motor Power - 133 kW; Rear Motor Power - 179 kW;		
Test #	MTSL10067005	Test Procedure	2 - CVS 75 and later (w/o can. load)
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/17/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1795	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	3.2301	--
DT-EER (Drive Trace Energy Economy Rating)	3.0731	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	5.2995	--
MFR FE (Manufacturer Fuel Economy)	19.7981	170.2183543
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0

Manufacturer Test Comments

Internal Test results (CVS-75 UDDS Ambient) for MY2021 Model Y Performance AWD. AC wh/mi @ 50 % SOC - Bag 1 - 222.98; Bag 2- 190.28; Bag 3 - 215.37; Bag 4 - 187.66; Test Start Odometer Reading 3275 Test Start Propulsion System Mileage 1795

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Test #	MTSL10066999	Test Procedure	3 - HWFE
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/17/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1795	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
DT-ASCR (Drive Trace Absolute Speed Change Rating)	6.9986	--
DT-EER (Drive Trace Energy Economy Rating)	0.9719	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	8.7448	--
MFR FE (Manufacturer Fuel Economy)	20.8356	161.7424024
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0

Manufacturer Test Comments

Internal Test results (HWY 3) for MY2021 Model Y Performance AWD. The HFET result from the full discharge MCT is used for the 2-part and 5-part calculations. AC wh/mi - 208.36; Test Start Odometer Reading 3275 Test Start Propulsion System Mileage 1795

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Test #	MTSL10067000	Test Procedure	90 - US06
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/17/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1795	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	2.1886	--
DT-EER (Drive Trace Energy Economy Rating)	1.4372	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	4.229	--
MFR FE (Manufacturer Fuel Economy)	29.3349	114.880228
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Manufacturer Test Comments

Internal Test results (US 06) for MY2021 Model Y Performance AWD. US 06 AC wh/mi @ 50% SOC - City:293.35; Hwy:274.90. Test Start Odometer Reading 3275 Test Start Propulsion System Mileage 1795

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Test #	MTSL10067001	Test Procedure	95 - SC03
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/17/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1795	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	-0.6781	--
DT-EER (Drive Trace Energy Economy Rating)	-0.1283	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	-0.6796	--
MFR FE (Manufacturer Fuel Economy)	23.0537	146.1804396
NOX (Nitrogen Oxide)	0	--
NMOG (Non-methane organic gases)	0	--

Manufacturer Test Comments

Internal Test results (SC 03) for MY2021 Model Y Performance AWD. AC wh/mi - 230.54 at 50% SOC. Test Start Odometer Reading 3275 Test Start Propulsion System Mileage 1795

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Test #	MTSL10066998	Test Procedure	84 - Charge Depleting Highway
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/17/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1795	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	92.213
Charge Depleting Range (Calculated miles)	376	Charge Depleting Range (Actual miles)	376
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	376		
Number of Charge Depleting Bags/Phases Conducted	2	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	4.7478	
5	Drive Trace Energy Economy Rating	1.0492	
6	Drive Trace Inertia Work Ratio Rating	5.7805	
7	Manufacturer Fuel Economy	137.53	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	81.052	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2021 Model Y Performance AWD. Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC - 81052 wh (System error limited to 4 digits). MCT dc wh/mi is attached with application. Test Start Odometer Reading 3275 Test Start Propulsion System Mileage 1795		

Certification Summary Information Report

Test Group		NTSLV00.0L2Y				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Test #	MTSL10067002	Test Procedure	86 - Charge Depleting 20 Degree F FTP
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/17/2020	Fuel	N/A
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	N/A	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1795	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	80.329
Charge Depleting Range (Calculated miles)	253	Charge Depleting Range (Actual miles)	253
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	253		
Number of Charge Depleting Bags/Phases Conducted	34	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	-0.0136	
5	Drive Trace Energy Economy Rating	0.3539	
6	Drive Trace Inertia Work Ratio Rating	0.1356	
7	Manufacturer Fuel Economy	27.932	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	70.606	
13	System Start State of Charge Watt-hours	0	

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Manufacturer Test Comments	Internal Test results(Cold UDDS) for MY2021 Model Y Performance AWD. END SOC is 70606 wh (System error limited to 4 digits) for full discharge. AC wh/mi - Bag 1 - 449.10; Bag 2 - 409.81; Bag 3 - 410.37; Bag - 4- 364.45; Tesla did not use external current measurement after the full cold discharge test, since AC energy is not used in any part of the 5-cycle consumption calculation. The stated recharge energy is an estimate using the DC energy from the cold discharge test and the round trip energy efficiency from the full discharge MCT. Test Start Odometer Reading 3275 Test Start Propulsion System Mileage 1795		

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Test #	MTSL10067003	Test Procedure	81 - Charge Depleting UDDS
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	09/17/2020	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1795	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	92.213
Charge Depleting Range (Calculated miles)	409	Charge Depleting Range (Actual miles)	409
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	409		
Number of Charge Depleting Bags/Phases Conducted	4	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	2.1351	
5	Drive Trace Energy Economy Rating	2.2593	
6	Drive Trace Inertia Work Ratio Rating	3.4216	
7	Manufacturer Fuel Economy	149.63	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	81.052	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2021 Model Y Performance AWD. Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC 81052 wh (system gave error limited to 4 digits). MCT dc wh/mi is attached with EPA application. Added NMOG Test results. Test Start Odometer Reading 3275 Test Start Propulsion System Mileage 1795		

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
-------------------	--------------	-------------------------------------	----

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
-------------------	--------------	-------------------------------------	----

Emission Data Vehicle Information

Vehicle ID / Configuration	YD222-231326 / 0	Manufacturer Vehicle Configuration Number	0
Original Test Group Name	NTSLV00.0L2Y	Original Evaporative/Refueling Family	--
Original Test Vehicle Model Year	2022		
Vehicle Model			
Represented Test Vehicle Make	Tesla	Represented Test Vehicle Model	Model Y Long Range AWD

Leak Family Details

Leak Family Identifier	--	Leak Family Name	--
------------------------	----	------------------	----

Drive Sources and Fuel System Details

Drive Source and Fuel#	Drive Source	Fuel
1	Electric Motor	Electricity

Hybrid Indicator	No	Multiple Fuel Combustion	--
Multiple Fuel Storage	--	Rechargeable Energy Storage System Indicator	Yes
Fuel Cell Indicator	No	Rechargeable Energy Storage System, if 'Other'	--
Rechargeable Energy Storage System	Battery(s)		
Off-board charge Capable Indicator	Yes	Odometer Correction Factor	1
Odometer Correction -- Initial	1	- = System Miles is equal to (Test odometer reading - Initial system miles) * Correction factor	
Odometer Correction Sign			
Odometer Correction Units	Miles	Rated Horsepower	390
Engine Code	L2Y	Air Aspiration Method, if 'Other'	
Displacement (liters)	0.001	Air Aspiration Device Configuration	--
Air Aspiration Method	Naturally Aspirated	Drive Mode While Testing	All Wheel Drive
Number of Air Aspiration Devices	--	Aged Emission Components	4,000 (mi)
Charge Air Cooler Type	--	Equivalent Test Weight (pounds)	4750
Shift Indicator Light Usage	Not equipped	N/V Ratio	108
Curb Weight (lbs)	4381	# of Transmission Gears	1
GVWR (lbs)	5240	Creeper Gear	No
Axle Ratio	1		
Transmission Type	Automatic		
Transmission Lockup	No		

Dynamometer Coefficients:

Coefficient Category	Target Coefficients			Set Coefficients			EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients
	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	
City/Highway/Evap	34.26	0.3191	0.0142	-15.74	0.4104	0.0107	11.4

Emission Control Device Comments No Emissions Control Device - Pure Electric

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Manufacturer Test Vehicle Comments	This is 2022 Model Y Long Range AWD; Front Motor Power - 91 kW; Rear Motor Power - 200 kW;		

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Test #	NTSL10071764	Test Procedure	81 - Charge Depleting UDDS
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/11/2021	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	2265	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	91.115
Charge Depleting Range (Calculated miles)	446	Charge Depleting Range (Actual miles)	446
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	446		
Number of Charge Depleting Bags/Phases Conducted	4	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	0.2687	
5	Drive Trace Energy Economy Rating	-0.3787	
6	Drive Trace Inertia Work Ratio Rating	0.4438	
7	Manufacturer Fuel Economy	164.8	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	80.708	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2022 Model Y Long Range AWD. Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC 80708 wh (system gave error limited to 4 digits). MCT dc wh/mi is attached with EPA application. Added NMOG Test results.		

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
-------------------	--------------	-------------------------------------	----

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Test #	NTSL10071765	Test Procedure	84 - Charge Depleting Highway
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	08/11/2021	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	EPA Assigned
Verify Test Lab ID	Tesla Kato		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	2265	Odometer Units	M
4WD Test Dyno	Yes	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	208	Recharge Event Energy (kiloWatt-hours)	91.115
Charge Depleting Range (Calculated miles)	411	Charge Depleting Range (Actual miles)	411
All Electric Range Unadjusted (miles)	--	Derived 5-Cycle Coefficient Model Year	--
Equivalent All Electric Range (miles)	411		
Number of Charge Depleting Bags/Phases Conducted	2	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase			
Charge Depleting Bag/Phase #	Test Result/Emission Name	Unrounded Test Result	
1	Carbon Monoxide	0	
2	Carbon dioxide	0	
3	Carbon-Related Exhaust Emissions	0	
4	Drive Trace Absolute Speed Change Rating	0.821	
5	Drive Trace Energy Economy Rating	-0.1289	
6	Drive Trace Inertia Work Ratio Rating	1.1214	
7	Manufacturer Fuel Economy	152.06	
8	Nitrogen Oxide	0	
9	Non-methane organic gases	0	
10	Non-methane organic gases plus Nitrogen Oxides	999.999	
11	Particulate Matter	0	
12	System End State of Charge Watt-hours	80.708	
13	System Start State of Charge Watt-hours	0	
Manufacturer Test Comments	Internal Test results for MY2022 Model Y Long Range AWD. Range determined by using SAE J1634 Multi-cycle test procedure. END-SOC - 80708 wh (System error limited to 4 digits). MCT dc wh/mi is attached with application.		

Certification Summary Information Report

Test Group		NTSLV00.0L2Y				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 0	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--
Fuel Properties												

Certification Summary Information Report

Test Group		NTSLV00.0L2Y			Evaporative/Refueling Family			--		
Consolidated List of Standards										
Exhaust Standards										
Cert Region		Federal			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			Federal Tier 3 Bin 0		
Fuel		Electricity			Test Procedure			CVS 75 and later (w/o can. load)		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	
Cert Region		Federal			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			Federal Tier 3 Bin 0		
Fuel		Electricity			Test Procedure			Charge Depleting Highway		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0	
150,000 miles	CREE	--	--	--	--	--	--	0	0	
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0	
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			California ZEV		
Fuel		Electricity			Test Procedure			CVS 75 and later (w/o can. load)		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	

Certification Summary Information Report

Test Group		NTSLV00.0L2Y			Evaporative/Refueling Family			--		
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			California ZEV		
Fuel		Electricity			Test Procedure			Charge Depleting UDDS		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0	
150,000 miles	CREE	--	--	--	--	--	--	0	0	
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0	
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			California ZEV		
Fuel		Electricity			Test Procedure			Charge Depleting Highway		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0	
150,000 miles	CREE	--	--	--	--	--	--	0	0	
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0	
Cert Region		Federal			Cert/In-Use Code			Cert		
Vehicle Class		LDV/Passenger Car			Standard Level			Federal Tier 3 Bin 0		
Fuel		Electricity			Test Procedure			Charge Depleting UDDS		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std	
150,000 miles	CO	--	--	--	--	--	--	0	0	
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0	
150,000 miles	CREE	--	--	--	--	--	--	0	0	
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0	

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
Glossary			
Useful Life			
4	4,000 miles	120	120,000 miles
50	50,000 miles	150	150,000 miles
100	100,000 miles		
Emission Name			
HC-TOTAL	Total Hydrocarbon	METHANOL	CH3OH - Methanol
CO	Carbon Monoxide	N2O	Nitrous Oxide
CO2	Carbon dioxide	SPITBACK	Spitback Hydrocarbon in grams
CREE	Carbon-Related Exhaust Emissions	AMP-HRS	Integrated Amp-hours
OPT-CREE	Optional Carbon-Related Exhaust Emissions	START-SOC	System Start State of Charge Watt-hours
NOX	Nitrogen Oxide	END-SOC	System End State of Charge Watt-hours
PM	Particulate Matter	ACT-DISTANCE	Actual Distance Driven (miles)
PM-COMP	SFTP Composite Particulate Matter	AS-VOLT	Average System Voltage
HC-NM	Non-methane Hydrocarbon	CO2 BAG 1	Bag 1 Carbon Dioxide
OMHCE	Organic material Hydrocarbon Equivalent	CO2 BAG 2	Bag 2 Carbon Dioxide
OMNMHCE	Organic material non-methane HC equivalent	CO2 BAG 3	Bag 3 Carbon Dioxide
NMOG	Non-methane organic gases	CO2 BAG 4	Bag 4 Carbon Dioxide
HCHO	Formaldehyde	NMOG+NOX	Non-methane organic gases plus Nitrogen Oxides
H3C2HO	Acetaldehyde	NMOG+NOX-COMP	SFTP Composite Non-methane Organic Gases + Nitrogen Oxides
HC-NM+NOX	SFTP Non-methane Hydrocarbon + Nitrogen Oxides for US06 or SC03	DT-IWRR	Drive Trace Inertia Work Ratio Rating
HC-NM+NOX-COMP	SFTP Composite Non-methane Hydrocarbon + Nitrogen Oxides	DT-ASCR	Drive Trace Absolute Speed Change Rating
CO-COMP	SFTP Composite Carbon Monoxide	DT-EER	Drive Trace Energy Economy Rating
ETHANOL	C2H5OH - Ethanol	COMB-CREE	Combined Carbon-Related Exhaust Emissions
FE BAG 1	Bag 1 Fuel Economy	COMB-OPT-CREE	Combined Optional Carbon-Related Exhaust Emissions
FE BAG 2	Bag 2 Fuel Economy	HC-TOTAL-EQUIV	Total Hydrocarbon equivalent - Evap only
FE BAG 3	Bag 3 Fuel Economy	METHANE-COMB	Combined CH4 for HD 2b/3 vehicles only
FE BAG 4	Bag 4 Fuel Economy	N2O-COMB	Combined Nitrous Oxide for HD 2b/3 vehicles only
MFR FE	Manufacturer Fuel Economy	LEAK-DIA	Effective Leak Diameter (inches)
HC	Hydrocarbon for Running Loss and ORVR	LEAK-GAS CAP	Gas Cap Leakage (cc/min)
METHANE	CH4 - Methane	CO2-COMB	Combined Carbon Dioxide for HD 2b/3 Vehicles Only
Certification Region			
CA	California + CAA Section 177 states	FA	Federal
Exhaust Emission Standard Level			
B1	Federal Tier 2 Bin 1	L3ULEV340	California LEV-III ULEV340
B2	Federal Tier 2 Bin 2	L3ULEV250	California LEV-III ULEV250
B3	Federal Tier 2 Bin 3	L3ULEV200	California LEV-III ULEV200
B4	Federal Tier 2 Bin 4	L3SULEV170	California LEV-III SULEV170
B5	Federal Tier 2 Bin 5	L3SULEV150	California LEV-III SULEV150

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family	--
B6	Federal Tier 2 Bin 6	L3LEV630	California LEV-III LEV630
B7	Federal Tier 2 Bin 7	L3ULEV570	California LEV-III ULEV570
B8	Federal Tier 2 Bin 8	L3ULEV400	California LEV-III ULEV400
B9	Federal Tier 2 Bin 9	L3ULEV270	California LEV-III ULEV270
B10	Federal Tier 2 Bin 10	L3SULEV230	California LEV-III SULEV230
B11	Federal Tier 2 Bin 11	L3SULEV200	California LEV-III SULEV200
HDV1	HDV1 (Federal HD chassis Class 2b GVW 8501-10000)	T3B160	Federal Tier 3 Bin 160
HDV2	HDV2 (Federal HD chassis Class 3 GVW 10001-14000)	T3B125	Federal Tier 3 Bin 125
L2	California LEV-II LEV	T3B110	Federal Tier 3 Transitional Bin 110
L2OP	California LEV-II LEV Optional	T3B85	Federal Tier 3 Transitional Bin 85
U2	California LEV-II ULEV	T3SULEV30	Federal Tier 3 Transitional LEV-II SULEV30 Carryover
S2	California LEV-II SULEV	T3B70	Federal Tier 3 Bin 70
ZEV	California ZEV	T3B50	Federal Tier 3 Bin 50
OT	Other	T3B30	Federal Tier 3 Bin 30
T1	Federal Tier 1	T3B20	Federal Tier 3 Bin 20
PZEV	California PZEV	T3B0	Federal Tier 3 Bin 0
L2LEV160	California LEV-II LEV160	HDV2B395	Federal Tier 3 HD Class 2b Transitional Bin 395
L2ULEV125	California LEV-II ULEV125	HDV2B340	Federal Tier 3 HD Class 2b Transitional Bin 340
L2SULEV30	California LEV-II SULEV30	HDV2B250	Federal Tier 3 HD Class 2b Bin 250
L2LEV395	California LEV-II LEV395	HDV2B200	Federal Tier 3 HD Class 2b Bin 200
L2ULEV340	California LEV-II ULEV340	HDV2B170	Federal Tier 3 HD Class 2b Bin 170
L2LEV630	California LEV-II LEV630	HDV2B150	Federal Tier 3 HD Class 2b Bin 150
L2ULEV570	California LEV-II ULEV570	HDV2B0	Federal Tier 3 HD Class 2b Bin 0
L3LEV160	California LEV-III LEV160	HDV3B630	Federal Tier 3 HD Class 3 Transitional Bin 630
L3ULEV125	California LEV-III ULEV125	HDV3B570	Federal Tier 3 HD Class 3 Transitional Bin 570
L3ULEV70	California LEV-III ULEV70	HDV3B400	Federal Tier 3 HD Class 3 Bin 400
L3ULEV50	California LEV-III ULEV50	HDV3B270	Federal Tier 3 HD Class 3 Bin 270
L3SULEV30	California LEV-III SULEV30	HDV3B230	Federal Tier 3 HD Class 3 Bin 230
L3SULEV20	California LEV-III SULEV20	HDV3B200	Federal Tier 3 HD Class 3 Bin 200
L3LEV395	California LEV-III LEV395	HDV3B0	Federal Tier 3 HD Class 3 Bin 0
Transmission Type Code			
AMS	Automated Manual- Selectable (e.g. Automated Manual with paddles)	M	Manual
A	Automatic	OT	Other
AM	Automated Manual	SA	Semi-Automatic
CVT	Continuously Variable	SCV	Selectable Continuously Variable (e.g. CVT with paddles)
Drive System Code			
4	4-Wheel Drive	P	Part-time 4-Wheel Drive
F	2-Wheel Drive, Front	A	All Wheel Drive
R	2-Wheel Drive, Rear		

Certification Summary Information Report

Test Group	NTSLV00.0L2Y	Evaporative/Refueling Family		--
Additional Terms and Acronyms				
AFC	Alternative Fuel Converter	ICI	Independent Commercial Importer	
CSI	Certificate Summary Information	ORVR	Onboard Refueling Vapor Recovery	
DF	Deterioration Factor	SIL	Shift Indicator Light	
Evap	Evaporation, Evaporative	Trans	Transmission	